

HANGZHOU BAIQUAN ELECTROMECHANICAL CO.,LTD.

HANGZHOU BAIQUAN ELECTROMECHANICAL CO., LTD.

WhatsApp: +86-13758194294


Email: biz@cnspeedway.com

Website: <https://agricparts.com/>

Add: Room 207, Building 3, No.100 Chunchao Road, Economic And Technological Development Zone, Hangzhou, Zhejiang,China

MAKE SPROCKET CAREFULLY




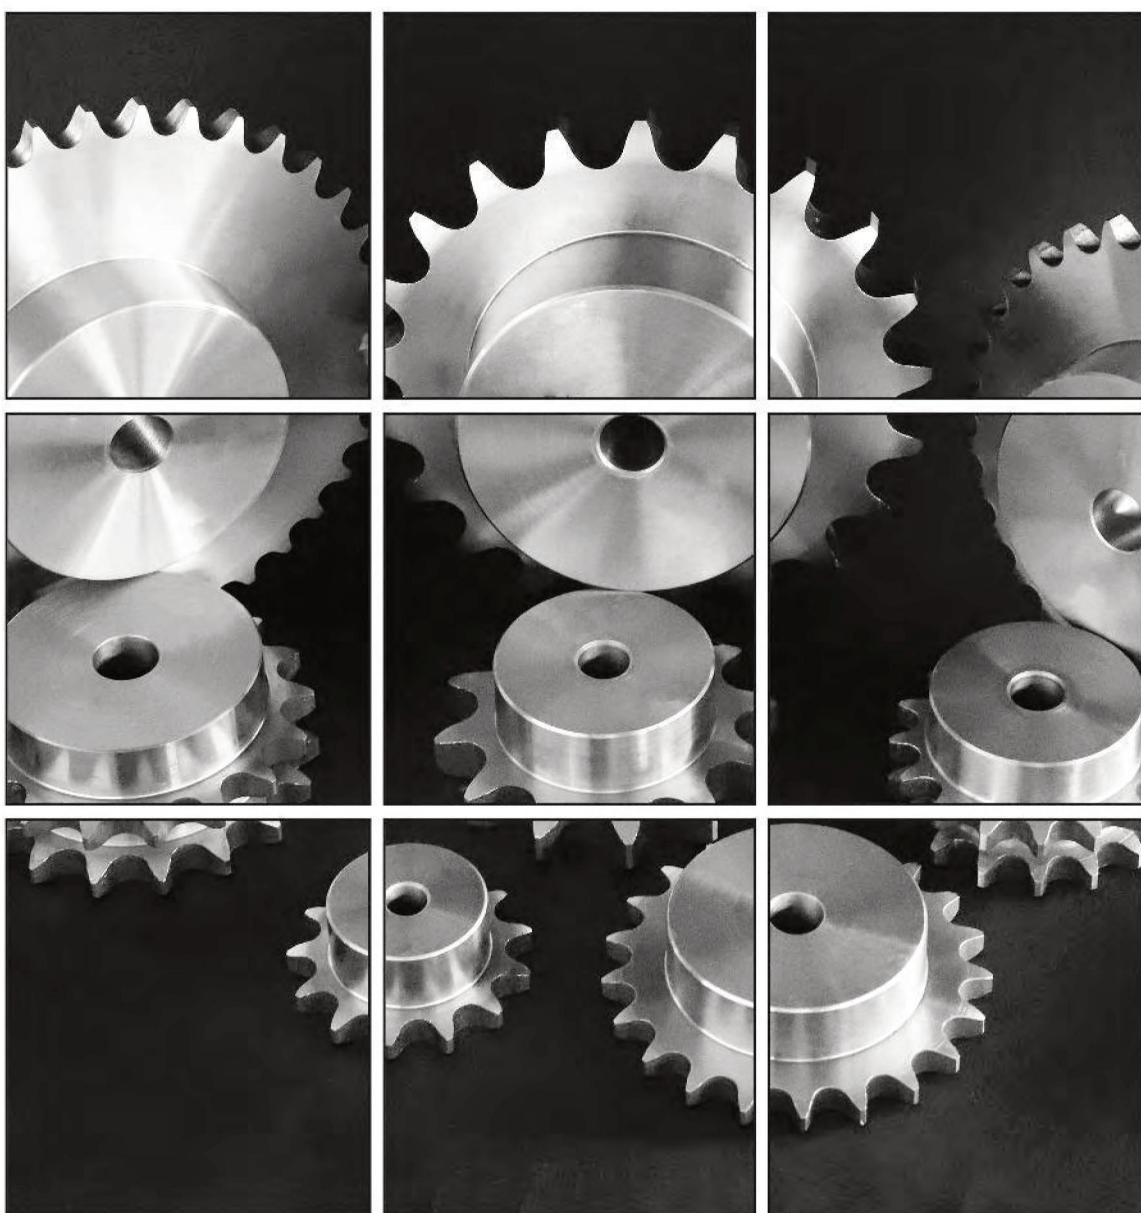

CONTENTS

目录


A系列链轮的轴向齿廓及参数	13
Series A sprocket axial profile and parameters	13
B系列链轮的轴向齿廓及参数	14
Series B sprocket axial profile and parameters	14
成品孔链轮	15-27
Finished Hole Sprocket	15-27
标准孔链轮	28-40
Standard Hole Sprocket	28-40
链条联轴器链轮	41
Chain coupling sprocket	41
双驱动链轮	42
Double Drive Sprocket	42
双节距滚子链链轮	43-44
Double pitch roller sprocket	43-44
倍速链轮	45
Double Speed Sprocket	45
惰轮	46-48
Idler	46-48
输送链链轮	49-50
Conveyor sprocket	49-50
正齿轮	51-54
Spur gear	51-54
伞齿轮	55
Bevel gear	55

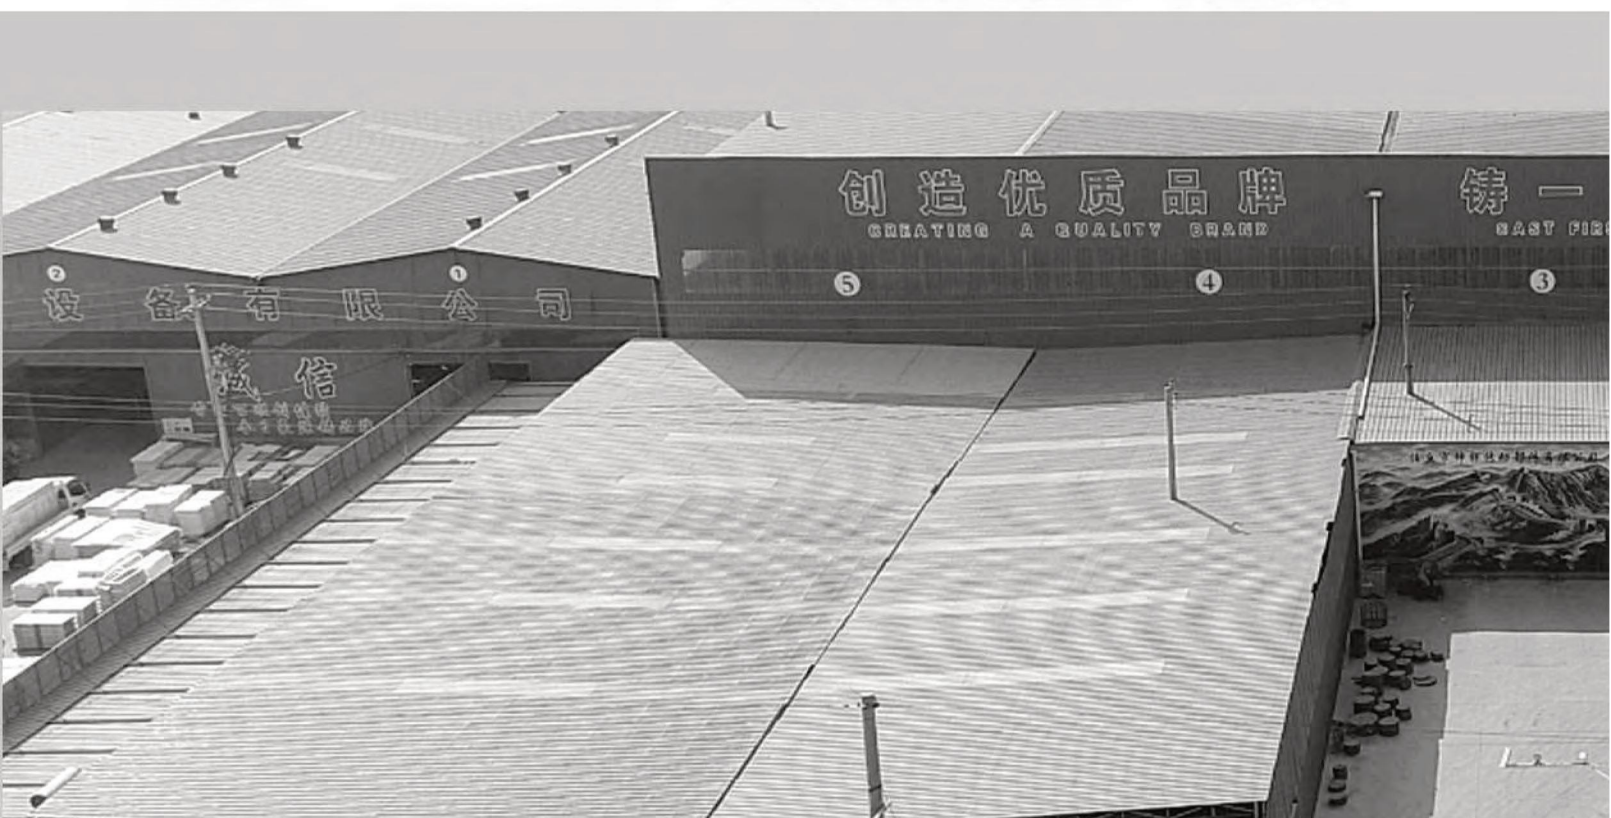

企业简介

COMPANY PROFILE



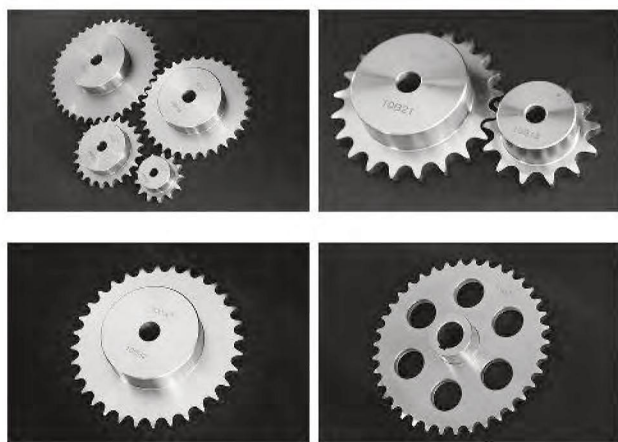

我们的产品

我们主要以生产链轮、齿轮、联轴器以及法兰等一系列传动部件，并拥有自己的锻造车间、热处理车间以及精密的生产和检验设备。从原料、毛坯到成品，公司严把质量关，做到精益求精，不爽毫厘。

We mainly produce a series of transmission components such as sprockets, gears, couplings, and flanges, and have our own forging workshop, heat treatment workshop, and precision production and inspection equipment. From raw materials, raw materials to finished products, the company strictly controls quality and strives for excellence without any dissatisfaction.



OUR PRODUCTS

行业应用



由于我们的柔性化和个性化的制造工艺，我们的产品广泛应用于各种工业领域，农业机械，物流运输机械，食品机械，包装机械，印刷机械，立体停车库，电梯等等。

Due to our flexible and personalized manufacturing processes, our products are widely used in various industrial fields, such as agricultural machinery, logistics and transportation machinery, food machinery, packaging machinery, printing machinery, three-dimensional parking garages, elevators, and so on.

VERSATILE APPLICATION









中国
制造

MADE IN CHINA


KNC OW HG OW MEETS CHALLENGE




A系列链轮的轴向齿廓及参数

Series A sprocket axial profile and parameters


单排
Single Row




双排
Double Row



叁排
Three Row



肆排
Four Row



链轮	节距 P	滚子 直径 Dia φ	h	倒角高 A	倒角宽 C	倒角 半径 R	排距 Pt	单排	双排 叁排			肆排			
								齿厚 t ₁	齿厚 t ₂ ,t ₃	齿幅		齿厚 t ₄	齿幅		
										B ₂	B ₃		B ₂	B ₃	B ₄
25	6.35	3.30	4.0	3.2	0.8	6.8	6.4	2.8	2.7	9.10	15.3	2.4	8.8	15.2	21.6
35	9.525	5.08	5.0	4.8	1.2	10.2	10.13	4.3	4.1	14.2	24.4	3.8	13.90	24.0	34.1
410	12.70	7.77	7.0	7.0	1.1	19.2	—	2.8	—	—	—	—	—	—	—
415	12.70	7.77	7.0	7.0	1.6	13.5	—	4.3	—	—	—	—	—	—	—
41	12.70	7.77	7.0	6.4	1.6	13.5	—	5.8	—	—	—	—	—	—	—
40	12.70	7.94	7.0	6.4	1.6	13.5	14.38	7.2	7.0	21.4	35.8	6.5	20.9	35.3	49.7
50	15.875	10.16	10.3	7.9	2.0	16.9	18.11	8.7	8.4	26.5	44.7	7.9	26.0	44.1	62.2
60	19.05	11.91	11.8	9.5	2.4	20.3	22.78	11.7	11.3	34.1	56.9	10.6	33.4	56.2	79.0
80	25.40	15.88	15.5	12.7	3.2	27.0	29.29	14.6	14.1	43.4	72.7	13.3	42.6	71.9	101.2
100	31.75	19.05	19.2	15.9	4.0	33.8	35.76	17.6	17	52.8	88.7	16.0	51.8	87.6	123.4
120	38.10	22.22	23.0	19.1	4.8	40.5	45.44	23.6	22.7	68.1	113.9	21.5	66.9	112.3	157.7
140	44.45	25.40	27.0	22.2	5.6	47.2	48.87	23.6	22.7	71.6	120.7	21.5	70.4	119.3	168.3
160	50.80	28.58	31.6	25.4	6.4	54.0	58.55	29.6	28.4	86.9	146.1	27.0	85.5	144.0	202.5
180	57.15	35.71	36.8	28.5	7.2	61.0	65.8	33.1	32.0	97.8	163.6	30.4	96.2	162.0	227.8
200	63.50	39.67	39.6	31.8	7.9	67.5	71.6	35.3	34.1	105.7	177.3	32.5	104.1	175.7	247.3
240	76.20	47.62	48.5	38.1	9.5	81.0	87.8	44.1	42.7	130.5	218.3	40.7	128.5	216.3	304.1

备注:

1、h为节圆到凸台（或槽底）的最小距离。 2、4排以上的链轮齿厚与4排链轮齿厚 t_4 相同，齿幅为 $B_n=(n-1)P_t+t_4(n \geq 4)$ 。


Note:

1. h is the minimum distance from the pitch circle to the boss (or groove bottom).

2. 4 row above sprocket tooth thickness is the same as 4 row sprocket tooth thickness t_4 , the tooth width is $B_n=(n-1)P_t+t_4(n \geq 4)$.

B系列链轮的轴向齿廓及参数

Series B sprocket axial profile and parameters

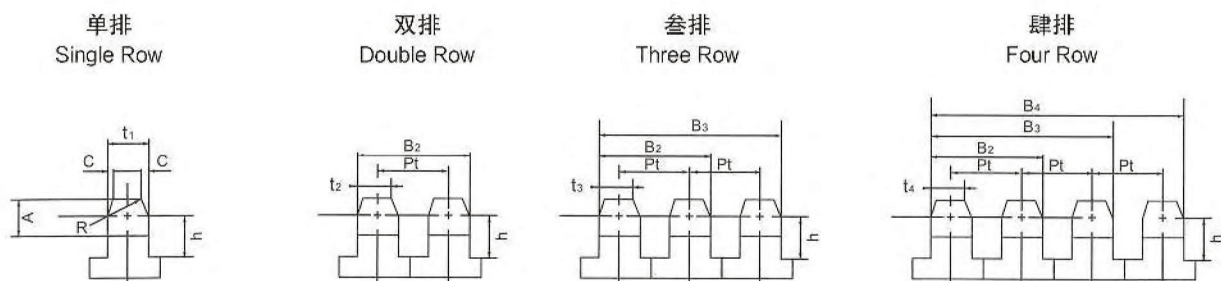

链轮	节距 P	滚子 直径 Dia ϕ	h	倒角高 A	倒角宽 C	倒角 半径 R	排距 P_t	单排	双排		叁排		肆排		
								齿厚 t_1	齿厚 t_2, t_3	齿幅		齿厚 t_4	齿幅		
										B_2	B_3		B_2	B_3	B_4
04	6	4	4.1	3	0.6	6	—	2.6	2.5	—	—	2.4	—	—	—
05	8	5	5.3	4	0.8	8	5.6	2.8	2.7	8.3	13.9	2.6	8.2	13.8	19.4
06	9.525	6.35	6.2	4.8	1	10	10.2	5.3	5.2	15.4	25.6	5.0	15.2	25.4	35.6
08	12.70	8.51	8.4	6.4	1.3	13	13.9	7.2	7.0	21.0	34.9	6.8	20.7	34.6	48.5
10	15.875	10.16	10.2	7.9	1.6	16	16.6	9.1	8.9	25.5	42.2	9.0	25.6	42.2	58.8
12	19.05	12.07	11.2	9.5	2	19	19.5	11.1	10.8	30.2	49.9	10.9	30.4	49.9	69.4
16	25.40	15.88	14.6	12.7	2.5	26	31.9	16.2	15.8	47.7	79.6	15.8	47.7	79.6	111.5
20	31.75	19.05	18.0	15.9	3.5	32	36.5	18.5	18.2	54.6	91.0	18.2	54.6	91.0	127.5
24	38.10	25.4	22.4	19.1	4	38	48.4	24.1	23.6	72.0	120.3	23.6	72.0	120.3	168.7
28	44.45	27.94	24.9	22.2	5	44	59.6	29.4	28.8	88.4	148.0	28.8	88.4	148.0	207.6
32	50.80	29.21	28.2	25.4	6	51	58.6	29.4	28.8	87.4	146.0	28.8	87.4	146.0	204.6
40	63.50	39.37	34.9	31.8	8	64	72.3	36.2	35.4	107.7	180.0	35.4	107.7	180.0	252.3
48	76.20	48.26	41.8	38.1	9	76	91.2	43.3	42.5	133.7	224.9	42.5	133.7	224.9	316.1
56	88.90	53.98	50.2	44.5	11	89	106.6	50.7	49.6	156.2	262.8	49.6	156.2	262.8	369.4
64	101.60	63.5	57.8	50.8	13	102	119.9	57.9	56.7	176.6	296.5	56.7	176.6	296.5	416.4
72	114.30	72.39	66.0	57.2	15	114	136.3	65.2	63.8	200.1	336.4	63.8	200.1	336.4	472.7

备注:

1、h为节圆到凸台（或槽底）的最小距离。 2、4排以上的链轮齿厚与4排链轮齿厚 t_4 相同，齿幅为 $B_n=(n-1)P_t+t_4(n \geq 4)$ 。

Note:

1. h is the minimum distance from the pitch circle to the boss (or groove bottom).

2. 4 row above sprocket tooth thickness is the same as 4 row sprocket tooth thickness t_4 , the tooth width is $B_n=(n-1)P_t+t_4(n \geq 4)$.

成品孔链轮 Finished Hole Sprocket

所有链轮均采用齿部淬火、回火，以延长链轮使用寿命；链轮带有键槽和两个螺孔，也可以按客户要求生产。


All sprockets are tooth quenching, tempering to extend the sprocket life; sprockets with keyway and two screw holes, can also be produced according to customer requirements.

孔径 D^{H7}	键槽 $B \times t_k$
>6~8	2×1.0
>8~10	3×1.4
>10~12	4×1.8
>12~17	5×2.3
>17~22	6×2.8
>22~30	8×3.3
>30~38	10×3.3
>38~44	12×3.3
>44~50	14×3.8
>50~58	16×4.3
>58~65	18×4.4
>65~75	20×4.9
>75~85	22×5.4
>85~95	25×5.4
>95~110	28×6.4
>110~130	32×7.4
>130~150	36×8.4
>150~170	40×9.4
>170~200	45×10.4
>200~230	50×11.4



孔径 D^{H7}	螺孔 M
5~7	3
8~9	4
10	4
12	5
14~22	6
24~42	8
45~50	10
55~65	12
≥70	16

轴孔加工式样

Bore-Keyway-Screws




键槽中心对准齿尖中心
Center the Keyway at the center of the tooth tip

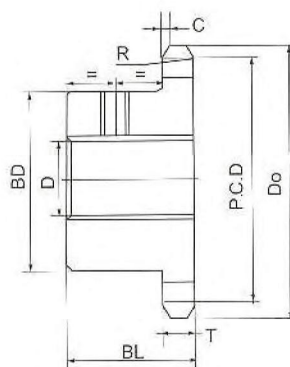


FBS11B 成品孔链轮


FBS11B Finished Hole Sprocket



B-I

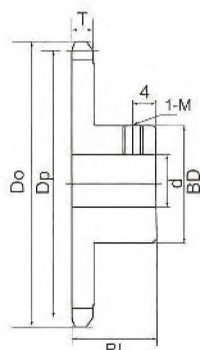

B-II



链号	No	11B
链条节距	P	3.7465mm
链条内宽	W	1.83 mm
滚子直径	Dr	2.285 mm
齿宽	T	1.6 mm

齿数	型号	外径 Do	节径 P.C.D	孔径 D		凸台直径 BD	全长 BL	止动螺丝孔	形状	a	重量 g
				最小	最大						
12	B-I 型	16.2	14.475	4	6	9.4	10.5	M3x0.5	切削 规格	4	5.9
15		19.9	18.020	4	9	13	10.5			4	11.5
16		21.1	19.204	4	9	14	10.5			4	13.5
18		23.5	21.575	4	11	16	10.5			4	17.7
20	B-I 型	25.9	23.949	6	13	19	10.5	M4x0.7	切削 规格	4	23.3
24		30.7	28.703	6	13	19	10.5			4	25.7
28		35.5	33.462	6	13	19	10.5			4	28.7
30	B-II 型	37.9	35.842	6	13	19	10.5	M4x0.7	切削 规格	4	29.7
34		42.7	40.604	6	13	19	10.5			4	37.9
36		45.1	42.986	6	13	19	10.5			4	40.7
40		49.8	47.751	6	13	19	10.5			4	46.5
48		59.4	57.283	6	13	19	10.5			4	60.5

备注:

1、所有型号规格的链轮均采用优质45钢,可定制不锈钢SUS304。

2、链槽、螺孔规格参照第15页。

3、链轮齿部高频淬火、回火。

4、带★链轮的轮毂外径有沟槽,详见右上方表格。

Note:

1. All models and specifications of sprockets are made of high quality 45 steel, can be customized stainless steel SUS304.

2. Refer to page 15 for specifications of chain groove and screw hole. 3. Fprocket teeth high frequency quenching, tempering.

4. The outer diameter of the hub with ★ sprocket has grooves. See the table on the top right for details.

5. Sprocket inner hole belt □ marked as bolt installation form: 120° below keyway.

6. Finished aperture, keyway and screw hole can be customized according to customer needs. 7. Packing: cartons and wooden cases.

5、链轮内孔带□标注为螺栓安装形式为键槽下方120°。

6、成品孔径、键槽和螺孔可根据客户需求定制。



7、包装方式:纸箱+木箱。

FBS15B/FBP15B 成品孔链轮


FBS15B/FBP15B Finished Hole Sprocket




齿顶与键槽中心偏移量 ± 0.3
Offset between tooth top
and keyway center ± 0.3



FBS 型



FBP 型



链号	No	03C
链条节距	P	4.7625mm
链条内宽	W	2.38 mm
滚子直径	Dr	2.48 mm
齿宽	T	2.0 mm

链轮编号		外径	节径	凸台直径	全长	a	重量	孔径 ΦD ^{H7}		
TYPE	齿数	Do	P.C.D	BD	BL		Kg			
FBP 15B	11	19.0	16.90	11	10	4	9	5		
	12	20.5	18.40	12	10	4	10	5	6	
	13	22.0	19.90	14	10	4	14	5	6	8
	14	23.5	21.40	15	12	5	17	8		
	15	25.0	22.91	17	12	5	22	8		
FBP 15B	16	26.5	24.41	18	12	5	23	10		
	17	28.0	25.92	20	14	6	32	10		
	18	29.5	27.43	22	14	6	40	10		
	20	32.5	30.44	24	14	6	49	10		
FBS 15B	24	39.0	36.49	30	16	7	88	10	12	15
	26	42.0	39.51	33	16	7	104	12	15	16
	28	45.0	42.54	37	16	7	131	12	15	16
	30	48.0	45.56	39	16	7	147	12	15	16
	33	52.5	50.10	40	18	8	178	12	15	16
	35	55.5	53.13	40	18	8	182	12	15	16

备注:

- 1、所有型号规格的链轮均采用优质45钢，可定制不锈钢SUS304。
- 2、链槽、螺孔规格参照第15页。
- 3、链轮齿部高频淬火、回火。
- 4、带★链轮的轮毂外径有沟槽，详见右上方表格。

Note:




1. All models and specifications of sprockets are made of high quality 45 steel, can be customized stainless steel SUS304.
2. Refer to page 15 for specifications of chain groove and screw hole.
3. Fprocket teeth high frequency quenching, tempering.
4. The outer diameter of the hub with ★ sprocket has grooves. See the table on the top right for details.
5. Sprocket inner hole belt □ marked as bolt installation form: 120° below keyway.
6. Finished aperture, keyway and screw hole can be customized according to customer needs.
7. Packing: cartons and wooden cases.

- 5、链轮内孔带□标注为螺栓安装形式为键槽下方120°。
- 6、成品孔径、键槽和螺孔可根据客户需求定制。
- 7、包装方式：纸箱+木箱。

FBS25B 成品孔链轮

FBS25B Finished Hole Sprocket

齿顶与键槽中心偏移量 ± 0.3
Offset between tooth top
and keyway center ± 0.3



链号	No	04C
链条节距	P	6.35 mm
链条内宽	W	3.18 mm
滚子直径	Dr	3.30 mm
齿宽	T	2.8 mm

齿数	外径 Do	节径 P.C.D	凸台直径 BD	总长 BL	a	重量 Kg	孔径 ϕD^{H7}			
16	36	32.55	25	15	6	0.06	10	12		
17	38	34.56	25	15	6	0.07	10	12		
18	40	36.57	25	15	6	0.07	10	12		
19	42	38.58	28	15	6	0.08	10	12	15	
20	44	40.59	28	15	6	0.08	10	12	15	
21	46	42.61	28	15	6	0.09	10	12	15	
22	48	44.62	30	15	6	0.10	12	15		
23	50	46.63	30	15	6	0.11	12	15		
24	52	48.65	30	15	6	0.12	12	15		
25	54	50.66	35	15	6	0.14	12	15	16	
26	56	52.68	35	15	6	0.14	12	15	16	
27	58	54.70	35	15	6	0.15	12	15	16	
28	60	56.71	35	15	6	0.15	12	15	16	
30	64	60.75	35	15	6	0.16	12	15	16	
32	68	64.78	40	20	8	0.20	15	16	18	20
34	72	68.82	40	20	8	0.21	15	16	18	20
35	74	70.84	40	20	8	0.21	15	16	18	20
36	76	72.86	40	20	8	0.22	15	16	18	20
38	80	76.90	40	20	8	0.26	15	16	18	20
40	84	80.93	40	20	8	0.27	15	16	18	20

备注:

1、所有型号规格的链轮均采用优质45钢,可定制不锈钢SUS304。

2、链槽、螺孔规格参照第15页。

3、链轮齿部高频淬火、回火。

4、带★链轮的轮毂外径有沟槽,详见右上方表格。

Note:

1. All models and specifications of sprockets are made of high quality 45 steel, can be customized stainless steel SUS304.

2. Refer to page 15 for specifications of chain groove and screw hole. 3. Sprocket teeth high frequency quenching, tempering.

4. The outer diameter of the hub with ★ sprocket has grooves. See the table on the top right for details.

5. Sprocket inner hole belt □ marked as bolt installation form: 120° below keyway.

6. Finished aperture, keyway and screw hole can be customized according to customer needs. 7. Packing: cartons and wooden cases.


5、链轮内孔带□标注为螺栓安装形式为键槽下方120°。

6、成品孔径、键槽和螺孔可根据客户需求定制。



7、包装方式: 纸箱+木箱。

FBS35B 成品孔链轮

FBS35B Finished Hole Sprocket



齿顶与键槽中心偏移量 ± 0.3
Offset between tooth top
and keyway center ± 0.3



标准螺孔位置
Standard screw hole position



孔径 $\Phi D17$ 有 $\square$ 标注
Aperture $\Phi D17$ has $\square$ markings



链号	No	06C
链条节距	P	9.525 mm
链条内宽	W	4.78 mm
滚子直径	Dr	5.08 mm
齿宽	T	4.3 mm

齿数	S	GD
9		17
10		20
11	4.4	23
12		26
13		29

齿数	外径 Do	节径 P.C.D	凸台直径 BD	总长 BL	a	重量 Kg	孔径 $\Phi D17$
9	32	27.85	★ 21.5	20	6	0.06	10
10	35	30.82	★ 24.5	20	6	0.08	10 12
11	38	33.81	★ 27	20	6	0.09	10 12 14 15
12	41	36.80	★ 30.5	20	6	0.12	10 12 14 15 16 17
13	44	39.80	★ 32	20	6	0.12	10 12 14 15 16 17 18
14	47	42.81	32	20	6	0.12	10 12 14 15 16 17 18 19 20
15	51	45.81	35	20	6	0.16	10 12 14 15 16 17 18 19 20
16	54	48.82	37	20	6	0.19	10 12 14 15 16 17 18 19 20 22 24 25
17	57	51.84	41	20	6	0.22	12 14 15 16 17 18 19 20 22 24 25
18	60	54.85	44	20	6	0.25	12 14 15 16 17 18 19 20 22 24 25
19	63	57.87	47	20	6	0.28	12 14 15 16 17 18 19 20 22 24 25 28
20	66	60.89	50	20	6	0.32	12 14 15 16 17 18 19 20 22 24 25 28 30
21	69	63.91	53	20	6	0.36	12 14 15 16 17 18 19 20 22 24 25 28 30 32
22	72	66.93	56	20	6	0.37	12 14 15 16 17 18 19 20 22 24 25 28 30 32
23	75	69.95	60	20	6	0.38	12 14 15 16 17 18 19 20 22 24 25 28 30 32
24	78	72.97	53	22	8	0.43	12 14 15 16 17 18 19 20 22 24 25 28 30 32
25	81	76.00	53	22	8	0.44	15 16 17 18 19 20 22 24 25 28 30 32
26	84	79.02	53	22	8	0.45	15 16 17 18 19 20 22 24 25 28 30 32
27	87	82.05	53	22	8	0.46	15 16 17 18 19 20 22 24 25 28 30 32
28	90	85.07	53	22	8	0.48	15 16 17 18 19 20 22 24 25 28 30 32
30	96	91.12	53	22	8	0.51	15 16 17 18 19 20 22 24 25 28 30 32
31	99	94.15	53	22	8	0.53	
32	102	97.18	53	22	8	0.54	15 16 17 18 19 20 22 24 25 28 30 32
33	105	100.20	53	22	8	0.56	
34	109	103.23	53	22	8	0.57	15 16 17 18 19 20 22 24 25 28 30 32
35	112	106.26	53	22	8	0.59	15 16 17 18 19 20 22 24 25 28 30 32
36	115	109.29	53	22	8	0.61	15 16 17 18 19 20 22 24 25 28 30 32
38	121	115.34	63	25	10	0.82	20 22 24 25 28 30 32 35 38
40	127	121.40	63	25	10	0.85	20 22 24 25 28 30 32 35 38

备注:


- 1、所有型号规格的链轮均采用优质45钢，可定制不锈钢SUS304。
- 2、链槽、螺孔规格参照第15页。
- 3、链轮齿部高频淬火、回火。
- 4、带★链轮的轮毂外径有沟槽，详见右上方表格。

Note:



1. All models and specifications of sprockets are made of high quality 45 steel, can be customized stainless steel SUS304.
2. Refer to page 15 for specifications of chain groove and screw hole.
3. Sprocket teeth high frequency quenching, tempering.
4. The outer diameter of the hub with ★ sprocket has grooves. See the table on the top right for details.
5. Sprocket inner hole belt $\square$ marked as bolt installation form: 120° below keyway.
6. Finished aperture, keyway and screw hole can be customized according to customer needs.
7. Packing: cartons and wooden cases.

FBS06B 成品孔链轮

FBS06B Finished Hole Sprocket



齿顶与键槽中心偏移量 ± 0.3
Offset between tooth top
and keyway center ± 0.3

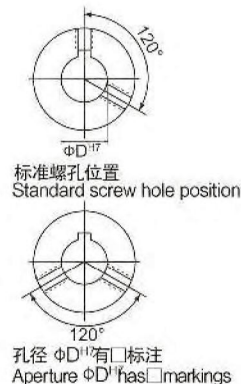

链号	No	06B
链条节距	P	9.525mm
链条内宽	W	5.72 mm
滚子直径	Dr	6.35 mm
齿宽	T	5.3 mm

齿数	S	GD
9	4.4	16
10		20
11		22
12		24
13		28

齿数	外径 Do 06B	节径 P.C.D	凸台直径 BD	总长 BL	a	重量 Kg	孔径 ΦD ^{H7}
9	31	27.85	★21	20	6	0.06	10
10	34	30.82	★24	20	6	0.08	10 12
11	37	33.81	★27	20	6	0.09	10 12 14 15
12	40	36.80	★30	20	6	0.12	10 12 14 15 16 17
13	43	39.80	★32	20	6	0.12	10 12 14 15 16 17 18
14	46.3	42.81	32	20	6	0.12	10 12 14 15 16 17 18 19 20
15	49.3	45.81	35	20	6	0.16	10 12 14 15 16 17 18 19 20
16	52.3	48.82	37	20	6	0.19	10 12 14 15 16 17 18 19 20 22 24 25
17	55.3	51.84	41	20	6	0.22	12 14 15 16 17 18 19 20 22 24 25
18	58.3	54.85	44	20	6	0.25	12 14 15 16 17 18 19 20 22 24 25
19	61.3	57.87	47	20	6	0.28	12 14 15 16 17 18 19 20 22 24 25 28
20	64.3	60.89	50	20	6	0.32	12 14 15 16 17 18 19 20 22 24 25 28 30
21	68	63.91	53	20	6	0.36	12 14 15 16 17 18 19 20 22 24 25 28 30 32
22	71	66.93	56	20	6	0.37	12 14 15 16 17 18 19 20 22 24 25 28 30 32
23	73.5	69.95	60	20	6	0.38	12 14 15 16 17 18 19 20 22 24 25 28 30 32
24	77	72.97	53	22	8	0.43	12 14 15 16 17 18 19 20 22 24 25 28 30 32
25	80	76.00	53	22	8	0.44	15 16 17 18 19 20 22 24 25 28 30 32
26	83	79.02	53	22	8	0.45	15 16 17 18 19 20 22 24 25 28 30 32
27	86	82.05	53	22	8	0.46	15 16 17 18 19 20 22 24 25 28 30 32
28	89	85.07	53	22	8	0.48	15 16 17 18 19 20 22 24 25 28 30 32
30	94.7	91.12	60	22	8	0.51	15 16 17 18 19 20 22 24 25 28 30 32
31	98.3	94.15	65	22	8	0.53	
32	101.3	97.18	65	22	8	0.54	15 16 17 18 19 20 22 24 25 28 30 32
33	104.3	100.20	65	22	8	0.56	
34	107.3	103.23	65	22	8	0.57	15 16 17 18 19 20 22 24 25 28 30 32
35	110.4	106.26	65	22	8	0.59	15 16 17 18 19 20 22 24 25 28 30 32
36	113.4	109.29	70	22	8	0.61	15 16 17 18 19 20 22 24 25 28 30 32
38	119.5	115.34	70	25	10	0.82	20 22 24 25 28 30 32 35 38
40	125.5	121.40	70	25	10	0.85	20 22 24 25 28 30 32 35 38

备注:

1、所有型号规格的链轮均采用优质45钢,可定制不锈钢SUS304。

2、链槽、螺孔规格参照第15页。

3、链轮齿部高频淬火、回火。

4、带★链轮的轮毂外径有沟槽,详见右上方表格。

Note:

1. All models and specifications of sprockets are made of high quality 45 steel, can be customized stainless steel SUS304.

2. Refer to page 15 for specifications of chain groove and screw hole. 3. Sprocket teeth high frequency quenching, tempering.

4. The outer diameter of the hub with ★ sprocket has grooves. See the table on the top right for details.


5. Sprocket inner hole belt □ marked as bolt installation form: 120° below keyway.

6. Finished aperture, keyway and screw hole can be customized according to customer needs. 7. Packing: cartons and wooden cases.



5、链轮内孔带□标注为螺栓安装形式为键槽下方120°。

6、成品孔径、键槽和螺孔可根据客户需求定制。

7、包装方式: 纸箱+木箱。



齿顶与键槽中心偏移量 ± 0.3
Offset between tooth top
and keyway center ± 0.3

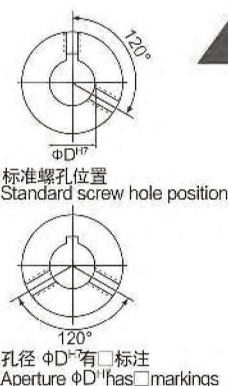

标准螺孔位置
Standard screw hole position

孔径 ΦD^{H7}有□标注
Aperture ΦD^{H7} has □ markings

FBS40B 成品孔链轮

FBS40B Finished Hole Sprocket



链号	No	08A
链条节距	P	12.7 mm
链条内宽	W	7.95 mm
滚子直径	Dr	7.95 mm
齿宽	T	7.2 mm

齿数	S	GD
9		23
10	5.2	27
11		31
12		35

齿数	外径 Do 08A	节径 P.C.D	凸台直径 BD	总长 BL	a	重量 Kg	孔径 ΦD ^{H7}
9	43	37.13	★ 28	22	5	0.11	10 12 14 15
10	47	41.10	★ 32	22	5	0.14	10 12 14 15 16 17 18
11	51	45.08	★ 36	22	5	0.19	10 12 14 15 16 17 18 19 20
12	55	49.07	★ 40	22	5	0.22	10 12 14 15 16 17 18 19 20 22
13	59	53.07	37	22	6	0.23	12 14 15 16 17 18 19 20 22 24 25
14	63	57.07	42	22	6	0.28	12 14 15 16 17 18 19 20 22 24 25 28
15	67	61.08	46	22	6	0.34	12 14 15 16 17 18 19 20 22 24 25 28 30
16	71	65.10	50	22	6	0.40	14 15 16 17 18 19 20 22 24 25 28 30 32
17	76	69.12	54	22	6	0.46	14 15 16 17 18 19 20 22 24 25 28 30 32 35
18	80	73.14	57	22	6	0.51	14 15 16 17 18 19 20 22 24 25 28 30 32 35 40
19	84	77.16	62	22	6	0.59	14 15 16 17 18 19 20 22 24 25 28 30 32 35 38 40
20	88	81.18	67	25	7	0.76	14 15 16 17 18 19 20 22 24 25 28 30 32 35 38 40 42 45
21	92	85.21	71	25	7	0.85	14 15 16 17 18 19 20 22 24 25 28 30 32 35 38 40 42 45
22	96	89.24	75	25	7	0.95	14 15 16 17 18 19 20 22 24 25 28 30 32 35 38 40 42 45
23	100	93.27	77	25	7	1.00	14 15 16 17 18 19 20 22 24 25 28 30 32 35 38 40 42 45
24	104	97.30	63	25	7	0.84	14 15 16 17 18 19 20 22 24 25 28 30 32 35 38 40 42
25	108	101.33	63	25	7	0.88	14 15 16 17 18 19 20 22 24 25 28 30 32 35 38 40 42
26	112	105.36	63	25	7	0.92	14 15 16 17 18 19 20 22 24 25 28 30 32 35 38 40 42
27	116	109.40	63	25	7	0.96	14 15 16 17 18 19 20 22 24 25 28 30 32 35 38 40 42
28	120	113.43	63	25	7	1.00	14 15 16 17 18 19 20 22 24 25 28 30 32 35 38 40 42
29	124	117.46	63	25	7	1.00	25
30	128	121.50	63	25	7	1.10	14 15 16 17 18 19 20 22 24 25 28 30 32 35 38 40 42
32	137	129.57	68	28	10	1.30	20 22 24 25 28 30 32 35 40
34	145	137.64	68	28	10	1.30	20 22 24 25 28 30 32 35 40
35	149	141.68	68	28	10	1.40	20 22 24 25 28 30 32 35 40
36	153	145.72	68	28	10	1.50	20 22 24 25 28 30 32 35 40
37	157	149.75	68	28	10	1.55	35
38	161	153.79	68	28	10	1.60	24 25 28 30 32 35 40
40	169	161.87	68	28	10	1.70	20 25 28 30 32 35 40
42	177	169.95	73	32	10	2.05	30 32 35 40 45
45	189	182.06	73	32	10	2.25	30 32 35 40 45
48	201	194.18	73	32	10	2.45	30 32 35 40 45
50	209	202.26	73	32	10	2.60	25 30 32 35 40 45

备注:


- 1、所有型号规格的链轮均采用优质45钢,可定制不锈钢SUS304。
- 2、链槽、螺孔规格参照第15页。
- 3、链轮齿部高频淬火、回火。
- 4、带★链轮的轮毂外径有沟槽,详见右上方表格。

Note:



1. All models and specifications of sprockets are made of high quality 45 steel, can be customized stainless steel SUS304.
2. Refer to page 15 for specifications of chain groove and screw hole.
3. Sprocket teeth high frequency quenching, tempering.
4. The outer diameter of the hub with ★ sprocket has grooves. See the table on the top right for details.
5. Sprocket inner hole belt □ marked as bolt installation form: 120° below keyway.
6. Finished aperture, keyway and screw hole can be customized according to customer needs.
7. Packing: cartons and wooden cases.

FBS08B 成品孔链轮


FBS08B Finished Hole Sprocket



齿顶与键槽中心偏移量 ± 0.3
Offset between tooth top
and keyway center ± 0.3



标准螺孔位置
Standard screw hole position



孔径 ΦD^{H7} 有□标注
Aperture ΦD^{H7} has □ markings

链号	No	08B
链条节距	P	12.7 mm
链条内宽	W	7.95 mm
滚子直径	Dr	8.51 mm
齿宽	T	7.2 mm

齿数	S	GD
9		21
10	5.2	25
11		30
12		35

齿数	外径 Do	节径 P.C.D	凸台直径 BD	总长 BL	a	重量 Kg	孔径 ΦD ^{H7}																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
	08B																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												

备注:

1、所有型号规格的链轮均采用优质45钢,可定制不锈钢SUS304。

2、链槽、螺孔规格参照第15页。

3、链轮齿部高频淬火、回火。

4、带★链轮的轮毅外径有沟槽,详见右上方表格。

Note:

1. All models and specifications of sprockets are made of high quality 45 steel, can be customized stainless steel SUS304.

2. Refer to page 15 for specifications of chain groove and screw hole. 3. Sprocket teeth high frequency quenching, tempering.

4. The outer diameter of the hub with ★ sprocket has grooves. See the table on the top right for details.

5. Sprocket inner hole belt □ marked as bolt installation form: 120° below keyway.

6. Finished aperture, keyway and screw hole can be customized according to customer needs. 7. Packing: cartons and wooden cases.


5、链轮内孔带□标注为螺栓安装形式为键槽下方120°。

6、成品孔径、键槽和螺孔可根据客户需求定制。


7、包装方式:纸箱+木箱。

FBS50B 成品孔链轮

FBS50B Finished Hole Sprocket



齿顶与键槽中心偏移量 ± 0.3
Offset between tooth top
and keyway center ± 0.3



标准螺孔位置
Standard screw hole position

孔径 ϕD^{H7} 有 $\square$ 标注
Aperture ϕD^{H7} has $\square$ markings



链号	No	10A
链条节距	P	15.875mm
链条内宽	W	9.53 mm
滚子直径	Dr	10.16 mm
齿宽	T	8.7 mm

齿数	S	GD
9		29
10		34
11	6.4	39
12		44
13		49

齿数	外径 Do	节径 P.C.D	凸台直径 BD	总长 BL	a	重量 Kg	孔径 ϕD^{H7}
9	53	46.42	★ 34	25	5	0.20	16 17 18 19
10	58	51.37	★ 40	25	5	0.27	15 16 17 18 19 20 22 24 25
11	64	56.35	★ 45.5	25	5	0.33	15 16 17 18 19 20 22 24 25
12	69	61.34	★ 50	25	5	0.41	15 16 17 18 19 20 22 24 25 28 30 32
13	74	66.34	★ 51	25	5	0.46	14 15 16 17 18 19 20 22 24 25 28 30 32
14	79	71.34	52	25	7	0.52	14 15 16 17 18 19 20 22 24 25 28 30 32 35
15	84	76.35	57	25	7	0.62	14 15 16 17 18 19 20 22 24 25 28 30 32 35 38
16	89	81.37	62	25	7	0.72	14 15 16 17 18 19 20 22 24 25 28 30 32 35 38 40
17	94	86.39	67	25	7	0.83	14 15 16 17 18 19 20 22 24 25 28 30 32 35 38 40 42 45
18	100	91.42	72	28	8	1.00	14 15 16 17 18 19 20 22 24 25 28 30 32 35 38 40 42 45
19	105	96.45	73	28	8	1.10	14 15 16 17 18 19 20 22 24 25 28 30 32 35 38 40 42 45
20	110	101.48	73	28	8	1.20	14 15 16 17 18 19 20 22 24 25 28 30 32 35 38 40 42 45 50
21	115	106.51	73	28	8	1.20	17 18 19 20 22 24 25 28 30 32 35 38 40 42 45
22	120	111.55	73	28	8	1.30	17 18 19 20 22 24 25 28 30 32 35 38 40 42 45
23	125	116.58	73	28	8	1.30	17 18 19 20 22 24 25 28 30 32 35 38 40 42 45
24	130	121.62	73	28	8	1.40	17 18 19 20 22 24 25 28 30 32 35 38 40 42 45
25	135	126.66	73	28	8	1.50	17 18 19 20 22 24 25 28 30 32 35 38 40 42 45
26	140	131.70	73	28	8	1.50	24 25 28 30 32 35 38 40 45
27	145	136.74	73	28	8	1.50	24 25 28 30 32 35 38 40 45
28	150	141.79	73	28	8	1.60	24 25 28 30 32 35 38 40 42 45
29	155	146.83	73	28	8	1.70	24 30
30	161	151.87	73	28	8	1.80	22 25 28 30 32 35 38 40 45
32	171	161.96	73	28	8	1.90	25 28 30 32 35 38 40 45
33	176	167.01	73	28	8	2.00	35
34	181	172.05	73	28	8	2.10	25 28 30 32 35 38 40 45
35	186	177.10	73	28	8	2.20	25 28 30 32 35 38 40 45
40	211	202.33	83	35	10	3.25	32 35 40 45 50
42	221	212.43	83	35	10	3.50	32 35 40 45 50
45	237	227.58	83	35	10	3.85	32 35 40 45 50
48	252	242.73	83	35	10	4.20	32 35 40 45 50
50	262	252.83	83	35	10	4.50	30 32 35 40 45 50

备注:


- 1、所有型号规格的链轮均采用优质45钢，可定制不锈钢SUS304。
- 2、链槽、螺孔规格参照第15页。
- 3、链轮齿部高频淬火、回火。
- 4、带★链轮的轮毂外径有沟槽，详见右上方表格。

Note:



1. All models and specifications of sprockets are made of high quality 45 steel, can be customized stainless steel SUS304.
2. Refer to page 15 for specifications of chain groove and screw hole.
3. Fprocket teeth high frequency quenching, tempering.
4. The outer diameter of the hub with ★ sprocket has grooves. See the table on the top right for details.
5. Sprocket inner hole belt $\square$ marked as bolt installation form: 120° below keyway.
6. Finished aperture, keyway and screw hole can be customized according to customer needs.
7. Packing: cartons and wooden cases.

FBS60B 成品孔链轮


FBS60B Finished Hole Sprocket



齿顶与键槽中心偏移量 ± 0.3
Offset between tooth top
and keyway center ± 0.3



标准螺孔位置
Standard screw hole position



孔径 ΦD^{H7} 有 $\square$ 标注
Aperture ΦD^{H7} has $\square$ markings

链号	No	12A
链条节距	P	19.05 mm
链条内宽	W	12.7 mm
滚子直径	Dr	11.91 mm
齿宽	T	11.7 mm

齿数	S	GD
9		32
10	8.0	37
11		45

齿数	外径 Do	节径 P.C.D	凸台直径 BD	总长 BL	a	重量 Kg	孔径 ΦD^{H7}															
9	64	55.70	★43	32	6	0.40	19	20	22	24												
10	70	61.65	★49	32	6	0.49	19	20	22	24	25	28	30									
11	76	67.62	★51	32	6	0.60	19	20	22	24	25	28	30	32								
12	83	73.60	51	32	8	0.69	19	20	22	24	25	28	30	32	35							
13	89	79.60	57	32	8	0.81	19	20	22	24	25	28	30	32	35	38	40					
14	95	85.61	62	32	8	0.96	19	20	22	24	25	28	30	32	35	38	40					
15	101	91.62	68	32	8	1.10	18	19	20	22	24	25	28	30	32	35	38	40	42	45		
16	107	97.65	73	32	8	1.30	19	20	22	24	25	28	30	32	35	38	40	42	45	48	50	
17	113	103.67	73	32	8	1.40	19	20	22	24	25	28	30	32	35	38	40	42	45	48	50	
18	119	109.71	83	40	12	2.00	19	20	22	24	25	28	30	32	35	38	40	42	45	48	50	55
19	126	115.74	83	40	12	2.10	19	20	22	24	25	28	30	32	35	38	40	42	45	48		
20	132	121.78	83	40	12	2.20	19	20	22	24	25	28	30	32	35	38	40	42	45	48	50	55
21	138	127.82	83	40	12	2.30	20	22	24	25	28	30	32	35	38	40	42	45	48	50	55	
22	144	133.86	83	40	12	2.50	20	22	24	25	28	30	32	35	38	40	42	45	48	50	55	
23	150	139.90	83	40	12	2.50	20	22	24	25	28	30	32	35	38	40	42	45	48	50	55	
24	156	145.95	83	40	12	2.60	20	22	24	25	28	30	32	35	38	40	42	45	48	50	55	
25	162	151.99	83	40	12	2.70	20	22	24	25	28	30	32	35	38	40	42	45	48	50	55	
26	168	158.04	83	40	12	2.90	20	22	24	25	28	30	32	35	38	40	42	45	48	50	55	
27	174	164.09	83	40	12	3.00	22	24	25	28	30	32	35	38	40	42	45	48	50			
28	180	170.14	83	40	12	3.10	22	24	25	28	30	32	35	38	40	42	45	48	50			
30	193	182.25	83	40	12	3.40	22	24	25	28	30	32	35	38	40	42	45	48	50	55		
31	199	188.30	83	40	12	3.64	40															
32	205	194.35	83	40	12	3.80	30	32	35	40												
35	223	212.52	83	40	12	4.15	30	32	35	40												
38	241	230.69	83	40	12	4.90	32	35	40													
40	253	242.80	83	40	12	5.30	32	35	40													
45	284	273.09	93	45	12	7.10	32	35	40													

备注:

1、所有型号规格的链轮均采用优质45钢,可定制不锈钢SUS304。

2、链槽、螺孔规格参照第15页。

3、链轮齿部高频淬火、回火。

4、带★链轮的轮毂外径有沟槽,详见右上方表格。

Note:

1. All models and specifications of sprockets are made of high quality 45 steel, can be customized stainless steel SUS304.

2. Refer to page 15 for specifications of chain groove and screw hole. 3. Sprocket teeth high frequency quenching, tempering.

4. The outer diameter of the hub with ★ sprocket has grooves. See the table on the top right for details.

5. Sprocket inner hole belt $\square$ marked as bolt installation form: 120° below keyway.

6. Finished aperture, keyway and screw hole can be customized according to customer needs. 7. Packing: cartons and wooden cases.


5、链轮内孔带 $\square$ 标注为螺栓安装形式为键槽下方120°。

6、成品孔径、键槽和螺孔可根据客户需求定制。



7、包装方式: 纸箱+木箱。

FBS80B 成品孔链轮


FBS80B Finished Hole Sprocket



齿顶与键槽中心偏移量 ± 0.3
Offset between tooth top and keyway center ± 0.3



标准螺孔位置
Standard screw hole position



孔径 ΦD^{H7} 有 $\square$ 标注
Aperture ΦD^{H7} has $\square$ markings



链号	No	16A
链条节距	P	25.4 mm
链条内宽	W	15.88 mm
滚子直径	Dr	15.88 mm
齿宽	T	14.6 mm

齿数	S	GD
9	10.4	44

齿数	外径 Do	节径 P.C.D	凸台直径 BD	总长 BL	a	重量 Kg	孔径 ΦD^{H7}
9	85	74.27	★ 58	40	7	0.87	25 28 30 32 35
10	93	82.19	52	40	12	1.02	25 28 30 32
11	102	90.16	60	40	12	1.25	25 28 30 32 35 38
12	110	98.14	67	40	12	1.60	25 28 30 32 35 38 40 42 45
13	118	106.14	77	40	12	1.90	25 28 30 32 35 38 40 42 45 48 50
14	127	114.15	77	40	12	2.15	25 28 30 32 35 38 40 42 45 48 50
15	135	122.17	93	40	12	2.30	25 28 30 32 35 38 40 42 45 48 50 55 60
16	143	130.20	93	40	12	2.50	24 25 28 30 32 35 38 40 42 45 48 50 55 60
17	151	138.23	93	40	12	2.95	25 28 30 32 35 38 40 42 45 48 50 55 60
18	159	146.27	93	40	12	3.15	25 28 30 32 35 38 40 42 45 48 50 55 60
19	167	154.32	93	40	12	3.40	25 28 30 32 35 38 40 42 45 48 50 55 60
20	176	162.37	93	40	12	3.60	25 28 30 32 35 38 40 42 45 48 50 55 60
21	184	170.42	93	40	12	3.85	25 28 30 32 35 38 40 42 45 48 50 55 60
22	192	178.48	107	45	12	5.00	35 40
23	200	186.54	107	45	12	5.23	35 40
24	208	194.60	107	45	12	5.50	35 40
25	216	202.66	107	45	12	5.80	35 40
26	224	210.72	107	45	12	6.10	35 40
28	241	226.86	107	45	12	6.75	35 40
30	257	243.00	107	45	12	7.40	35 40
36	306	291.43	117	50	12	10.60	60

备注:

1、所有型号规格的链轮均采用优质45钢,可定制不锈钢SUS304。

2、链槽、螺孔规格参照第15页。

3、链轮齿部高频淬火、回火。

4、带★链轮的轮毂外径有沟槽,详见右上方表格。

Note:

1. All models and specifications of sprockets are made of high quality 45 steel, can be customized stainless steel SUS304.

2. Refer to page 15 for specifications of chain groove and screw hole. 3. Fprocket teeth high frequency quenching, tempering.

4. The outer diameter of the hub with ★ sprocket has grooves. See the table on the top right for details.

5. Sprocket inner hole belt $\square$ marked as bolt installation form: 120° below keyway.

6. Finished aperture, keyway and screw hole can be customized according to customer needs. 7. Packing: cartons and wooden cases.


5、链轮内孔带 $\square$ 标注为螺栓安装形式为键槽下方120°。

6、成品孔径、键槽和螺孔可根据客户需求定制。



7、包装方式:纸箱+木箱。

FBS100B 成品孔链轮

FBS100B Finished Hole Sprocket



齿顶与键槽中心偏移量 ± 0.3
Offset between tooth top
and keyway center ± 0.3



标准螺孔位置
Standard screw hole position



孔径 ΦD^{H7} 有 $\square$ 标注
Aperture ΦD^{H7} has $\square$ markings

链号	No	20A
链条节距	P	31.75 mm
链条内宽	W	19.05 mm
滚子直径	Dr	19.05 mm
齿宽	T	17.6 mm

齿数	外径 Do	节径 P.C.D	凸台直径 BD	总长 BL	a	重量 Kg	孔径 ΦD^{H7}
10	117	102.75	65	50	16	1.90	25 28 30 32 35 38 40 42
11	127	112.70	75	50	16	2.30	25 28 30 32 35 38 40 42 45 48 50
12	138	122.67	86	50	16	2.90	25 28 30 32 35 38 40 42 45 48 50 55
13	148	132.67	94	50	16	3.10	25 28 30 32 35 38 40 42 45 48 50 55 60
14	158	142.68	98	50	16	3.60	25 28 30 32 35 38 40 42 45 48 50 55 60
15	168	152.71	98	50	16	4.20	32 35 38 40 42 45 48 50 55 60
16	179	162.74	98	50	16	4.60	38 45 50 55 60
17	189	172.79	107	50	16	5.30	38 45 48 50 55 60 70
18	199	182.84	107	50	16	5.70	38 45 50 55 60 70
19	209	192.90	107	50	16	6.10	38 45 50 60
20	220	202.96	107	50	16	6.50	38 45 50 55 60
21	230	213.03	107	50	16	7.00	45 50 60
22	240	223.10	117	56	16	7.90	60
24	260	243.25	117	56	16	8.80	60 70

备注:

- 1、所有型号规格的链轮均采用优质45钢，可定制不锈钢SUS304。
- 2、链槽、螺孔规格参照第15页。
- 3、链轮齿部高频淬火、回火。
- 4、带★链轮的轮毂外径有沟槽，详见右上方表格。

Note:


1. All models and specifications of sprockets are made of high quality 45 steel, can be customized stainless steel SUS304.
2. Refer to page 15 for specifications of chain groove and screw hole.
3. Fprocket teeth high frequency quenching, tempering.
4. The outer diameter of the hub with ★ sprocket has grooves. See the table on the top right for details.
5. Sprocket inner hole belt $\square$ marked as bolt installation form: 120° below keyway.
6. Finished aperture, keyway and screw hole can be customized according to customer needs.
7. Packing: cartons and wooden cases.

- 5、链轮内孔带 $\square$ 标注为螺栓安装形式为键槽下方120°。
- 6、成品孔径、键槽和螺孔可根据客户需求定制。
- 7、包装方式：纸箱+木箱。

FBS120B 成品孔链轮

FBS120B Finished Hole Sprocket

齿顶与键槽中心偏移量 ± 0.3
Offset between tooth top
and keyway center ± 0.3

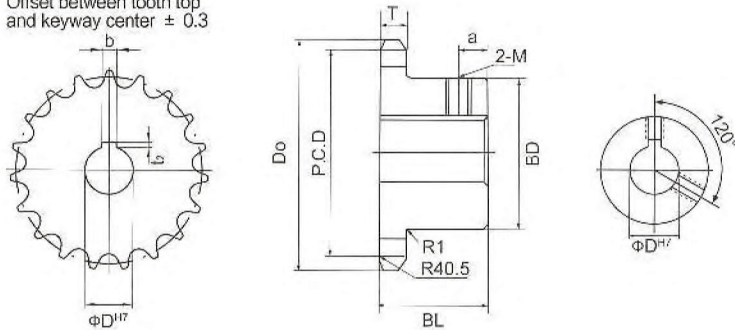

链号	No	24A
链条节距	P	38.1 mm
链条内宽	W	25.4 mm
滚子直径	Dr	22.23 mm
齿宽	T	23.5 mm

齿数	外径 Do	节径 P.C.D	凸台直径 BD	总长 BL	a	重量 Kg	孔径 ΦD^{H7}
13	177	159.20	98	56	16	5.30	45 48 50 55 60
14	190	171.22	107	56	16	6.30	45 48 50 55 60 65 70
15	202	183.25	117	63	16	7.80	45 48 50 55 60 70
16	214	195.29	117	63	16	8.40	50 60
18	239	219.41	117	63	16	9.90	50 60
19	251	231.48	117	63	16	10.70	60
20	263	243.55	127	63	16	12.10	50 60
21	276	255.63	127	63	16	13.00	50 60

备注:

- 1、所有型号规格的链轮均采用优质45钢，可定制不锈钢SUS304。
- 2、链槽、螺孔规格参照第15页。
- 3、链轮齿部高频淬火、回火。
- 4、带★链轮的轮毂外径有沟槽，详见右上方表格。


Note:

1. All models and specifications of sprockets are made of high quality 45 steel, can be customized stainless steel SUS304.
2. Refer to page 15 for specifications of chain groove and screw hole.
3. Sprocket teeth high frequency quenching, tempering.
4. The outer diameter of the hub with ★ sprocket has grooves. See the table on the top right for details.
5. Sprocket inner hole belt □ marked as bolt installation form: 120° below keyway.
6. Finished aperture, keyway and screw hole can be customized according to customer needs.
7. Packing: cartons and wooden cases.

- 5、链轮内孔带□标注为螺栓安装形式为键槽下方120°。
- 6、成品孔径、键槽和螺孔可根据客户需求定制。
- 7、包装方式：纸箱+木箱。

S15B 链轮

S15B Sprocket



链号	No	03C
链条节距	P	4.7625mm
链条内宽	W	2.38 mm
滚子直径	Dr	2.48 mm
齿宽	T	2.0 mm

齿数	外径 Do	节径 P.C.D	孔径 d			凸台直径 BD	全长 BL	形状	重量 g
			底孔	最小	最大				
11	19.0	16.90	4	5	7	11	10	切削规格	9
12	20.5	18.40	4	5	8	12	10		10
13	22.0	19.90	4	5	9	14	10		14
14	23.5	21.40	6	7	10	15	12		17
15	25.0	22.91	6	7	12	17	12		22
16	26.5	24.41	8	9	12	18	12		23
17	28.0	25.92	8	9	14	20	14		32
18	29.5	27.43	8	9	14	22	14		40
19	31.0	28.93	8	9	15	23	14		44
20	32.5	30.44	8	9	15	24	14		49
21	34.0	31.95	8	9	17	26	14		57
22	35.5	33.46	8	9	17	27	14		62
23	37.5	34.98	8	9	17	28	14		68
24	39.0	36.49	8	9	20	30	16		88
25	40.5	38.00	8	9	20	32	16		100
26	42.0	39.51	10	11	22	33	16		104
27	43.5	41.02	10	11	25	35	16		117
28	45.0	42.54	10	11	25	37	16		131
29	46.5	44.05	10	11	25	38	16		139
30	48.0	45.56	10	11	25	39	16		147
31	49.5	47.08	10	11	25	40	18		175
32	51.0	48.59	10	11	25	40	18		176
33	52.5	50.10	10	11	25	40	18		178
34	54.0	51.62	10	11	25	40	18		180
35	55.5	53.13	10	11	25	40	18		182

备注:

1、所有型号规格的链轮均采用优质45钢,可定制不锈钢SUS304。

2、链轮齿部高频淬火、回火。

3、带★链轮的轮轂外径有沟槽,详见右上方表格。

4、带●链轮为焊接型。

5、包装方式:纸箱+木箱。

Note:


1. All models and specifications of sprockets are made of high quality 45 steel, can be customized stainless steel SUS304.

2. Fprocket teeth high frequency quenching, tempering.

3. The outer diameter of the hub with ★ sprocket has grooves. See the table on the top right for details.

4. Sprocket with ● for welding type. 5. Packing: cartons and wooden cases.

S25 链轮 S25 Sprocket



链号	No	04C
链条节距	P	6.35 mm
链条内宽	W	3.18 mm
滚子直径	Dr	3.30 mm
齿宽	T	2.8 mm

齿数	外径 Do	节径 P.C.D	B 型单排					重量 Kg
			凸台 Hub		孔径 d			
			直径 BD	总长 BL	库存孔径 d	最小	最大	
10	23	20.55	14	15	6	7	8	0.03
11	25	22.54	15	15	7	8	8	0.03
12	28	24.53	15	15	7	8	9	0.03
13	30	26.53	18	15	7	8	10	0.05
14	32	28.54	20	15	7	8	10	0.05
15	34	30.54	20	15	7	8	10	0.05
16	36	32.55	25	15	9	10	12	0.06
17	38	34.56	25	15	9	10	12	0.07
18	40	36.57	25	15	9	10	12	0.07
19	42	38.58	28	15	9	10	16	0.08
20	44	40.59	28	15	9	10	16	0.08
21	46	42.61	28	15	9	10	16	0.09
22	48	44.62	30	15	9	10	16	0.10
23	50	46.63	30	15	9	10	16	0.11
24	52	48.65	30	15	9	10	16	0.12
25	54	50.66	35	15	9	10	20	0.14
26	56	52.68	35	15	9	10	20	0.14
27	58	54.70	35	15	9	10	20	0.15
28	60	56.71	35	15	9	10	20	0.15
29	62	58.73	35	15	9	10	20	0.16
30	64	60.75	35	15	9	10	20	0.16
31	66	62.77	40	20	10	11	22	0.20
32	68	64.78	40	20	10	11	22	0.20
33	70	66.80	40	20	10	11	22	0.20
34	72	68.82	40	20	10	11	22	0.21
35	74	70.84	40	20	10	11	22	0.21
36	76	72.86	40	20	10	11	22	0.22
37	78	74.88	40	20	10	11	22	0.26
38	80	76.90	40	20	10	11	22	0.26
39	82	78.91	40	20	10	11	22	0.27
40	84	80.93	40	20	10	11	22	0.27
41	87	82.95	50	20	11	12	30	0.32
42	89	84.97	50	20	11	12	30	0.32
43	91	86.99	50	20	11	12	30	0.40
44	93	89.01	50	20	11	12	30	0.41
45	95	91.03	50	20	11	12	30	0.41
48	101	97.09	50	20	11	12	30	0.43
50	105	101.13	50	20	11	12	30	0.46
54	113	109.21	50	20	11	12	30	0.47
60	125	121.33	50	20	11	12	30	0.52
65	135	131.43	50	30	12	13	30	0.72
70	145	141.54	50	30	12	13	30	0.77
75	155	151.64	50	30	12	13	30	0.82
80	165	161.74	50	30	12	13	30	0.88

备注:

- 1、所有型号规格的链轮均采用优质45钢，可定制不锈钢SUS304。
- 2、链轮齿部高频淬火、回火。
- 3、带★链轮的轮毂外径有沟槽，详见右上方表格。
- 4、带●链轮为焊接型。
- 5、包装方式：纸箱+木箱。

Note:


1. All models and specifications of sprockets are made of high quality 45 steel, can be customized stainless steel SUS304.
2. Sprocket teeth high frequency quenching, tempering.
3. The outer diameter of the hub with ★ sprocket has grooves. See the table on the top right for details.
4. Sprocket with ● for welding type.
5. Packing: cartons and wooden cases.

S35 链轮 S35 Sprocket




链号	No	06C
链条节距	P	9.525 mm
链条内宽	W	4.78 mm
滚子直径	Dr	5.08 mm
齿宽	T	4.3 mm


TYPE A



TYPE B



TYPE BW



齿数	落链槽尺寸	
	宽度 S	直径 GD
9	4.4	17
10		20
11		23
12		26
13		29

齿数	外径 Do	节径 P.C.D	B 型单排						A 型号	
			凸台 Hub		孔径 d			重量 Kg	库存孔径 d	重量 Kg
			直径 BD	总长 BL	库存孔径 d	最小	最大			
9	32	27.85	★ 21.5	20	8	9	11	0.06	8	
10	35	30.82	★ 24.5	20	8	9	12	0.08	8	0.02
11	38	33.81	★ 27	20	8	9	14	0.09	8	0.03
12	41	36.80	★ 30.5	20	9	10	16	0.12	9	0.03
13	44	39.80	★ 32	20	9	10	18	0.12	9	0.04
14	47	42.81	32	20	9	10	18	0.12	9	0.04
15	51	45.81	35	20	9	10	20	0.16	9	0.05
16	54	48.82	37	20	9	10	20	0.19	9	0.05
17	57	51.84	41	20	11	12	25	0.22	11	0.07
18	60	54.85	44	20	11	12	25	0.25	11	0.07
19	63	57.87	47	20	11	12	28	0.28	11	0.09
20	66	60.89	50	20	11	12	30	0.32	11	0.09
21	69	63.91	53	20	11	12	32	0.36	11	0.11
22	72	66.93	56	20	11	12	35	0.37	11	0.11
23	75	69.95	60	20	11	12	38	0.38	11	0.11
24	78	72.97	53	22	11	12	32	0.43	11	0.14
25	81	76.00	53	22	11	12	32	0.44	11	0.16
26	84	79.02	53	22	11	12	32	0.45	11	0.16
27	87	82.05	53	22	11	12	32	0.46	11	0.17
28	90	85.07	53	22	11	12	32	0.48	11	0.18
29	93	88.10	53	22	11	12	32	0.49	11	
30	96	91.12	53	22	11	12	32	0.51	11	0.23
31	99	94.15	53	22	11	12	32	0.53	11	
32	102	97.18	53	22	11	12	32	0.54	11	0.27
33	105	100.20	53	22	11	12	32	0.56	11	0.28
34	109	103.23	53	22	11	12	32	0.57	11	0.29
35	112	106.26	53	22	11	12	32	0.59	11	0.30
36	115	109.29	53	22	12	13	32	0.61	12	0.32
37	118	112.31	63	25	12	13	42	0.80	12	
38	121	115.34	63	25	12	13	42	0.82	12	0.41
39	124	118.37	63	25	12	13	42	0.84	12	
40	127	121.40	63	25	12	13	42	0.85	12	0.43
41	130	124.43	63	25	14	15	42	0.91	12	
42	133	127.46	63	25	14	15	42	0.93	14	0.43
43	136	130.49	63	25	14	15	42	0.95	14	
44	139	133.52	63	25	14	15	42	0.97	14	
45	142	136.55	63	25	14	15	42	1.00	14	0.49
46	145	139.58	63	25	14	15	42	1.01	14	0.51
47	148	142.61	63	25	14	15	42	1.03	14	
48	151	145.64	63	25	14	15	42	1.05	14	0.55
50	157	151.70	63	25	14	15	42	1.07	14	0.60
53	166	160.78	63	25	14	15	42	1.09	14	
54	169	163.81	63	25	14	15	42	1.10	14	0.70
55	172	166.85	63	25	14	15	42	1.25	14	0.71
60	187	182.00	63	25	14	15	42	1.30	14	0.80
64	200	194.12	63	25	16	17	42	1.46	16	
65	203	197.15	68	25	16	17	45	1.67	16	1.02
70	218	212.30	68	25	16	17	45	1.80	16	1.18
75	233	227.46	68	25	16	17	45	1.90	16	
80	248	242.61	68	25	16	17	45	2.40	16	1.50


备注:

- 1、所有型号规格的链轮均采用优质45钢，可定制不锈钢SUS304。
- 2、链轮齿部高频淬火、回火。
- 3、带★链轮的轮毂外径有沟槽，详见右上方表格。
- 4、带●链轮为焊接型。
- 5、包装方式：纸箱+木箱。

Note:

1. All models and specifications of sprockets are made of high quality 45 steel, can be customized stainless steel SUS304.
2. Sprocket teeth high frequency quenching, tempering.
3. The outer diameter of the hub with ★ sprocket has grooves. See the table on the top right for details.
4. Sprocket with ● for welding type.
5. Packing: cartons and wooden cases.

TYPE A TYPE B TYPE BW

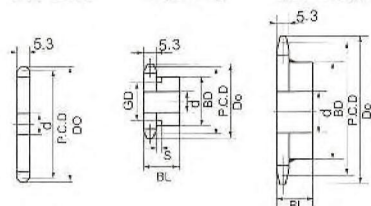

S06 链轮

S06 Sprocket



链号	No	06B
链条节距	P	9.525 mm
链条内宽	W	5.72 mm
滚子直径	Dr	6.35 mm
齿宽	T	5.3 mm

齿数	落链槽尺寸	
	宽度 S	直径 GD
9	4.4	17
10		20
11		22
12		24
13		28

齿数	外径 Do	节径 P.C.D	B 型单排					A 型号	
			凸台 Hub		孔径 d			重量 Kg	库存孔径 d
			直径 BD	总长 BL	库存孔径 d	最小	最大		
9	31	27.85	★ 21	20	8	9	11	0.06	8
10	34	30.82	★ 24	20	8	9	12	0.08	8
11	37	33.81	★ 27	20	8	9	14	0.09	8
12	40	36.80	★ 30	20	9	10	16	0.12	9
13	43	39.80	★ 32	20	9	10	18	0.12	9
14	46.3	42.81	32	20	9	10	18	0.12	9
15	49.3	45.81	35	20	9	10	20	0.16	9
16	52.3	48.82	37	20	9	10	20	0.19	9
17	55.3	51.84	41	20	11	12	25	0.22	11
18	58.3	54.85	44	20	11	12	25	0.25	11
19	61.3	57.87	47	20	11	12	28	0.28	11
20	64.3	60.89	50	20	11	12	30	0.32	11
21	68	63.91	53	20	11	12	32	0.36	11
22	71	66.93	56	20	11	12	35	0.37	11
23	73.5	69.95	60	20	11	12	38	0.38	11
24	77	72.97	53	22	11	12	32	0.43	11
25	80	76.00	53	22	11	12	32	0.44	11
26	83	79.02	53	22	11	12	32	0.45	11
27	86	82.05	53	22	11	12	32	0.46	11
28	89	85.07	53	22	11	12	32	0.48	11
29	92	88.10	53	22	11	12	32	0.49	11
30	94.7	91.12	60	22	11	12	32	0.51	11
31	98.3	94.15	65	22	11	12	32	0.53	11
32	101.3	97.18	65	22	11	12	32	0.54	11
33	104.3	100.20	65	22	11	12	32	0.56	11
34	107.3	103.23	65	22	11	12	32	0.57	11
35	110.4	106.26	65	22	11	12	32	0.59	11
36	113.4	109.29	70	22	12	13	32	0.61	12
37	116.4	112.31	70	25	12	13	42	0.80	12
38	119.5	115.34	70	25	12	13	42	0.82	12
39	122.5	118.37	70	25	12	13	42	0.84	12
40	125.5	121.40	70	25	12	13	42	0.85	12
41	128.5	124.43	63	25	14	15	42	0.91	12
42	131.6	127.46	63	25	14	15	42	0.93	14
43	134.6	130.49	63	25	14	15	42	0.95	14
44	137.6	133.52	63	25	14	15	42	0.97	14
45	140.7	136.55	63	25	14	15	42	1.00	14
46	143.7	139.58	63	25	14	15	42	1.01	14
47	146.7	142.61	63	25	14	15	42	1.03	14
48	149.7	145.64	63	25	14	15	42	1.05	14
50	155.7	151.70	63	25	14	15	42	1.07	14
53	164.8	160.78	63	25	14	15	42	1.09	14
54	167.8	163.81	63	25	14	15	42	1.10	14
55	170.8	166.85	63	25	14	15	42	1.25	14
60	186	182.00	63	25	14	15	42	1.30	14
64	198.2	194.12	63	25	16	17	42	1.46	16
65	201.6	197.15	68	25	16	17	45	1.67	16
70	216.7	212.30	68	25	16	17	45	1.80	16
75	231.9	227.46	68	25	16	17	45	1.90	16
80	247.1	242.61	68	25	16	17	45	2.40	16

备注:

1、所有型号规格的链轮均采用优质45钢,可定制不锈钢SUS304。

2、链轮齿部高频淬火、回火。

3、带★链轮的轮毂外径有沟槽,详见右上方表格。

4、带●链轮为焊接型。

5、包装方式:纸箱+木箱。

Note:

1. All models and specifications of sprockets are made of high quality 45 steel, can be customized stainless steel SUS304.

2. Sprocket teeth high frequency quenching, tempering.

3. The outer diameter of the hub with ★ sprocket has grooves. See the table on the top right for details.


4. Sprocket with ● for welding type. 5. Packing: cartons and wooden cases.

S40 链轮


S40 Sprocket




TYPE A




TYPE B




TYPE BW



TYPE B double



TYPE BW double



C=14.4

链号	No	08A
链条节距	P	12.7 mm
链条内宽	W	7.95 mm
滚子直径	Dr	7.95 mm
齿宽	T	7.2 mm

齿数	落链槽尺寸	
	宽度 S	直径 GD
8	5.2	18
9		23
10		27
11		31
12		35

齿数	外径 D0	节径 P.C.D	B 型单排						A 型		B 型双排					
			凸台 Hub		孔径 d			重量 Kg	库存孔径 d	重量 Kg	凸台 Hub		孔径 d			重量 Kg
			直径 BD	总长 BL	库存孔径 d	最小	最大				直径 BD	总长 BL	库存孔径 d	最小	最大	
8	39	33.13	★ 24	22	9	10	14	0.10								
9	43	37.13	★ 28	22	9	10	16	0.11								
10	47	41.10	★ 32	22	9	10	18	0.14								
11	51	45.08	★ 36	22	10	11	20	0.19	9	0.05	28	35	10	11	16	0.28
12	55	49.07	★ 40	22	10	11	22	0.22	10	0.09	30	35	10	11	16	0.30
13	59	53.07	37	22	12	13	20	0.23	10	0.10	35	35	10	11	20	0.34
14	63	57.07	42	22	12	13	25	0.28	12	0.12	39	35	13	14	22	0.40
15	67	61.08	46	22	12	13	28	0.34	12	0.14	43	35	13	14	25	0.47
16	71	65.10	50	22	13	14	32	0.40	12	0.16	47	35	13	14	28	0.55
17	76	69.12	54	22	13	14	32	0.46	13	0.18	50	35	13	14	30	0.65
18	80	73.14	57	22	13	14	35	0.51	13	0.20	54	35	13	14	32	0.75
19	84	77.16	62	22	14	15	40	0.59	13	0.23	59	35	13	14	38	0.85
20	88	81.18	67	25	14	15	45	0.76	14	0.26	63	35	13	14	42	0.98
21	92	85.21	71	25	14	15	48	0.85	14	0.29	67	40	13	14	45	1.30
22	96	89.24	75	25	14	15	51	0.95	14	0.30	68	40	13	14	45	1.30
23	100	93.27	77	25	14	15	51	1.00	14	0.35	72	40	13	14	48	1.50
24	104	97.30	63	25	14	15	42	0.84	14	0.38	76	40	13	14	51	1.60
25	108	101.33	63	25	14	15	42	0.88	14	0.40	80	40	13	14	55	1.80
26	112	105.36	63	25	14	15	42	0.92	14	0.45	84	40	13	14	57	2.00
27	116	109.40	63	25	14	15	42	0.96	14	0.49	88	40	13	14	60	2.20
28	120	113.43	63	25	14	15	42	1.00	14	0.50	92	40	16	17	60	2.30
29	124	117.46	63	25	14	15	42	1.00	14	0.56	96	40	16	17	66	2.50
30	128	121.50	63	25	14	15	42	1.10	14	0.60	96	40	16	17	66	2.65
31	133	125.53	68	28	14	15	45	1.20	14	0.63	100	40	16	17	66	2.80
32	137	129.57	68	28	14	15	45	1.30	14	0.65	100	50	16	17	66	2.95
33	141	133.61	68	28	14	15	45	1.30	14	0.70	100	50	16	17	66	3.05
34	145	137.64	68	28	14	15	45	1.30	14	0.75	100	50	16	17	66	3.06
35	149	141.68	68	28	14	15	45	1.40	14	0.80	100	50	16	17	66	3.08
36	153	145.72	68	28	16	17	45	1.50	14	0.85	100	50	16	17	66	3.10
37	157	149.75	68	28	16	17	45	1.55	16	0.90	100	50	16	17	66	3.30
38	161	153.79	68	28	16	17	45	1.60	16	0.99	100	50	16	17	66	3.40
39	165	157.83	68	28	16	17	45	1.65	16	1.00	100	50	16	17	66	3.50
40	169	161.87	68	28	16	17	45	1.70	16	1.15						
41	173	165.91	73	32	16	17	48	2.00	16	1.20	100	50	16	17	66	3.60
42	177	169.95	73	32	16	17	48	2.05	16	1.25	93	50	16	17	63	3.80
43	181	173.98	73	32	16	17	48	2.10	16	1.30	93	50	16	17	63	4.00
44	185	178.02	73	32	16	17	48	2.17	16	1.35						
45	189	182.06	73	32	16	17	48	2.25	16	1.40	93	50	18	19	63	4.60
46	193	186.10	73	32	16	17	48	2.30	16	1.49						
47	197	190.14	73	32	16	17	48	2.37	16	1.58						
48	201	194.18	73	32	16	17	48	2.45	16	1.63	93	50	18	19	63	5.00
49	205	198.22	73	32	16	17	48	2.51	16	1.73						
50	209	202.26	73	32	16	17	48	2.60	16	1.80	93	50	18	19	63	5.50
51	214	206.30	73	32	16	17	48	2.65	16	1.88						
52	218	210.34	73	32	16	17	48	2.72	16	1.93						
53	222	214.38	73	32	16	17	48	2.80	16	1.98						
54	226	218.42	73	32	16	17	48	2.90	16	2.00	93	50	18	19	63	5.80
60	250	242.66	73	32	16	17	48	3.40	16	2.60	93	50	18	19	63	6.70
65	270	262.87	83	32	16	17	55	4.10	16	3.00	93	50	20	21	63	10.20
70	290	283.07	83	32	16	17	55	4.57	16	3.50	93	50	20	21	63	11.50
72	299	291.15	83	32	20	21	55	4.80	20	3.70						
75	311	303.28	83	32	20	21	55	5.10	20	4.00						
●80	331	323.49	88	35	20	21	60	5.90	20	4.60						
●85	351	343.69	88	35	20	21	60	6.50	20	5.20						
●90	371	363.90	88	35	20	21	60	7.15	20	5.80						


备注:

- 1、所有型号规格的链轮均采用优质45钢，可定制不锈钢SUS304。
- 2、链轮齿部高频淬火、回火。
- 3、带★链轮的轮轡外径有沟槽，详见右上方表格。
- 4、带●链轮为焊接型。
- 5、包装方式：纸箱+木箱。


Note:

1. All models and specifications of sprockets are made of high quality 45 steel, can be customized stainless steel SUS304.
2. Fprocket teeth high frequency quenching, tempering.
3. The outer diameter of the hub with ★ sprocket has grooves. See the table on the top right for details.
4. Sprocket with ● for welding type. 5. Packing: cartons and wooden cases.


TYPE A




TYPE B




TYPE BW



TYPE B double



TYPE BW double



C=14.4

S08 链轮

S08 Sprocket



链号	No	08B
链条节距	P	12.7 mm
链条内宽	W	7.95 mm
滚子直径	Dr	8.51 mm
齿宽	T	7.2 mm

齿数	落链槽尺寸	
	宽度 S	直径 GD
8	5.2	18
9		21
10		25
11		30
12		35

齿数	外径 D0		节径 P.C.D	B 型单排					A 型		B 型双排				
				凸台 Hub		孔径 d		重量 Kg	库存孔径 d	重量 Kg	凸台 Hub		孔径 d		重量 Kg
	08B			直径 BD	总长 BL	库存孔径 d	最小 最大				直径 BD	总长 BL	库存孔径 d	最小 最大	
8	37.2	33.19	★ 24	22	9	10	14	0.10							
9	41	37.13	★ 28	22	9	10	16	0.11							
10	45.2	41.10	★ 32	22	9	10	18	0.14	9	0.05	28	35	10	11	0.28
11	48.7	45.08	★ 36	22	10	11	20	0.19	10	0.09	30	35	10	11	0.30
12	53	49.07	★ 40	22	10	11	22	0.22	10	0.10	35	35	10	11	0.34
13	57.4	53.07	★ 37	22	12	13	20	0.23	12	0.12	39	35	13	14	0.40
14	61.8	57.07	★ 42	22	12	13	25	0.28	12	0.14	43	35	13	14	0.47
15	65.5	61.08	★ 46	22	12	13	28	0.34	12	0.16	47	35	13	14	0.55
16	69.5	65.10	★ 50	22	13	14	32	0.40	13	0.18	50	35	13	14	0.65
17	73.6	69.12	★ 54	22	13	14	32	0.46	13	0.20	54	35	13	14	0.75
18	77.8	73.14	★ 57	22	13	14	35	0.51	13	0.23	59	35	13	14	0.85
19	81.7	77.16	★ 62	22	14	15	40	0.59	14	0.26	63	35	13	14	0.98
20	85.8	81.18	★ 67	25	14	15	45	0.76	14	0.29	67	40	13	14	1.30
21	89.7	85.21	★ 71	25	14	15	48	0.85	14	0.30	68	40	13	14	1.30
22	93.8	89.24	★ 75	25	14	15	51	0.95	14	0.35	72	40	13	14	1.50
23	98.2	93.27	★ 77	25	14	15	51	1.00	14	0.38	76	40	13	14	1.60
24	101.8	97.30	★ 63	25	14	15	42	0.84	14	0.40	80	40	13	14	1.80
25	105.8	101.33	★ 63	25	14	15	42	0.88	14	0.45	84	40	13	14	2.00
26	110	105.36	★ 63	25	14	15	42	0.92	14	0.49	88	40	13	14	2.20
27	114	109.40	★ 63	25	14	15	42	0.96	14	0.50	92	40	16	17	2.30
28	118	113.43	★ 63	25	14	15	42	1.00	14	0.56	96	40	16	17	2.50
29	122	117.46	★ 63	25	14	15	42	1.00	14	0.60	96	40	16	17	2.65
30	126.1	121.50	★ 80	25	14	15	42	1.10	14	0.63	100	40	16	17	2.80
31	130.2	125.53	★ 90	28	14	15	45	1.20	14	0.65	100	50	16	17	2.95
32	134.3	129.57	★ 90	28	14	15	45	1.30	14	0.70	100	50	16	17	3.05
33	138.4	133.61	★ 90	28	14	15	45	1.30	14	0.75	100	50	16	17	3.06
34	142.6	137.64	★ 90	28	14	15	45	1.30	14	0.80	100	50	16	17	3.08
35	146.7	141.68	★ 90	28	14	15	45	1.40	14	0.85	100	50	16	17	3.10
36	151	145.72	★ 90	28	16	17	45	1.50	16	0.90	100	50	16	17	3.30
37	154.6	149.75	★ 90	28	16	17	45	1.55	16	0.99	100	50	16	17	3.40
38	158.6	153.79	★ 90	28	16	17	45	1.60	16	1.00	100	50	16	17	3.50
39	162.7	157.83	★ 90	28	16	17	45	1.65	16	1.15					
40	166.8	161.87	★ 90	28	16	17	45	1.70	16	1.20	100	50	16	17	3.60
41	171.4	165.91	★ 73	32	16	17	48	2.00	16	1.20	93	50	16	17	3.80
42	175.4	169.95	★ 73	32	16	17	48	2.05	16	1.25	93	50	16	17	4.00
43	179.7	173.98	★ 73	32	16	17	48	2.10	16	1.30					
44	183.8	178.02	★ 73	32	16	17	48	2.17	16	1.35					
45	188	182.06	★ 73	32	16	17	48	2.25	16	1.40	93	50	18	19	4.60
46	192.1	186.10	★ 73	32	16	17	48	2.30	16	1.49					
47	196	190.14	★ 73	32	16	17	48	2.37	16	1.58					
48	200.3	194.18	★ 73	32	16	17	48	2.45	16	1.63	93	50	18	19	5.00
49	204.1	198.22	★ 73	32	16	17	48	2.51	16	1.73					
50	208.3	202.26	★ 73	32	16	17	48	2.60	16	1.80	93	50	18	19	5.50
51	212.2	206.30	★ 73	32	16	17	48	2.65	16	1.88					
52	216.2	210.34	★ 73	32	16	17	48	2.72	16	1.93					
53	220.3	214.38	★ 73	32	16	17	48	2.80	16	1.98					
54	224.1	218.42	★ 73	32	16	17	48	2.90	16	2.00	93	50	18	19	5.80
60	248.6	242.66	★ 73	32	16	17	48	3.40	16	2.60	93	50	18	19	6.70
65	269	262.87	★ 83	32	16	17	55	4.10	16	3.00	93	50	20	21	10.20
70	289	283.07	★ 83	32	16	17	55	4.57	16	3.50	93	50	20	21	11.50
72	297.2	291.15	★ 83	32	20	21	55	4.80	20	3.70					
75	309.2	303.28	★ 83	32	20	21	55	5.10	20	4.00					
●80	329.4	323.49	★ 88	35	20	21	60	5.90	20	4.60					
●85	349.6	343.69	★ 88	35	20	21	60	6.50	20	5.20					
●90	369.8	363.90	★ 88	35	20	21	60	7.15	20	5.80					

备注:

1、所有型号规格的链轮均采用优质45钢,可定制不锈钢SUS304。

2、链轮齿部高频淬火、回火。

3、带★链轮的轮毂外径有沟槽,详见右上方表格。

Note:

1. All models and specifications of sprockets are made of high quality 45 steel, can be customized stainless steel SUS304.

2. Sprocket teeth high frequency quenching, tempering.

3. The outer diameter of the hub with ★ sprocket has grooves. See the table on the top right for details.

4. Sprocket with ● for welding type. 5. Packing: cartons and wooden cases.

4、带●链轮为焊接型。


5、包装方式:纸箱+木箱。

S50 链轮


S50 Sprocket




TYPE A




TYPE B




TYPE BW



TYPE B double



TYPE BW double



C=18.1

链号	No	10A
链条节距	P	15.875mm
链条内宽	W	9.53 mm
滚子直径	Dr	10.16 mm
齿宽	T	8.7 mm

齿数	落链槽尺寸	
	宽度 S	直径 GD
8	6.4	22
9		29
10		34
11		39
12		44
13		49

齿数	外径 Do	节径 P.C.D	B 型单排						A 型		B 型双排					
			凸台 Hub		孔径 d			重量 Kg	库存 孔径 d	重量 Kg	凸台 Hub		孔径 d			重量 Kg
			直径 BD	总长 BL	库存孔径 d	最小	最大				直径 BD	总长 BL	库存孔径 d	最小	最大	
8	48	41.48	★ 30	25	10	11	13.5	0.12								
9	53	46.42	★ 34	25	10	11	18	0.20								
10	58	51.37	★ 40	25	10	11	22	0.27	10	0.14	35	40	13	14	20	0.50
11	64	56.35	★ 45.5	25	12	13	28	0.33	12	0.17	40	40	13	14	22	0.50
12	69	61.34	★ 50	25	12	13	30	0.41	12	0.20	42	40	13	14	25	0.62
13	74	66.33	★ 51	25	12	13	32	0.46	12	0.23	49	40	13	14	30	0.75
14	79	71.34	52	25	12	13	32	0.52	12	0.27	54	40	13	14	32	0.90
15	84	76.35	57	25	12	13	35	0.62	12	0.30	59	40	13	14	38	1.10
16	89	81.37	62	25	14	15	40	0.72	14	0.35	64	45	13	14	42	1.40
17	94	86.39	67	25	14	15	45	0.83	14	0.40	68	45	13	14	45	1.50
18	100	91.42	72	28	14	15	48	1.00	14	0.45	74	45	13	14	48	1.80
19	105	96.45	73	28	14	15	48	1.10	14	0.48	79	45	16	17	55	2.10
20	110	101.48	73	28	14	15	48	1.20	14	0.50	84	45	16	17	57	2.30
21	115	106.51	73	28	14	15	48	1.20	14	0.60	89	45	16	17	60	2.60
22	120	111.55	73	28	16	17	48	1.30	16	0.66	94	50	16	17	63	3.00
23	125	116.58	73	28	16	17	48	1.30	16	0.72	99	50	16	17	66	3.50
24	130	121.62	73	28	16	17	48	1.40	16	0.78	105	50	16	17	70	3.80
25	135	126.66	73	28	16	17	48	1.50	16	0.85	105	50	16	17	70	4.20
26	140	131.70	73	28	16	17	48	1.50	16	0.90	105	50	18	19	70	4.50
27	145	136.74	73	28	16	17	48	1.50	16	1.00	105	50	18	19	70	4.80
28	150	141.79	73	28	16	17	48	1.60	16	1.05	110	50	18	19	75	5.10
29	155	146.83	73	28	16	17	48	1.70	16	1.12	110	50	18	19	75	5.50
30	161	151.87	73	28	16	17	48	1.80	16	1.20	120	50	18	19	80	5.80
31	166	156.92	73	28	16	17	48	1.85	16	1.30	120	50	18	19	80	5.90
32	171	161.96	73	28	16	17	48	1.90	16	1.35	120	50	18	19	80	6.00
33	176	167.01	73	28	16	17	48	2.00	16	1.45	120	50	18	19	80	6.50
34	181	172.05	73	28	16	17	48	2.10	16	1.55	120	50	18	19	80	6.80
35	186	177.10	73	28	16	17	48	2.20	16	1.65	117	50	18	19	80	7.00
36	191	182.14	83	35	19	20	55	2.85	19	1.75	117	50	18	19	80	7.00
37	196	187.19	83	35	19	20	55	2.95	19	1.85						
38	201	192.24	83	35	19	20	55	3.05	19	1.95	117	50	18	19	80	8.00
39	206	197.29	83	35	19	20	55	3.15	19	2.05		50		24		
40	211	202.33	83	35	19	20	55	3.25	19	2.15	117	56	23	24	80	9.00
41	216	207.38	83	35	19	20	55	3.40	19	2.25	117	56	23	24		
42	221	212.43	83	35	19	20	55	3.50	19	2.40	98	56	23	24	66	8.88
44	231	222.53	83	35	19	20	55	3.70	19	2.60						
45	237	227.58	83	35	19	20	55	3.85	19	2.70	98	56	23	24	66	9.96
48	252	242.73	83	35	19	20	55	4.20	19	3.10	98	56	23	24	66	8.00
49	257	247.78	83	35	19	20	55	4.35	19	3.27						
50	262	252.82	83	35	19	20	55	4.50	19	3.40	98	56	23	24	66	9.00
51	267	257.88	83	35	19	20	55	4.62	19	3.55						
52	272	262.92	83	35	19	20	55	4.76	19	3.69						
53	277	267.97	83	35	19	20	55	4.91	19	3.83						
54	282	273.02	83	35	19	20	55	5.05	19	3.95	98	63	23	24	66	9.90
55	287	278.08	83	35	19	20	55	5.20	19	4.13						
56	292	283.13	83	35	19	20	55	5.36	19	4.28						
57	297	288.18	83	35	19	20	55	5.51	19	4.44						
60	312	303.33	83	35	19	20	55	6.00	19	4.90	98	63	23	24	66	11.70
65	338	328.58	93	40	20	21	63	7.40	20	5.75	98	63	23	24	66	13.00
●68	353	343.74	93	40	20	21	63	7.94	20	6.32						
●70	363	353.84	93	40	20	21	63	8.30	20	6.70	98	63	23	24	66	15.00
●75	388	379.10	93	40	20	21	63	9.35	20	7.70						
●80	414	404.36	98	45	20	21	66	10.50	20	8.70						
●85	439	429.62	98	45	20	21	66	12.00								
●90	464	454.88	98	45	20	21	66	13.20	20	11.00						

备注:

- 1、所有型号规格的链轮均采用优质45钢，可定制不锈钢SUS304。
- 2、链轮齿部高频淬火、回火。
- 3、带★链轮的轮毅外径有沟槽，详见右上方表格。
- 4、带●链轮为焊接型。
- 5、包装方式：纸箱+木箱。


Note:

1. All models and specifications of sprockets are made of high quality 45 steel, can be customized stainless steel SUS304.
2. Fprocket teeth high frequency quenching, tempering.
3. The outer diameter of the hub with ★ sprocket has grooves. See the table on the top right for details.
4. Sprocket with ● for welding type. 5. Packing: cartons and wooden cases.


S06 链轮

S06 Sprocket


TYPE A




TYPE B




TYPE BW



TYPE B double



TYPE BW double



C=22.8



链号	No	12A
链条节距	P	19.05 mm
链条内宽	W	12.7 mm
滚子直径	Dr	11.91 mm
齿宽	T	11.7 mm

齿数	落链槽尺寸	
	宽度 S	直径 GD
8	8.0	26
9		32
10		37
11		45

齿数	外径 D0	节径 P.C.D	B 型单排						A 型		B 型双排					
			凸台 Hub		孔径 d			重量 Kg	库存孔径 d	重量 Kg	凸台 Hub		孔径 d			重量 Kg
			直径 BD	总长 BL	库存孔径 d	最小	最大				直径 BD	总长 BL	库存孔径 d	最小	最大	
8	58	49.78	★34	32	12	13	20	0.30			26	50	13			
9	64	55.70	★43	32	12	13	25	0.40			32	50	13			
10	70	61.65	★49	32	14	15	30	0.49	14	0.27	35	50	13	14	20	0.90
11	76	67.62	★51	32	14	15	32	0.60	14	0.30	44	50	13	14	25	1.00
12	83	73.60	51	32	14	15	32	0.69	14	0.38	50	50	13	14	30	1.20
13	89	79.60	57	32	14	15	35	0.81	14	0.45	57	50	16	17	35	1.40
14	95	85.61	62	32	16	17	40	0.96	16	0.50	64	56	16	17	42	1.80
15	101	91.62	68	32	16	17	45	1.10	16	0.60	70	56	16	17	46	2.10
16	107	97.65	73	32	16	17	48	1.30	16	0.65	76	56	16	17	51	2.50
17	113	103.67	73	32	16	17	48	1.40	16	0.75	82	56	16	17	55	2.60
18	119	109.70	83	40	16	17	55	2.00	16	0.84	88	56	18	19	60	3.20
19	126	115.74	83	40	16	17	55	2.10	16	0.93	94	56	18	19	63	3.70
20	132	121.78	83	40	16	17	55	2.20	16	1.05	100	56	18	19	66	4.20
21	138	127.82	83	40	16	17	55	2.30	16	1.15	100	56	18	19	66	4.40
22	144	133.86	83	40	16	17	55	2.50	16	1.25	100	56	18	19	66	4.90
23	150	139.90	83	40	16	17	55	2.50	16	1.40	100	56	20	21	66	4.70
24	156	145.95	83	40	18	19	55	2.60	18	1.50	120	56	20	21	80	6.00
25	162	151.99	83	40	18	19	55	2.70	18	1.62	120	56	20	21	80	6.40
26	168	158.04	83	40	18	19	55	2.90	18	1.78	120	56	20	21	80	6.80
27	174	164.09	83	40	18	19	55	3.00	18	1.90	120	56	20	21	80	7.30
28	180	170.14	83	40	18	19	55	3.10	18	2.05	120	56	20	21	80	7.80
29	187	176.19	83	40	18	19	55	3.30	18	2.20	120	56	20	21	80	8.20
30	193	182.25	83	40	18	19	55	3.40	18	2.35	130	56	20	21	89	8.00
31	199	188.30	83	40	20	21	55	3.64	20	2.50	127	56	20	21	89	9.30
32	205	194.35	83	40	20	21	55	3.80	20	2.68	127	56	20	21	89	9.50
33	211	200.41	83	40	20	21	55	4.00	20	2.85	127	56	20	21	89	9.70
34	217	206.46	83	40	20	21	55	4.15	20	3.02	127	56	20	21	89	10.50
35	223	212.52	83	40	20	21	55	4.33	20	3.25	127	56	20	21	89	11.00
36	229	218.57	83	40	20	21	55	4.52	20	3.40	98	56	20	21	66	8.50
37	235	224.63	83	40	20	21	55	4.70	20	3.60						
38	241	230.69	83	40	20	21	55	4.90	20	3.80	98	56	20	21	66	9.00
39	247	236.74	83	40	20	21	55	5.10	20	4.00						
40	253	242.80	83	40	20	21	55	5.30	20	4.20	98	56	20	21	66	9.70
42	266	254.92	93	45	20	21	63	6.40	20	4.63	107	56	23	24	75	11.00
43	272	260.98	93	45	20	21	63	6.60	20	4.85						
44	278	267.03	93	45	20	21	63	6.88	20	5.10						
45	284	273.09	93	45	20	21	63	7.10	20	5.30	107	71	23	24	75	12.80
48	302	291.27	93	45	20	21	63	7.85	20	6.10	107	71	23	24	75	14.00
●60	375	363.99	93	45	20	21	63	11.30	20	9.50	107	71	23	24	75	21.50
●64	399	388.24	93	45	26	27	63	12.50								
●65	405	394.30	107	45	26	27	75	13.50	26	11.20	107	71	28	29	75	24.00
●70	436	424.61	107	45	26	27	75	15.30	26	13.00	107	71	28	29	75	30.00
●72	448	436.73			26				26	13.70						
●75	466	454.92	107	45	26	27	75	17.20	26	14.90						
●80	496	485.23	117	50	26	27	80	20.00	26	16.90						
●85	527	515.54	117	50	26	27	80	22.30	26							
●90	557	545.85	117	50	26	27	80	24.60	26	21.40						

备注:

- 1、所有型号规格的链轮均采用优质45钢,可定制不锈钢SUS304。
- 2、链轮齿部高频淬火、回火。
- 3、带★链轮的轮毂外径有沟槽,详见右上方表格。

Note:

1. All models and specifications of sprockets are made of high quality 45 steel, can be customized stainless steel SUS304.
2. Sprocket teeth high frequency quenching, tempering.
3. The outer diameter of the hub with ★ sprocket has grooves. See the table on the top right for details.
4. Sprocket with ● for welding type.
5. Packing: cartons and wooden cases.


- 4、带●链轮为焊接型。
- 5、包装方式:纸箱+木箱。

S80 链轮


S80 Sprocket




TYPE A




TYPE B




TYPE BW




TYPE B double



TYPE BW double



TYPE BWW double



链号	No	16A
链条节距	P	25.4 mm
链条内宽	W	15.88 mm
滚子直径	Dr	15.88 mm
齿宽	T	14.6 mm

齿数	落链槽尺寸	
	宽度 S	直径 GD
9	10.4	44

齿数	外径 Do	节径 P.C.D	B 型单排						A 型		B 型双排					
			凸台 Hub		孔径 d			重量 Kg	库存 孔径 d	重量 Kg	凸台 Hub		孔径 d			重量 Kg
			直径 BD	总长 BL	库存孔径 d	最小	最大				直径 BD	总长 BL	库存孔径 d	最小	最大	
9	85	74.27	★58	40	14	15	35	0.87								
10	93	82.19	52	40	15	16	32	1.02	15	0.60	58	63	20	21	35	2.00
11	102	90.16	60	40	15	16	38	1.25	15	0.73	60	63	20	21	38	2.50
12	110	98.14	67	40	15	16	45	1.60	15	0.85	69	63	20	21	46	2.70
13	118	106.14	77	40	16	17	51	1.90	16	1.00	80	63	20	21	55	3.40
14	127	114.15	77	40	16	17	51	2.15	16	1.16	88	63	20	21	60	3.90
15	135	122.17	93	40	20	21	63	2.30	20	1.30	95	63	20	21	63	4.40
16	143	130.20	93	40	20	21	63	2.50	20	1.50	100	71	20	21	66	5.40
17	151	138.23	93	40	20	21	63	2.95	20	1.70	100	71	20	24	66	6.00
18	159	146.27	93	40	20	21	63	3.15	20	1.90	120	71	23	24	80	7.50
19	167	154.32	93	40	20	21	63	3.40	20	2.10	120	71	23	24	80	8.00
20	176	162.37	93	40	20	21	63	3.60	20	2.35	130	71	23	24	89	9.00
21	184	170.42	93	40	20	21	63	3.85	20	2.57	130	71	23	24	89	10.30
22	192	178.48	107	45	26	27	75	5.00	26	2.82	117	71	23	24	80	11.00
23	200	186.54	107	45	26	27	75	5.23	26	3.10	117	71	23	24	80	11.80
24	208	194.60	107	45	26	27	75	5.50	26	3.35	117	80	23	24	80	12.60
25	216	202.66	107	45	26	27	75	5.80	26	3.65	117	80	23	24	80	13.40
26	224	210.72	107	45	26	27	75	6.10	26	3.95	117	80	23	24	80	14.30
27	233	218.79	107	45	26	27	75	6.40	26	4.25						
28	241	226.86	107	45	26	27	75	6.75	26	4.60	117	80	23	24	80	16.00
29	249	234.93	107	45	26	27	75	7.10	26	4.93			23			
30	257	243.00	107	45	26	27	75	7.40	26	5.30	117	80	23	24	80	18.30
31	265	251.07	107	45	26	27	75	7.80	26	5.63						
32	273	259.14	107	45	26	27	75	8.15	26	6.00	117	80	28	29	80	20.40
33	281	267.21	107	45	26	27	75	8.50	26	6.40						
34	289	275.29	107	45	26	27	75	8.90	26	6.80						
35	297	283.36	107	45	26	27	75	9.30	26	7.20	117	80	28	29	80	23.90
36	306	291.43	117	50	26	27	80	10.60	26	7.60	117	80	28	29	80	25.10
37	314	299.51	117	50	26	27	80	11.00	26	8.00	117	80	28	35	80	26.10
38	322	307.58	117	50	26	27	80	11.40	26	8.50	127	80	28	29	89	27.70
39	330	315.66	117	50	26	27	80	11.90	26	8.90	127	80	28	29	89	22.10
40	338	323.74	117	50	26	27	80	12.40	26	9.40	127	90	33	34	89	30.40
41	346	331.81	117	50	26	27	80	12.80	26	9.90			33			
42	354	339.89	117	50	26	27	80	13.30	26	10.30	127	90	33	34	89	33.00
43	362	347.97	117	50	26	27	80	13.80	26	10.80						
44	370	356.04	117	50	26	27	80	14.30	26	11.40	127	90	33	34	89	27.50
45	378	364.12	117	50	26	27	80	14.90	26	11.90	127	90	33	34	89	43.00
●48	403	388.36	117	50	26	27	80	15.80	26	13.50						
●49	411	396.44			26				26	14.08						
●54	451	436.84	117	50	26	27	80	20.00	26	17.10	127	90	33	34	89	52.50
●60	500	485.33	117	50	26	27	80	23.10	26	21.10	127	90	33	34	89	64.00
●64	532	517.65	117	50	26	27	80		26	24.05						
●65	540	525.73	127	63	26	27	89	24.80	26	24.80	127	90	33	34	89	73.50
●68	548	533.82			26				26	25.58						
●70	581	566.15	127	63	26	27	89	32.10	26	28.80	127	90	33	34	89	90.40
●75	621	606.56	127	63	26	27	89	36.20	26	33.10						
●80	662	646.97	137	71	26	27	95	42.90	26	37.60						
●90	743	727.80	137	71	26	27	95	53.00	26	47.60						

备注:


- 1、所有型号规格的链轮均采用优质45钢，可定制不锈钢SUS304。
- 2、链轮齿部高频淬火、回火。
- 3、带★链轮的轮毂外径有沟槽，详见右上方表格。
- 4、带●链轮为焊接型。
- 5、包装方式：纸箱+木箱。

Note:

1. All models and specifications of sprockets are made of high quality 45 steel, can be customized stainless steel SUS304.
2. Sprocket teeth high frequency quenching, tempering.
3. The outer diameter of the hub with ★ sprocket has grooves. See the table on the top right for details.
4. Sprocket with ● for welding type.
5. Packing: cartons and wooden cases.

S100 链轮 S100 Sprocket

TYPE A TYPE B TYPE BW TYPE CW TYPE B double TYPE BW double TYPE BWW double

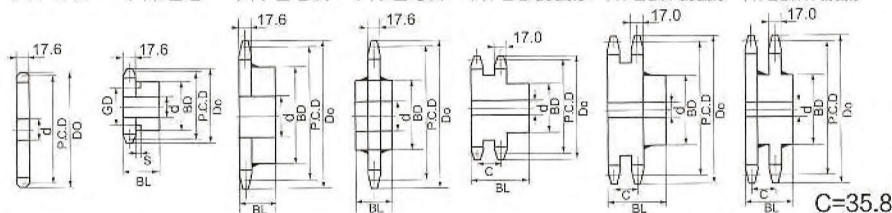

链号	No	20A
链条节距	P	31.75 mm
链条内宽	W	19.05 mm
滚子直径	Dr	19.05 mm
齿宽	T	17.6 mm

齿数	落链槽尺寸	
	宽度 S	直径 GD
9	11.5	55

齿数	外径 Do	节径 P.C.D	B 型单排						A 型		B 型双排					
			凸台 Hub		孔径 d			重量 Kg	库存 孔径 d	重量 Kg	凸台 Hub		孔径 d			重量 Kg
			直径 BD	总长 BL	库存孔径 d	最小	最大				直径 BD	总长 BL	库存孔径 d	最小	最大	
9	106	92.83	★70	50	20	21	40	1.60								
10	117	102.74	65	50	20	21	45	1.90	20	1.10	70	80	23	24	46	3.50
11	127	112.70	75	50	20	21	51	2.30	20	1.30	80	80	23	24	55	4.20
12	138	122.67	86	50	20	21	57	2.90	20	1.60	90	80	23	24	60	5.00
13	148	132.67	94	50	20	21	63	3.10	20	1.90	100	80	23	24	66	6.00
14	158	142.68	98	50	20	21	66	3.60	20	2.15	110	80	23	24	75	7.00
15	168	152.71	98	50	20	21	66	4.20	20	2.50	120	80	28	29	80	7.10
16	179	162.74	98	50	20	21	66	4.60	20	2.83	130	80	28	29	89	7.70
17	189	172.79	107	50	20	21	75	5.30	20	3.20	130	80	28	29	89	8.90
18	199	182.84	107	50	20	21	75	5.70	20	3.60	130	80	28	29	89	9.60
19	209	192.90	107	50	20	21	75	6.10	20	4.00	130	90	28	29	89	12.80
20	220	202.96	107	50	20	21	75	6.50	20	4.40	130	90	28	29	89	13.50
21	230	213.03	107	50	20	21	75	7.00	20	4.90	130	90	28	29	89	14.30
22	240	223.10	117	56	26	27	80	7.90	26	5.35	127	90	28	29	89	19.35
23	250	233.17	117	56	26	27	80	8.50	26	5.80	127	90	28	29	89	20.85
24	260	243.25	117	56	26	27	80	8.80	26	6.40	137	90	33	34	95	22.62
25	270	253.32	117	56	26	27	80	9.30	26	6.90	137	90	33	34	95	24.25
26	281	263.40	117	56	26	27	80	9.80	26	7.50	137	90	33	34	95	25.94
27	291	273.49	117	56	26	27	80	10.30	26	8.10						
28	301	283.57	117	56	26	27	80	10.90	26	8.70	137	90	33	34	95	29.52
29	311	293.66	117	56	26	27	80	11.50	26	9.30						
30	321	303.75	117	56	26	27	80	12.10	26	10.00	137	90	33	34	95	33.37
32	341	323.92	117	56	26	27	80	14.50	26	11.35	137	90	33	34	95	37.48
33	352	334.01	117	56	26	27	80	16.10	26	12.00						
34	362	344.10	117	56	26	27	80	16.60	26	12.80						
35	372	354.20	127	63	26	27	89	17.50	26	13.50	137	90	33	34	95	44.15
●36	382	364.29	127	63	26	27	89	18.00	26	14.40	137	90	33	34	95	46.50
●37	392	374.38	127	63	26	27	89	18.90	26	15.10						
●38	402	384.48	127	63	26	27	89	19.50	26	16.00	137	90	33	34	95	51.94
●39	412	394.57	127	63	26	27	89	20.00	26	16.80						
●40	422	404.67	127	63	26	27	89	20.40	26	17.70	147	100	33	34	103	58.46
●41	433	414.77	127	63	26	27	89	21.50	26	18.60						
●42	443	424.86	127	63	26	27	89	22.60	26	19.50	147	100	33	34	103	63.90
●43	453	434.96			26				26	20.50						
●44	463	445.06			26				26	21.45						
●45	473	455.15	127	63	26	27	89	24.70	26	22.40	147	100	33	34	103	72.56
●46	483	465.25			26				26	23.40						
●47	493	475.35	127	63	26	27	89	26.70								
●48	503	485.45	127	63	26	27	89	27.50	26	25.50	147	100	33	34	103	81.81
●50	524	505.65	127	63	26	27	89	30.00	26	27.70	147	100	33	34	103	88.31
●52	544	525.85			26				26	29.90						
●54	564	546.05	147	80	26	27	103	37.40	26	32.30	147	100	33	34	103	102.19
●55	574	556.15	147	80	26	27	103	41.60								
●60	625	606.66	147	80	26	27	103	44.30	26	39.90	147	125	33	34	103	127.87
●65	675	657.17	147	80	26	27	103	54.50	26	46.80						
●70	726	707.68	147	100	26	27	103	64.70	26	54.30						
●75	777	758.20	147	100	30	31	103	72.70	30	62.30						


备注:

- 1、所有型号规格的链轮均采用优质45钢,可定制不锈钢SUS304。
- 2、链轮齿部高频淬火、回火。
- 3、带★链轮的轮毂外径有沟槽,详见右上方表格。
- 4、带●链轮为焊接型。
- 5、包装方式:纸箱+木箱。

Note:

1. All models and specifications of sprockets are made of high quality 45 steel, can be customized stainless steel SUS304.
2. Sprocket teeth high frequency quenching, tempering.
3. The outer diameter of the hub with ★ sprocket has grooves. See the table on the top right for details.
4. Sprocket with ● for welding type.
5. Packing: cartons and wooden cases.

S120 链轮 S120 Sprocket

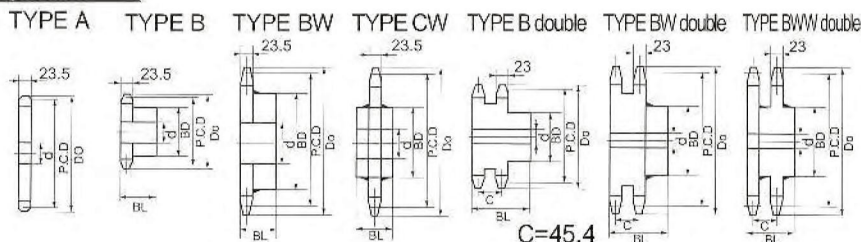

链号	No	24A
链条节距	P	38.1 mm
链条内宽	W	25.4 mm
滚子直径	Dr	22.23 mm
齿宽	T	23.5 mm

齿数	外径 Do	节径 P.C.D	B 型单排						A 型		B 型双排					
			凸台 Hub		孔径 d			重量 Kg	库存 孔径 d	重量 Kg	凸台 Hub		孔径 d			重量 Kg
			直径 BD	总长 BL	库存孔径 d	最小	最大				直径 BD	总长 BL	库存孔径 d	最小	最大	
10	140	123.29	78	56	23	24	51	3.20	23	2.16	80	100	26	27	55	8.00
11	153	135.23	91	56	25	26	60	4.00	25	2.60	90	100	26	27	60	8.70
12	165	147.21	98	56	25	26	66	4.80	25	3.10	100	100	28	29	66	9.20
13	177	159.20	98	56	25	26	66	5.30	25	3.60	115	100	28	29	75	10.90
14	190	171.22	107	56	25	26	75	6.30	25	4.20	120	100	28	29	80	11.40
15	202	183.25	117	63	25	26	80	7.80	25	4.80	120	100	33	34	80	13.20
16	214	195.29	117	63	25	26	80	8.40	25	5.50	140	100	33	34	95	16.50
17	227	207.35	117	63	25	26	80	9.10	25	6.20	140	100	33	34	95	19.00
18	239	219.41	117	63	25	26	80	9.90	25	6.95	150	100	33	34	103	21.00
19	251	231.48	117	63	25	26	80	10.70	25	7.70	150	100	33	34	103	23.00
20	263	243.55	127	63	25	26	89	12.10	25	8.55	150	100	33	34	103	26.00
21	276	255.63	127	63	25	26	89	13.00	25	9.40	150	100	33	34	103	28.00
22	288	267.72	127	63	26	27	89	13.40	26	10.30	147	100	33	34	103	30.00
23	300	279.80	127	63	26	27	89	14.50	26	11.30	147	100	33	34	103	31.00
24	312	291.90	127	63	26	27	89	15.20	26	12.30	157	100	33	34	110	32.00
25	324	303.99	127	63	26	27	89	16.20	26	13.30	157	100	33	34	110	33.00
26	337	316.09	127	63	26	27	89	17.20	26	14.40	157	100	33	34	110	35.00
27	349	328.19			26				26	15.50						
28	361	340.29	137	71	26	27	95	20.90	26	16.70	157	100	33	34	110	39.00
29	373	352.39			26				26	17.80						
30	385	364.49	137	71	26	27	95	23.20	26	19.20	157	100	33	34	110	43.90
31	398	376.60			26				30	20.40						
●32	410	388.71	137	71	30	31	95	25.70	30	21.80	157	100	33	34	110	47.00
●33	422	400.82	137	71	30	31	95	28.40	30	23.20						
●34	434	412.93			30				30	24.60						
●35	446	425.04	137	71	30	31	95	29.70	30	26.10	157	100	33	34	110	56.80
●36	458	437.15	137	71	30	31	95	32.00	30	27.60	157	100	38	39	110	60.00
●38	483	461.37	137	71	30	31	95	35.00	30	30.80	157	100	38	39	110	67.00
●40	507	485.60	147	80	30	31	103	38.20	30	34.10	177	140	38	39	125	84.30
●42	531	509.83	147	80	30	31	103	42.00	30	37.60	177	140	38	39	125	87.00
●44	556	534.07			30				30	41.20						
●45	568	546.19	147	80	30	31	103	47.60	30	43.10	177	140	38	39	125	98.50
●46	580	558.30			30				30	45.10						
●48	604	582.54	147	80	30	31	103	53.00	30	49.00	177	140	38	39	125	104.00
●50	628	606.78	147	80	30	31	103	58.00	30	53.30	177	140	38	39	125	115.00
●54	677	655.26	147	100	30	31	103	65.20	30	62.10	177	140	38	39	125	121.00
●60	750	727.99	167	100	30	31	103	78.00	30	76.70	177	160	38	39	125	131.60

备注:


- 1、所有型号规格的链轮均采用优质45钢，可定制不锈钢SUS304。
- 2、链轮齿部高频淬火、回火。
- 3、带★链轮的轮轂外径有沟槽，详见右上方表格。
- 4、带●链轮为焊接型。
- 5、包装方式：纸箱+木箱。

Note:


1. All models and specifications of sprockets are made of high quality 45 steel, can be customized stainless steel SUS304.
2. Fprocket teeth high frequency quenching, tempering.
3. The outer diameter of the hub with ★ sprocket has grooves. See the table on the top right for details.
4. Sprocket with ● for welding type.
5. Packing: cartons and wooden cases.

S140 链轮 S140 Sprocket


TYPE A




TYPE B



TYPE BW



TYPE CW



链号	No	28A
链条节距	P	44.45 mm
链条内宽	W	25.4 mm
滚子直径	Dr	25.4 mm
齿宽	T	23.5 mm

齿数	外径 Do	节径 P.C.D	B 型单排					A 型号	
			凸台 Hub		孔径 d			重量 Kg	库存孔径 d
			直径 BD	总长 BL	库存孔径 d	最小	最大		重量 Kg
10	163	143.84	98	56	26	27	66	4.90	26
11	178	157.78	106	56	26	27	70	5.50	26
12	193	171.74	117	56	26	27	80	6.60	26
13	207	185.74	117	63	26	27	80	7.90	26
14	221	199.76	127	63	26	27	89	9.30	26
15	236	213.79	127	63	26	27	89	10.10	26
16	250	227.84	127	63	26	27	89	11.00	26
17	264	241.91	127	63	26	27	89	12.00	26
18	279	255.98	127	63	26	27	89	13.00	26
19	293	270.06	137	71	26	27	95	15.60	26
20	307	284.14	137	71	26	27	95	16.70	26
21	322	298.24	137	71	26	27	95	17.90	26
●22	336	312.34	137	71	30	31	95	18.40	30
●23	350	326.44	137	71	30	31	95	20.10	30
●24	364	340.54	137	71	30	31	95	20.90	30
●25	379	354.65	147	80	30	31	103	24.10	30
●26	393	368.77	147	80	30	31	103	25.50	30
●27	407	382.88	147	80	30	31	103	28.20	30
●28	421	397.00	147	80	30	31	103	30.10	30
●30	450	425.24	147	80	30	31	103	31.50	30
●32	478	453.49	147	80	30	31	103	36.00	30
●35	521	495.88	157	90	30	31	110	42.90	30
●36	535	510.01	157	90	30	31	110	47.40	30
●38	563	538.27	157	90	30	31	110	51.00	30
●40	591	566.54	157	90	30	31	110	53.10	30
●42	620	594.81	157	90	30	31	110	60.00	30
●45	662	637.22	167	100	30	31	118	68.00	30
●48	705	679.63	167	100	30	31	118	75.00	30
●50	733	707.91	167	100	30	31	118	85.30	30
●54	790	764.47	167	100	35	36	118	97.40	35
●60	875	849.32	167	112	35	36	118	119.30	35

备注:

1、所有型号规格的链轮均采用优质45钢，可定制不锈钢SUS304。

2、链轮齿部高频淬火、回火。

3、带★链轮的轮毂外径有沟槽，详见右上方表格。

Note:

1. All models and specifications of sprockets are made of high quality 45 steel, can be customized stainless steel SUS304.

2. Sprocket teeth high frequency quenching, tempering.

3. The outer diameter of the hub with ★ sprocket has grooves. See the table on the top right for details.

4. Sprocket with ● for welding type. 5. Packing: cartons and wooden cases.

4、带●链轮为焊接型。


5、包装方式：纸箱+木箱。

S160 链轮


S160 Sprocket




TYPE A




TYPE B



TYPE BW



TYPE CW



链号	No	32A
链条节距	P	50.8 mm
链条内宽	W	31.75 mm
滚子直径	Dr	28.58 mm
齿宽	T	29.4 mm

齿数	外径 Do	节径 P.C.D	B 型单排						A 型号	
			凸台 Hub		孔径 d			重量 Kg	库存孔径 d	重量 Kg
			直径 BD	总长 BL	库存孔径 d	最小	最大			
10	187	164.39	105	63	26	27	70	6.80	26	4.85
11	204	180.31	117	63	26	27	80	8.30	26	5.85
12	220	196.28	127	63	26	27	89	9.90	26	6.90
13	237	212.27	137	71	26	27	95	12.50	26	8.10
14	253	228.29	137	71	26	27	95	13.80	26	9.40
15	269	244.33	137	71	30	31	95	15.20	30	10.80
16	286	260.39	147	71	30	31	103	17.40	30	12.25
17	302	276.46	147	71	30	31	103	18.90	30	13.80
18	319	292.55	147	71	30	31	103	20.60	30	15.50
19	335	308.64	147	71	30	31	103	22.30	30	17.20
20	351	324.74	147	71	30	31	103	24.20	30	19.00
21	368	340.84	147	71	30	31	103	26.10	30	21.00
●22	384	356.96	167	80	35	36	118	30.20	35	23.00
●23	400	373.07			35				35	25.10
●24	416	389.19	167	80	35	36	118	34.40	35	27.40
●25	433	405.32	167	80	35	36	118	36.60	35	29.70
●26	449	421.45	167	80	35	36	118	38.90	35	32.10
●28	481	453.72			35				35	37.30
●30	514	485.99	167	100	35	36	118	52.30	35	42.70
●32	546	518.28	167	100	35	36	118	59.00	35	48.70
●35	595	566.71	167	100	35	36	118	66.90	35	58.10
●38	644	615.17			35				35	68.50
●40	676	647.47	167	112	35	36		88.00	35	75.10
●42	708	679.78			35				35	83.60
●45	757	728.25	187	125	35	36	132	115.00	35	96.00
●48	806	776.72	187	125	35	36	132	128.00	35	109.00
●50	838	809.04	187	125	35	36	132	138.70	35	118.50
●54	903	873.68	187	125	35	36	132	158.40	35	138.20
●60	1000	970.65	187	125	35	36	132	190.80	35	170.00

备注:

- 1、所有型号规格的链轮均采用优质45钢，可定制不锈钢SUS304。
- 2、链轮齿部高频淬火、回火。
- 3、带★链轮的轮毂外径有沟槽，详见右上方表格。
- 4、带●链轮为焊接型。
- 5、包装方式：纸箱+木箱。

Note:

1. All models and specifications of sprockets are made of high quality 45 steel, can be customized stainless steel SUS304.
2. Sprocket teeth high frequency quenching, tempering.
3. The outer diameter of the hub with ★ sprocket has grooves. See the table on the top right for details.
4. Sprocket with ● for welding type.
5. Packing: cartons and wooden cases.


链条联轴器链轮 Chain coupling sprocket

链条联轴器是将2列滚子链以及与其咬合的2个链轮组装而成的联轴器。

链条的一端采用了能自由插拔的接合销，连接和拆卸都非常简单。

沿着与轴垂直的方向，外壳可分离成两个部分，在 KC3012-KC8022 的外壳两侧设置了V槽，并装入O型圈防止漏油。

The chain coupling is a coupling which assembles 2 row roller chains and 2 sprockets which are engaged with the chain chain. One end of the chain uses the joint pin which can insert and pull freely. The connection and disassembly are very simple. Along the direction perpendicular to the axis, the housing can be separated into two parts, in the KC3012-KC8022 on both sides of the Housing V slot, and installed O-ring to prevent oil leakage.

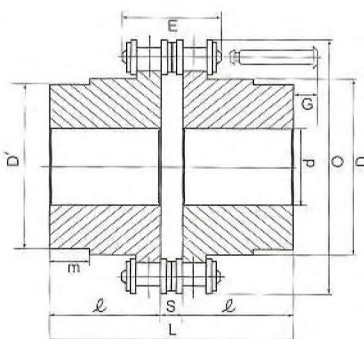

标准链条 联轴器主体

Standard chain, coupling body

标准链条 联轴器编号	使用链条		轴径范围d		主体尺寸								大致重量 Kg
	节距	最大宽度 E	最小 (底孔 H10)	最大	O	D	D'	m	L	ℓ	S	G	
KC-3012	9.525	23.9	14(12)	16	45	27	25.2	5.5	64.8	30	4.8	6	0.4
KC-4012	12.70	32.0	14(12)	22	61	36	32.5	10	79.4	36	7.4	11	0.8
KC-4014	12.70	32.0	14(12)	28	69	45	43	9	79.4	36	7.4	11	1.1
KC-4016			16(14.5)	32	77	51	48	15	87.4	40		7	1.4
KC-5014	15.875	39.9	16(14)	35	86	56	53	16	99.7	45	9.7	12	2.2
KC-5016			18(16)	40	96	63	60	16				12	2.7
KC-5018	15.875	39.9	18(16)	45	106	73	70	16	99.7	45	9.7	12	3.8
KC-6018	19.05	52.5	22(20)	55	128	88	85	18	123.5	56	11.5	19	6.2
KC-6020	19.05	52.5	22(20)	60	140	103	98	16	123.5	56	11.5	19	7.8
KC-6022			22(20)	70	152	115	110	12					10.4
KC-8018	25.40	66.2	22(20)	80	170	115	110	15	141.2	63	15.2	31	12.7
KC-8020			22(20)	85	186	125	121	12	145.2	65		29	16.0
KC-8022	25.40	66.2	22(20)	100	202	143	140	19	157.2	71	15.2	23	20.2
KC-10020	31.75	79.0	27(25)	110	232	162	160	40	178.8	80	18.8	32	33.0
KC-12018	38.10	101.2	37(35)	125	255	173	170	56	202.7	90	22.7	53	47.0
KC-12022			37(35)	140	303	213	210	55	222.7	100		43	72.0

双驱动链轮 Double Drive Sprocket

标准A型单链双排链轮是设计用于二根单排链条的。链轮是选用优质45” 碳钢制造，并对齿部进行淬火处理。下表中所示的最大孔径是基于使用标准键及带螺钉孔的链这样常用的工作状况的。实际孔径取决于平常的机械设计，键的配合松紧也根据设计要求来决定。

The standard Type A single chain double sprocket wheel is designed for two single chain. The sprocket is made of high quality 45” carbon steel, and the teeth are quenched.”. The maximum aperture shown in the following table is based on common operating conditions such as the use of standard keys and chains with screw holes. The actual aperture is determined by the usual mechanical design, and the fit of the keys is also determined by the design requirements.

40SD

链条节距	P	12.7 mm
链条内宽	W	7.95 mm
滚子直径	Dr	7.92 mm
齿宽	T	7.2 mm

50SD

链条节距	P	15.875mm
链条内宽	W	9.53 mm
滚子直径	Dr	10.16 mm
齿宽	T	8.7 mm

60SD

链条节距	P	19.05 mm
链条内宽	W	12.7 mm
滚子直径	Dr	11.91 mm
齿宽	T	11.7 mm

80SD

链条节距	P	25.4 mm
链条内宽	W	15.88 mm
滚子直径	Dr	15.88 mm
齿宽	T	14.6 mm

100SD


链条节距	P	31.75 mm
链条内宽	W	19.05 mm
滚子直径	Dr	19.05 mm
齿宽	T	17.6 mm

备注:

1、“T”=A型单排

NOTE:

1. “T” = A single row



材质:C45

	齿数	外径 Do	节径 P.C.D	排间距	孔径 d		凸台		重量 Kg
					最小	最大	BD	BL	
40SD	12	55	49.07	27.8	11	18	34	35	0.33
	13	59	53.07		14	20	38		0.40
	14	63	57.07		14	25	42		0.49
	15	67	61.08		14	28	46		0.57
	16	71	65.10		14	30	50		0.66
	17	76	69.12		14	32	54		0.76
	18	80	73.14		14	38	59		0.89
	19	84	77.16		14	42	63		1.00
	20	88	81.18		14	45	67		1.14
	21	92	85.21		14	48	71		1.23
50SD	12	69	61.34	31.3	14	25	43	40	0.63
	13	74	66.34		14	28	48		0.75
	14	79	71.34		14	32	53		0.90
	15	84	76.35		14	35	58		1.04
	16	89	81.37		14	42	63		1.22
	17	94	86.39		14	45	68		1.41
	18	100	91.42		14	48	73		1.61
	19	105	96.45		17	52	79		1.80
	20	110	101.48		17	57	84		1.95
	21	115	106.51		17	60	89		2.27
60SD	12	83	73.60	68.3	14	32	51	50	1.14
	13	89	79.60		17	35	57		1.39
	14	95	85.61		17	42	64		1.63
	15	101	91.62		17	46	70		1.96
	16	107	97.65		17	51	76		2.20
	17	113	103.67		17	55	82		2.56
	18	119	109.71		19	60	88		2.90
	19	126	115.74		19	63	94		3.26
	20	132	121.78		19	68	100		3.70
	21	138	127.82		19	75	107		4.13
80SD	12	110	98.14	45.4	21	46	69	60	2.52
	13	118	106.14		21	51	77		3.04
	14	127	114.15		21	57	85		3.60
	15	135	122.17		21	63	93		4.16
	16	143	130.20		21	70	102		4.89
	17	151	138.23		21	75	110		5.61
	18	159	146.27		24	80	118		6.36
	19	167	154.32		24	80	126		7.13
	20	176	162.37		24	95	134		8.03
	21	184	170.42		24	95	142		8.88
100SD	12	138	122.67	52.4	24	58	86	70	4.83
	13	148	132.67		24	65	96		5.82
	14	158	142.68		24	75	107		6.81
	15	168	152.71		29	80	117		7.98
	16	179	162.74		29	85	127		9.19
	17	189	172.79		29	96	137		9.92
	18	199	182.84		29	106	148		11.78
	19	209	192.90		29	110	158		13.24
	20	220	202.96		29	115	168		14.77
	21	230	213.03		29	125	178		15.87




双节距滚子链链轮R型 Double pitch roller sprocket type R

R型滚子链链轮。

R型滚子链链轮是单切齿的双节距链轮。

R-type roller sprocket.

R-type roller sprocket is a single-tooth double-pitch sprocket.



2042(t=7.2) P=25.4 W=7.59 Dr=15.88

齿数	节径 P.C.D	外径 Do	孔径d		凸台		重量 kg
			最小	最大	直径BD	总长BL	
10	82.20	93	16	42	63	25	0.70
11	90.16	102	16	42	63	25	0.77
12	98.14	108	16	42	63	25	0.84
13	106.14	118	17	42	63	25	0.97
14	114.15	127	17	42	63	25	1.07
15	122.17	135	21	45	68	28	1.26
16	130.20	143	21	45	68	28	1.30
18	146.27	159	21	45	68	28	1.45
20	162.37	176	21	45	68	28	1.80
24	194.60	208	27	48	73	32	2.28
25	202.66	216	27	48	73	32	2.42
26	210.72	224	27	48	73	32	2.56
28	226.86	241	27	48	73	32	2.87
30	243.00	257	27	48	73	32	3.19

2052(t=8.7) P=31.75 W=9.53 Dr=19.05

齿数	节径 P.C.D	外径 Do	孔径d		凸台		重量 kg
			最小	最大	直径BD	总长BL	
10	102.75	116	21	48	73	28	1.10
11	112.70	127	21	48	73	28	1.20
12	122.67	138	21	48	73	28	1.30
13	132.67	148	21	48	73	28	1.50
14	142.68	158	21	48	73	28	1.90
15	152.71	168	21	48	73	28	2.00
16	162.74	179	21	48	73	28	2.30
18	182.84	199	21	55	83	35	2.75
20	202.96	220	21	55	83	35	3.15
24	243.25	260	27	55	83	35	3.96
25	253.32	270	27	55	83	35	4.22
26	263.40	281	27	55	83	35	4.49
28	283.57	301	27	55	83	35	5.06
30	303.75	321	27	55	83	35	5.68

2062(t=11.7) P=38.10 W=12.70 Dr=22.23

齿数	节径 P.C.D	外径 Do	孔径d		凸台		重量 kg
			最小	最大	直径BD	总长BL	
10	123.30	140	19	55	80	45	2.50
11	135.24	153	19	55	83	45	2.60
12	147.21	165	19	55	83	45	2.80
13	159.20	177	26	55	83	45	3.10
14	171.22	190	26	55	83	45	3.60
15	183.25	202	26	55	83	45	3.90
16	195.29	214	26	55	83	45	4.20
18	219.41	239	26	63	93	45	5.00
20	243.55	263	26	63	93	45	6.00
24	291.90	312	27	63	93	45	7.28
25	303.99	324	27	63	93	45	7.77
26	316.09	337	27	63	93	45	8.77
28	340.29	361	27	63	93	45	9.90
30	364.50	385	27	63	93	45	11.20

2082(t=14.6) P=50.80 W=15.88 Dr=28.58

齿数	节径 P.C.D	外径 Do	孔径d		凸台		重量 kg
			最小	最大	直径BD	总长BL	
10	164.39	187	27	63	93	40	3.29
11	180.31	204	27	75	107	45	4.42
12	196.28	220	27	75	107	45	4.94
13	212.27	237	27	75	107	45	5.46
14	228.30	253	27	75	107	45	6.09
15	244.33	269	31	75	107	45	6.70
16	260.39	286	31	75	107	45	7.42
18	292.55	319	31	80	117	50	9.76
20	324.74	351	31	80	117	50	11.46
24	389.19	416	36	80	117	50	16.30
25	405.32	433	36	80	117	50	17.5
26	421.45	449	36	80	117	50	18.7
28	453.72	481	36	80	117	50	21.2
30	485.99	514	36	80	117	50	24.00

双节距滚子链链轮S型

Double pitch roller sprocket type S

这型号链轮为变切齿的双节距链轮。 2040($t=7.2$) $P=25.4$ $W=7.95$ $Dr=7.95$

此链轮齿数一定, 链轮每旋转一圈, 链条与相邻二齿中的一个齿啮合, 此齿数定义为“工作齿数”。在奇数齿情况下, 链轮转二圈, 使每个齿与链条啮合一次, 这样延长了链轮寿命。

This type of sprocket is a double pitch sprocket with variable teeth. The number of sprocket teeth, sprocket rotation, chain and the adjacent two teeth in a tooth meshing, the number of teeth defined as "Working teeth." In the case of odd-numbered teeth, the sprocket rotates two times so that each tooth meshes with the chain once, thus prolonging the sprocket life.

齿数	工作齿数	节径 P.C.D	外径 Do	孔径d		凸台		重量 Kg
				最小	最大	直径 BD	总长 BL	
15	7 ½	62.45	67	13	25	43	22	0.3
17	8 ½	70.31	76	14	32	52	22	0.42
19	9 ½	78.23	84	15	38	60	25	0.61
21	10 ½	86.17	92	15	46	69	25	0.82
23	11 ½	94.15	100	15	51	77	25	0.98
24	12	98.14	104	15	42	63	25	1.02
25	12 ½	102.14	108	15	42	63	25	0.83

2050($t=8.7$) $P=31.75$ $W=9.53$ $Dr=10.16$



齿数	工作齿数	节径 P.C.D	外径 Do	孔径d		凸台		重量 Kg
				最小	最大	直径 BD	总长 BL	
15	7 ½	78.06	84	13	32	54	25	0.55
17	8 ½	87.89	94	15	45	65	25	0.76
19	9 ½	97.78	105	15	48	73	28	1.06
21	10 ½	107.72	115	14	46	73	28	1.62
23	11 ½	117.68	125	17	48	73	28	1.27
24	12	122.67	130	17	48	73	28	1.40
25	12 ½	127.67	135	17	48	73	28	1.40

2060($t=11.7$) $P=38.10$ $W=12.70$ $Dr=11.91$

齿数	工作齿数	节径 P.C.D	外径 Do	孔径d		凸台		重量 Kg
				最小	最大	直径 BD	总长 BL	
15	7 ½	93.67	101	17	45	66	32	1.05
17	8 ½	105.47	113	17	48	73	32	1.33
19	9 ½	117.34	126	17	55	83	40	2.03
21	10 ½	129.26	138	17	55	83	40	2.23
23	11 ½	141.22	150	17	55	83	45	2.56
24	12	147.21	156	19	55	83	45	2.90
25	12 ½	153.20	162	19	55	83	45	2.81


2080($t=14.6$) $P=50.80$ $W=15.88$ $Dr=15.88$

齿数	工作齿数	节径 P.C.D	外径 Do	孔径d		凸台		重量 Kg
				最小	最大	直径 BD	总长 BL	
15	7 ½	124.90	135	21	60	88	40	2.34
17	8 ½	140.62	151	21	63	93	40	2.48
19	9 ½	156.45	167	21	63	93	40	3.24
21	10 ½	172.34	184	21	63	93	40	3.68
23	11 ½	188.29	200	27	75	107	45	4.88
24	12	196.28	208	27	75	107	45	5.30
25	12 ½	204.27	216	27	75	107	45	5.43

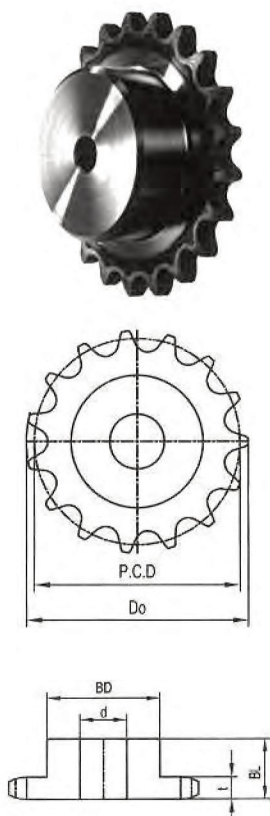

有效齿数为实际齿数的1/2
The effective number of teeth is
1/2 of the actual number of teeth


倍速链轮 Double Speed Sprocket

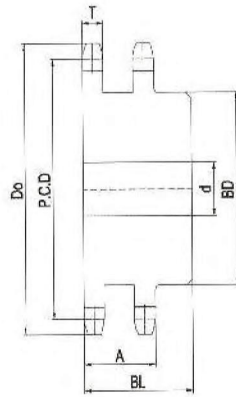

链号	链条节距	滚子直径
C3B	19.05mm	11.91mm
C4B	25.4mm	15.88mm
C5B	31.75mm	19.05mm
C6B	38.1mm	22.23mm


型号	齿数	节径 P.C.D	外径 Do	齿厚 T	孔径d		凸台直径 BD	总长 BL	排间距 A
					最小	最大			
C3B9N	9	55.70	62	3	10	21	33	22	15.3
C3B10N	10	61.65	68	3	13	23	37	25	15.3
C4B10N	10	82.20	93	4	16	33	52	40	21.5
C4B11	11	90.16	102	4	16	36	58	35	21.5
C4B12	12	98.14	110	4	16	41	65	35	21.5
C5B10N	10	102.75	117	5	16	41	66	45	27
C5B11	11	112.70	127	5	20	48	77	50	27
C5B12N	12	122.67	138	5	20	54	87	45	27
C6B10N	10	123.30	137	6	19	51	81	50	31
C6B11	11	135.24	150	6	20	50	80	50	31
C6B12	12	147.21	162	6	20	50	80	50	31

惰轮 Idler

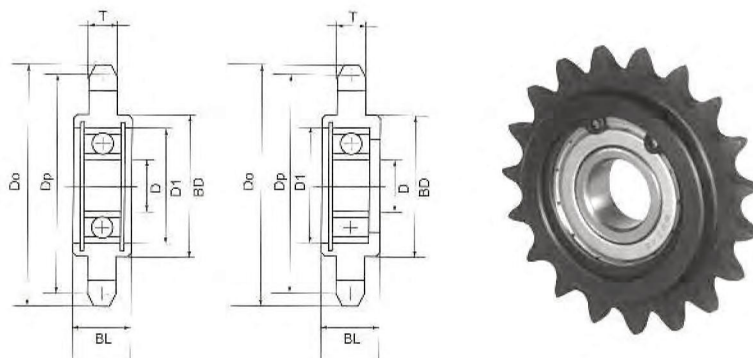


链号	齿数	轴承内径 D	链轮孔径 D1	外径 Do	分度圆直径 Dp	齿宽 T	轮毂 BD	总宽 BL	使用轴承	重量 Kg
25C	17	6	17	38	34.56	2.8	27	12	606ZZ	0.05
	19	8	22	42	38.58		31	13	608ZZ	0.05
	19	10	22	42	38.58		31	13	6900ZZ	0.06
	20	12	24	44	40.59		33	13	6901ZZ	0.08
35C	16	10	26	54	48.82	4.3	38	14	6000ZZ	0.11
		12	28						6001ZZ	0.10
	18	15	35	60	54.85		44	17	6202ZZ	0.16
	21	17	40	69	63.91		53	19	6203ZZ	0.24
	25	20	47	81	76.00		60	21	6204ZZ	0.33
40C	13	10	26	59	53.07	7.2	38	14	6000ZZ	0.15
		12	28						6001ZZ	0.14
	15	15	35	67	61.08		44	17	6202ZZ	0.19
	17	17	40	76	69.12		53	19	6203ZZ	0.30
	19	20	47	84	77.16		60	21	6204ZZ	0.40
50C	12	12	32	69	61.34	8.7	43	16	6201ZZ	0.21
	13	15	35	74	66.34		44	17	6202ZZ	0.23
	15	17	40	84	76.35		53	19	6203ZZ	0.37
	17	20	47	94	86.39		60	21	6204ZZ	0.49
60C	11	12	32	76	67.62	11.7	44	16	6201ZZ	0.26
		15	35					17	6202ZZ	0.27
	13	17	40	89	79.60		53	19	6203ZZ	0.46
	14	20	47	95	85.61		60	21	6204ZZ	0.56
80C	9	15	35	85	74.27	14.6	44	17	6202ZZ	0.38
	10	17	40	93	82.20		52	19	6203ZZ	0.57
	11	20	47	102	90.16		60	21	6204ZZ	0.69
06C	15	10	30	49.3	45.81	5.3	35	15	6200ZZ	0.11
	18	15	35	58.3	54.85		44	17	6202ZZ	0.17
	20	17	40	64.3	60.89		50	19	6203ZZ	0.24
08C	15	15	35	65.5	61.08	7.2	46	17	6202ZZ	0.20
	16	17	40	69.5	65.1		50	19	6203ZZ	0.25
	18	17	40	77.8	73.14		57	19	6203ZZ	0.25

双排惰轮B型 Double Idler Type B



链号	齿数	轴承内径 D	链轮孔径 D1	外径 Do	分度圆直径 Dp	齿宽 T	轮毂 BD	总宽 BL	使用轴承	重量 Kg
35B	16	10	26	54	48.82	4.3	38	22	6000ZZ	0.14
		12	28						6001ZZ	0.15
	18	15	35	60	54.85		44	28	6202ZZ	0.23
	21	17	40	69	63.91		53	31	6203ZZ	0.32
	25	20	47	81	76.00		60	35	6204ZZ	0.46
40B	13	10	26	59	53.07	7.2	38	22	6000ZZ	0.19
		12	28						6001ZZ	0.18
	15	15	35	67	61.08		44	28	6202ZZ	0.27
	17	17	40	76	69.12		53	31	6203ZZ	0.39
	19	20	47	84	77.16		60	35	6204ZZ	0.59
50B	12	12	32	69	61.34	8.7	43	26	6201ZZ	0.27
	13	15	35	74	66.34		44	28	6202ZZ	0.31
	15	17	40	84	76.35		53	31	6203ZZ	0.46
	17	20	47	94	86.39		60	35	6204ZZ	0.66
60B	11	12	32	76	67.62	11.7	44	26	6201ZZ	0.35
		15	35					28	6202ZZ	0.36
	13	17	40	89	79.60		53	31	6203ZZ	0.56
	14	20	47	95	85.61		60	35	6204ZZ	0.70
80B	9	15	35	85	74.27	14.6	44	28	6202ZZ	0.46
	10	17	40	93	82.20		53	31	6203ZZ	0.62
	11	20	47	102	90.16		60	35	6204ZZ	0.80
06C	15	10	30	49.3	45.81	5.3	35	22	6200ZZ	0.15
	18	15	35	58.3	54.85		44	28	6202ZZ	0.24
	20	17	40	64.3	60.89		50	32	6203ZZ	0.31
08C	15	15	35	65.5	61.08	7.2	46	28	6202ZZ	0.28
	16	15	40	69.5	65.1		50	32	6203ZZ	0.33
	18	17	40	77.8	73.14		57	32	6203ZZ	0.51

双排惰轮C型 Double Idler Type C

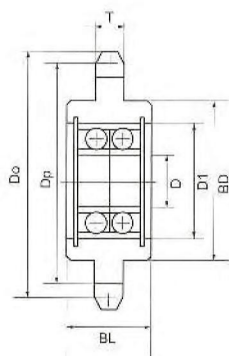

链号	齿数	轴承内径 D	链轮孔径 D1	外径 D0	分度圆直径 Dp	齿宽 T	轮毂 BD	总宽 BL	使用轴承	重量 Kg
35C	16	10	26	54	48.82	4.3	38	22	6000ZZ	0.13
		12	28						6001ZZ	0.12
	18	15	35	60	54.85		44	28	6202ZZ	0.21
	21	17	40	69	63.91		53	31	6203ZZ	0.31
	25	20	47	81	76.00		60	35	6204ZZ	0.44
40C	13	10	26	59	53.07	7.2	38	22	6000ZZ	0.17
		12	28						6001ZZ	0.16
	15	15	35	67	61.08		44	28	6202ZZ	0.25
	17	17	40	76	69.12		53	31	6203ZZ	0.37
	19	20	47	84	77.16		60	35	6204ZZ	0.51
50C	12	12	32	69	61.34	8.7	43	26	6201ZZ	0.25
	13	15	35	74	66.34		44	28	6202ZZ	0.28
	15	17	40	84	76.35		53	31	6203ZZ	0.44
	17	20	47	94	86.39		60	35	6204ZZ	0.60
60C	11	12	32	76	67.62	11.7	44	26	6201ZZ	0.30
		15	35					28	6202ZZ	0.32
	13	17	40	89	79.60		53	31	6203ZZ	0.53
	14	20	47	95	85.61		60	35	6204ZZ	0.67
80C	9	15	35	85	74.27	14.6	44	28	6202ZZ	0.43
	10	17	40	93	82.20		52	31	6203ZZ	0.64
	11	20	47	102	90.16		60	35	6204ZZ	0.80
06C	15	10	30	49.3	45.81	5.3	35	22	6200ZZ	0.15
	18	15	35	58.3	54.85		44	28	6202ZZ	0.24
	20	17	40	64.3	60.89		50	32	6203ZZ	0.31
08C	15	15	35	65.5	61.08	7.2	46	28	6202ZZ	0.28
	16	15	40	69.5	65.1		50	32	6203ZZ	0.33
	18	17	40	77.8	73.14		57	32	6203ZZ	0.51


输送链链轮 Conveyor sprocket



STYLE R.F




STYLE S




TYPE A TYPE B TYPE C

R 滚子用输送链轮 R roller conveyor sprocket

链号	链条节距	滚子直径	链条内宽
S3075R	75	31.8	16.1
S3100R	100		
S5100R	100		
S5150R	150		
S10100R	100	40	22.2
S10150R	150		
		50	30



S1




S2
pitch

链号	齿数	基本尺寸、形状				通用基本规格尺寸					
		节径Dp	外径Do	齿宽T	齿部形状	库存孔径d	孔径范围d(MAX)	凸台直径BD	总长BL	中心距离L(CW)型	重量kg
S3075R	6	150	158	12	S1	20	50	73	57	28.5	3
	8	196	209			20	55	83	62	31	4.8
	10	242.7	259			20	60	93	67	33.5	7.1
	12	289.8	308			20	60	93	67	33.5	9
S3100R	6	200	206	12	S2	20	55	83	62	31	4.9
	8	261.3	272		S1	20	60	93	67	33.5	7.8
	10	323.6	336		S1	20	65	98	72	36	11.1
	12	386.4	401		S1	20	65	98	72	36	14.4
S5100R	6	200	205	18	S2	26	75	107	86	43	8.8
	8	261.3	272		S1	26	75	107	86	43	12
	10	323.6	340		S1	26	80	117	94	47	17.4
	12	386.4	405		S1	26	85	127	104	52	24.4
S5150R	6	300	304	18	S2	26	80	117	94	47	15.8
	8	392	402		S2	26	85	127	104	52	24.9
	10	485.4	500		S2	26	95	137	116	58	36.7
	12	579.6	596		S1	26	95	137	116	58	47.8
S10100R	6	200	214	22	S2	30	75	107	90	45	9.8
	8	261.3	282		S1	30	85	127	108	54	17.1
	10	323.6	349		S1	30	95	137	120	60	24.7
	12	386.4	414		S1	30	100	147	123	61.5	32.6
S10150R	6	300	309	22	S2	30	95	137	120	60	22.7
	8	392	408		S2	30	100	147	123	61.5	33.2
	10	485.4	506		S1	30	110	157	133	66.5	47.6
	12	579.6	601		S1	30	115	167	144	72	65.2

输送链链轮 Conveyor sprocket

F 滚子用输送链轮 F roller conveyor sprocket

链号	链条节距	滚子直径	链条内宽
S3075F	75	31.8	16.1
S3100F	100		
S5100F	100		
S5150F	150	40	22.2
S10150F	150		




TYPE A TYPE B TYPE C

链号	齿数	基本尺寸、形状				通用基本规格尺寸					
		节径Dp	外径Do	齿宽T	齿部形状	库存孔径d	孔径范围d(MAX)	凸台直径BD	总长BL	中心距离L(CW)型	重量kg
S3075F	6	150	158	9	S1	20	50	73	54	27	2.6
	8	196	209			20	55	83	59	29.5	4.1
	10	242.7	259			20	60	93	64	32	6
	12	289.8	308			20	60	93	64	32	7.4
S3100F	6	200	206	9	S2	20	55	83	59	29.5	4.2
	8	261.3	272		S2	20	60	93	64	32	6.5
	10	323.6	336		S1	20	65	98	69	34.5	9.2
	12	386.4	401		S1	20	65	98	69	34.5	11.6
S5100F	6	200	205	12	S1	26	75	107	80	40	7.3
	8	261.3	272			26	75	107	80	40	9.4
	10	323.6	340			26	80	117	88	44	13.5
	12	386.4	405			26	85	127	98	49	18.8
S5150F	6	300	304	12	S2	26	80	117	88	44	12.4
	8	392	402			26	85	127	98	49	19.2
	10	485.4	500			26	95	137	110	55	27.9
	12	579.6	596			26	95	137	110	55	35.2
S10150F	6	300	309	16	S2	30	95	137	113	56.5	18.9
	8	392	408		S2	30	100	147	116	58	26.6
	10	485.4	506		S2	30	110	157	126	63	37.5
	12	579.6	601		S1	30	115	167	137	68.5	50.8

S 滚子用输送链轮 S roller conveyor sprocket

链号	链条节距	滚子直径	链条内宽
S3075S	75	15.9	16.1
S3100S	100		
S5075S	75		
S5100S	100	22.2	22.2
S5150S	150		
S10100S	100	30	30
S10150S	150		




TYPE A TYPE B TYPE C


链号	齿数	基本尺寸、形状				通用基本规格尺寸					
		节径Dp	外径Do	齿宽T	齿部形状	库存孔径d	孔径范围d(MAX)	凸台直径BD	总长BL	中心距离L(CW)型	重量kg
S3075S	6	150	158	12	S1	20	50	73	57	28.5	3
	8	196	206			20	55	83	62	31	4.8
	10	242.7	252			20	60	93	67	33.5	7.1
	12	289.8	299			20	60	93	67	33.5	9
S3100S	6	200	210	12	S2	20	55	83	62	31	4.9
	8	261.3	269		S1	20	60	93	67	33.5	7.8
	10	323.6	333		S1	20	65	98	72	36	11.1
	12	386.4	396		S1	20	65	98	72	36	14.4
S5075S	8	196	209	18	S1	26	75	107	86	43	8.6
	10	242.7	256			26	75	107	86	43	10.9
	12	289.8	303			26	80	117	94	47	15.1
	12	289.8	303			26	80	117	94	47	15.1
S5100S	6	200	212	18	S2	26	75	107	86	43	8.8
	8	261.3	273		S1	26	75	107	86	43	12
	10	323.6	337		S1	26	80	117	94	47	17.4
	12	386.4	400		S1	26	85	127	104	52	24.4
S5150S	6	300	310	18	S2	26	80	117	94	47	15.8
	8	392	405		S2	26	85	127	104	52	24.9
	10	485.4	499		S2	26	95	137	116	58	36.7
	12	579.6	592		S1	26	95	137	116	58	47.8
S10100S	6	200	217	22	S2	30	75	107	90	45	9.8
	8	261.3	279		S1	30	85	127	108	54	17.7
	10	323.6	341		S1	30	95	137	120	60	24.7
	12	386.4	404		S1	30	100	147	123	61.5	32.6
S10150S	6	300	316	22	S2	30	95	137	120	60	22.7
	8	392	409		S2	30	100	147	123	61.5	33.2
	10	485.4	503		S1	30	110	157	133	66.5	47.6
	12	579.6	597		S1	30	115	167	144	72	65.2

正齿轮 Spur Gears

压力角 Pressure angle 20°



TYPE A



TYPE B



材质: C45

正齿轮 Spur gear

模数 Module=1

齿轮编号	Z	外径 Do	节径 Dp	孔径 d	凸台 BD	T	总长 BL	形状	重量 Kg
M1B 15	15	17	15	8	17	10	30	A	0.03
M1B 16	16	18	16	8	18				0.04
M1B 17	17	19	17	8	19				0.05
M1B 18	18	20	18	8	20				0.05
M1B 19	19	21	19	8	21				0.06
M1B 20	20	22	20	8	16	10	20	B	0.03
M1B 21	21	23	21	8	17				0.03
M1B 22	22	24	22	8	18				0.04
M1B 23	23	25	23	8	18				0.04
M1B 24	24	26	24	8	20				0.05
M1B 25	25	27	25	8	20	10	20	B	0.05
M1B 26	26	28	26	8	22				0.06
M1B 27	27	29	27	8	22				0.06
M1B 28	28	30	28	8	22				0.07
M1B 29	29	31	29	8	24				0.08
M1B 30	30	32	30	10	25	10	20	B	0.08
M1B 32	32	34	32	10	26				0.1
M1B 34	34	36	34	10	26				0.11
M1B 35	35	37	35	10	26				0.11
M1B 36	36	38	36	10	28				0.12
M1B 38	38	40	38	10	32	10	20	B	0.14
M1B 40	40	42	40	10	35				0.16
M1B 42	42	44	42	10	35				0.17
M1B 45	45	47	45	10	35				0.18
M1B 46	46	48	46	10	35				0.19
M1B 48	48	50	48	10	35	10	20	B	0.2
M1B 50	50	52	50	10	35				0.22

模数 Module=1.5


齿轮编号	Z	外径 Do	节径 Dp	孔径 d	凸台 BD	T	总长 BL	形状	重量 Kg
M1.5B 12	12	21	18	8	21	15	30	A	0.05
M1.5B 13	13	22.5	19.5	8	22.5				0.07
M1.5B 14	14	24	21	8	16				0.06
M1.5B 15	15	25.5	22.5	8	18	15	25	B	0.06
M1.5B 16	16	27	24	8	20				0.07
M1.5B 17	17	28.5	25.5	8	21				0.09
M1.5B 18	18	30	27	8	22				0.09
M1.5B 19	19	31.5	28.5	8	23				0.11
M1.5B 20	20	33	30	8	24	15	25	B	0.12
M1.5B 21	21	34.5	31.5	8	25				0.13
M1.5B 22	22	36	33	8	26				0.15
M1.5B 23	23	37.5	34.5	8	27				0.18
M1.5B 24	24	39	36	8	28				0.19
M1.5B 25	25	40.5	37.5	8	30	15	25	B	0.2
M1.5B 26	26	42	39	10	32				0.21
M1.5B 27	27	43.5	40.5	10	34				0.23
M1.5B 28	28	45	42	10	36				0.24
M1.5B 29	29	46.5	43.5	10	37				0.25
M1.5B 30	30	48	45	10	38	15	25	B	0.26
M1.5B 32	32	51	48	10	40				0.3
M1.5B 34	34	54	51	10	40				0.33
M1.5B 35	35	55.5	52.5	10	42				0.34
M1.5B 36	36	57	54	10	45				0.39
M1.5B 38	38	60	57	12	45	15	25	B	0.43
M1.5B 40	40	63	60	12	45				0.44
M1.5B 42	42	66	63	12	45				0.47
M1.5B 44	44	69	66	12	45				0.51
M1.5B 45	45	70.5	67.5	12	45				0.52
M1.5B 46	46	72	69	12	45	15	25	B	0.57
M1.5B 48	48	75	72	12	45				0.58
M1.5B 50	50	78	75	12	45				0.62

正齿轮 Spur gear

模数 Module=2

正齿轮 Spur Gears

压力角 Pressure angle 20°



TYPE B

齿轮编号	Z	外径 Do	节径 Dp	孔径 d	凸台 BD	T	总长 BL	形状	重量 Kg
M2B 12	12	28	24	10	18	20	30	B	0.09
M2B 13	13	30	26	10	20				0.1
M2B 14	14	32	28	10	20				0.1
M2B 15	15	34	30	12	24				0.11
M2B 16	16	36	32	12	26				0.15
M2B 17	17	38	34	12	28	20	30	B	0.18
M2B 18	18	40	36	12	30				0.2
M2B 19	19	42	38	12	31				0.22
M2B 20	20	44	40	12	32				0.22
M2B 21	21	46	42	12	34				0.28
M2B 22	22	48	44	12	36	20	30	B	0.3
M2B 23	23	50	46	12	37				0.32
M2B 24	24	52	48	12	38				0.35
M2B 25	25	54	50	12	40				0.4
M2B 26	26	56	52	12	42				0.42
M2B 27	27	58	54	12	45	20	30	B	0.47
M2B 28	28	60	56	12	45				0.5
M2B 29	29	62	58	12	47				0.58
M2B 30	30	64	60	12	50				0.58
M2B 32	32	68	64	12	50				0.64
M2B 34	34	72	68	12	50	20	30	B	0.74
M2B 35	35	74	70	12	52				0.75
M2B 36	36	76	72	12	55				0.8
M2B 38	38	80	76	12	55				0.9
M2B 40	40	84	80	15	55				0.93
M2B 42	42	88	84	15	55	20	30	B	1
M2B 44	44	92	88	15	55				1.1
M2B 45	45	94	90	15	55				1.1
M2B 46	46	96	92	15	55				1.2
M2B 48	48	100	96	15	55				1.3
M2B 50	50	104	100	15	55				1.4

模数 Module=2.5




材质: C45

齿轮编号	Z	外径 Do	节径 Dp	孔径 d	凸台 BD	T	总长 BL	形状	重量 Kg
M2.5B 12	12	35	30	12	23	25	37	B	0.14
M2.5B 13	13	37.5	32.5	12	25				0.17
M2.5B 14	14	40	35	12	25				0.2
M2.5B 15	15	42.5	37.5	15	30				0.23
M2.5B 16	16	45	40	15	32				0.25
M2.5B 17	17	47.5	42.5	15	35	25	37	B	0.28
M2.5B 18	18	50	45	15	38				0.35
M2.5B 19	19	52.5	47.5	15	39				0.4
M2.5B 20	20	55	50	15	40				0.44
M2.5B 21	21	57.5	52.5	15	42				0.49
M2.5B 22	22	60	55	15	44	25	37	B	0.53
M2.5B 23	23	62.5	57.5	15	46				0.58
M2.5B 24	24	65	60	15	48				0.65
M2.5B 25	25	67.5	62.5	15	50				0.7
M2.5B 26	26	70	65	15	55				0.83
M2.5B 27	27	72.5	67.5	15	60	25	37	B	0.92
M2.5B 28	28	75	70	15	60				1
M2.5B 29	29	77.5	72.5	15	62				1.1
M2.5B 30	30	80	75	15	65				1.2
M2.5B 32	32	85	80	15	70				1.3
M2.5B 34	34	90	85	15	70	25	37	B	1.4
M2.5B 35	35	92.5	87.5	15	70				1.5
M2.5B 36	36	95	90	15	70				1.6
M2.5B 38	38	100	95	20	70				1.7
M2.5B 40	40	105	100	20	70				1.8
M2.5B 42	42	110	105	20	70	25	37	B	2
M2.5B 44	44	115	110	20	70				2.1
M2.5B 45	45	117.5	112.5	20	70				2.2
M2.5B 46	46	120	115	20	70				2.3
M2.5B 48	48	125	120	20	70				2.5
M2.5B 50	50	130	125	20	70				2.7

正齿轮 Spur gear

正齿轮 Spur Gears

压力角 Pressure angle 20°



TYPE B

模数 Module=3

齿轮编号	Z	外径 Do	节径 Dp	孔径 d	凸台 BD	T	总长 BL	形状	重量 Kg
M3B 12	12	42	36	15	28	30	45	B	0.25
M3B 13	13	45	39	15	30				0.3
M3B 14	14	48	42	15	32				0.35
M3B 15	15	51	45	15	36				0.4
M3B 16	16	54	48	15	38				0.5
M3B 17	17	57	51	15	39	30	45	B	0.65
M3B 18	18	60	54	15	40				0.67
M3B 19	19	63	57	15	45				0.73
M3B 20	20	66	60	15	50				0.8
M3B 21	21	69	63	15	52				1
M3B 22	22	72	66	15	54	30	45	B	1.1
M3B 23	23	75	69	15	56				1.1
M3B 24	24	78	72	15	58				1.2
M3B 25	25	81	75	20	60				1.3
M3B 26	26	84	78	20	65				1.5
M3B 27	27	87	81	20	65	30	45	B	1.6
M3B 28	28	90	84	20	70				1.7
M3B 29	29	93	87	20	70				1.7
M3B 30	30	96	90	20	75				1.8
M3B 32	32	102	96	20	75				2.1
M3B 34	34	108	102	20	80	30	45	B	2.4
M3B 35	35	111	105	20	80				2.5
M3B 36	36	114	108	20	80				2.6
M3B 38	38	120	114	25	80				3
M3B 40	40	126	120	25	80				3.1



材质: C45


模数 Module=4

齿轮编号	Z	外径 Do	节径 Dp	孔径 d	凸台 BD	T	总长 BL	形状	重量 Kg
M4B 12	12	56	48	20	35	40	60	B	0.55
M4B 13	13	60	52	20	38				0.67
M4B 14	14	64	56	20	40				0.8
M4B 15	15	68	60	20	45				0.95
M4B 16	16	72	64	20	50				1.1
M4B 17	17	76	68	20	53	40	60	B	1.3
M4B 18	18	80	72	20	55				1.5
M4B 19	19	84	76	20	60				1.7
M4B 20	20	88	80	20	65				1.9
M4B 21	21	92	84	20	69				2.2
M4B 22	22	96	88	20	73	40	60	B	2.4
M4B 23	23	100	92	20	77				2.6
M4B 24	24	104	96	20	80				2.9
M4B 25	25	108	100	20	84				3.2
M4B 26	26	112	104	20	87				3.5
M4B 27	27	116	108	20	90	40	60	B	3.8
M4B 28	28	120	112	20	95				4.2
M4B 29	29	124	116	20	95				4.4
M4B 30	30	128	120	20	100				4.5
M4B 32	32	136	128	22	100				4.8
M4B 34	34	144	136	22	100	40	56	B	5.5
M4B 35	35	148	140	22	100				5.6
M4B 36	36	152	144	22	100				5.7
M4B 38	38	160	152	22	100				7.1
M4B 40	40	168	160	25	100				7.2

正齿轮 Spur gear

正齿轮 Spur Gears

压力角 Pressure angle 20°



TYPE B

模数 Module=5

齿轮编号	Z	外径 Do	节径 Dp	孔径 d	凸台 BD	T	总长 BL	形状	重量 Kg
M5B 12	12	70	60	22	46	50	75	B	1.2
M5B 13	13	75	65	22	50				1.5
M5B 14	14	80	70	22	52				1.7
M5B 15	15	85	75	22	60				2
M5B 16	16	90	80	22	65				2.3
M5B 17	17	95	85	22	68	50	75	B	2.6
M5B 18	18	100	90	22	70				2.9
M5B 19	19	105	95	22	76				3.5
M5B 20	20	110	100	22	82				3.8
M5B 21	21	115	105	25	90				4.4
M5B 22	22	120	110	25	95	50	75	B	4.8
M5B 23	23	125	115	25	100				5.5
M5B 24	24	130	120	25	100				5.7
M5B 25	25	135	125	25	105				6.4
M5B 26	26	140	130	25	110				6.6
M5B 27	27	145	135	25	110	50	75	B	7.6
M5B 28	28	150	140	25	110				8
M5B 29	29	155	145	25	115				8.2
M5B 30	30	160	150	25	120				8.8
M5B 32	32	170	160	30	120	50	71	B	9.8
M5B 34	34	180	170	30	120				11.8
M5B 35	35	185	175	30	120				12
M5B 36	36	190	180	30	120				12
M5B 38	38	200	190	30	120				14
M5B 40	40	210	200	30	120				13



材质: C45


模数 Module=6

齿轮编号	Z	外径 Do	节径 Dp	孔径 d	凸台 BD	T	总长 BL	形状	重量 Kg
M6B12	12	84	72	25	55	60	88	B	2
M6B13	13	90	78	25	58				2.5
M6B14	14	96	84	25	60				2.8
M6B15	15	102	90	25	70				3.4
M6B16	16	108	96	25	75				3.9
M6B17	17	114	102	25	78	60	88	B	4.4
M6B18	18	120	108	25	80				5
M6B19	19	126	114	25	90				5.8
M6B20	20	132	120	25	100				6.5
M6B21	21	138	126	28	105				7.5
M6B22	22	144	132	28	110	60	88	B	8.1
M6B23	23	150	138	28	115				8.9
M6B24	24	156	144	28	120				9.8
M6B25	25	162	150	28	125				10.5
M6B26	26	168	156	28	130				11.4
M6B27	27	174	162	28	135	60	88	B	12.1
M6B28	28	180	168	28	140				12.7
M6B30	30	192	180	30	150				15.1
M6B32	32	204	192	30	150				18
M6B34	34	216	204	30	150				19
M6B35	35	222	210	30	150	60	83	B	19
M6B36	36	228	216	30	150				22
M6B38	38	240	228	30	150				23
M6B40	40	252	240	30	150				24
M6B46	46	288	276	40	180				31.6

伞齿轮 Bevel gear

伞齿轮 Bevel Gears

压力角 Pressure angle 20°

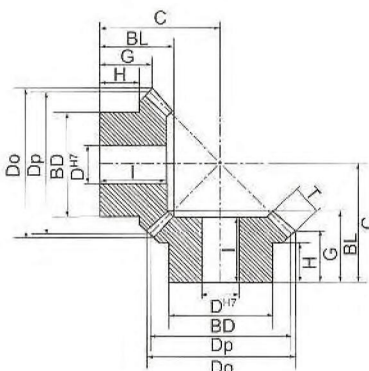

材质: C45

等径伞齿轮编号	M	齿数	孔径 D_{H7}	凸台 BD	外径 Do	节径 Dp	组装距离 C	总长 BL	齿顶距离 G	凸台长度 H	孔长度 I	齿宽 T	咬合面径 K	重量 Kg
KM1-20	1	20	6	16	21.41	20	20	13.94	10.71	8	12	5	9.86	0.02
KM1-25	1	25	6	20	26.41	25	23	15.16	11.21	8	14	6	15.03	0.04
KM1-30	1	30	8	24	31.41	30	28	17.71	13.71	10	16	6	19.03	0.06
KM1.5-20	1.5	20	8	26	32.12	30	30	21.24	16.06	13	19	8	15.378	0.07
KM1.5-25	1.5	25	10	30	39.62	37.5	34	22.25	16.31	11.5	19	9	19.54	0.11
KM1.5-30	1.5	30	10	36	47.12	45	43	28.24	21.56	16	25	10	25.7	0.21
KM2-20	2	20	12	34	42.83	40	37	24.89	18.41	14	22	10	21.72	0.15
KM2-25	2	25	12	40	52.83	50	40	24.33	16.41	10	20	12	26.06	0.22
KM2-30	2	30	12	45	62.83	60	50	29.42	21.41	12.5	25	12	36.07	0.37
KM2.5-20	2.5	20	14	42	53.34	50	48	32.54	24.77	19	29	12	28.06	0.3
KM2.5-25	2.5	25	16	50	66.04	62.5	50	30.41	20.52	12.5	26	15	34.57	0.42
KM2.5-30	2.5	30	16	60	78.54	75	62	36.28	26.27	17	32	15	47.57	0.76
KM3-20	3	20	16	50	64.24	60	58	39.84	30.12	23	35	15	31.567	0.53
KM3-25	3	25	20	60	79.24	75	60	37.81	24.62	15	32	20	37.44	0.74
KM3-30	3	30	20	70	94.24	90	75	45.47	32.12	20	40	20	53.43	1.32
KM3.5-20	3.5	20	20	60	74.95	70	65	44.13	32.47	25	40	18	39.1	0.82
KM3.5-25	3.5	25	25	70	92.45	87.5	70	43.23	28.72	17.5	37	22	46.77	1.15
KM3.5-30	3.5	30	25	90	109.95	105	85	49.66	34.97	25	45	22	67.77	2.2
KM4-20	4	20	20	64	85.65	80	75	50.78	37.83	27	45	20	43.436	1.15
KM4-25	4	25	28	80	105.66	100	80	49.32	32.83	20	43	25	55.29	1.73
KM4-30	4	30	28	100	125.66	120	95	54.52	37.83	25	50	25	79.28	3.09



HANGZHOU BAIQUAN ELECTROMECHANICAL CO., LTD.

WhatsApp: +86-13758194294

Email: biz@cnspeedway.com

Website: <https://agricparts.com/>

**Add: Room 207, Building 3, No.100 Chunchao Road, Economic And Technological
Development Zone, Hangzhou, Zhejiang, China**