

HANGZHOU BAIQUAN ELECTROMECHANICAL CO.,LTD.

ADD: ROOM 207, BUILDING 3, NO.100 CHUNCHAO ROAD, ECONOMIC AND TECHNOLOGICAL DEVELOPMENT ZONE,
HANGZHOU, ZHEJIANG, CHINA
EMAIL: BIZ@CNSPEEDWY.COM

WEB SITE: [HTTPS://AGRICPARTS.COM/](https://agricparts.com/)
WHATSAPP: +86-13758194294





AGRICULTURAL MACHINERY **GEARBOX**

APPLICATION


Its products are used in a variety of applications, like farm mower, snow sweeper, fertilizer applicator, grain conveyor, industrial equipment, petroleum mining machinery, ship industry equipment, and engineering hydraulic components,

The gearbox has low noise and stable operation. It is made of nodular cast iron with strong toughness and long service life.



Gears and shafts are quenched and have high surface hardness.

Each gearbox can be delivered after passing the inspection.

Use high-quality oil seals and bearings

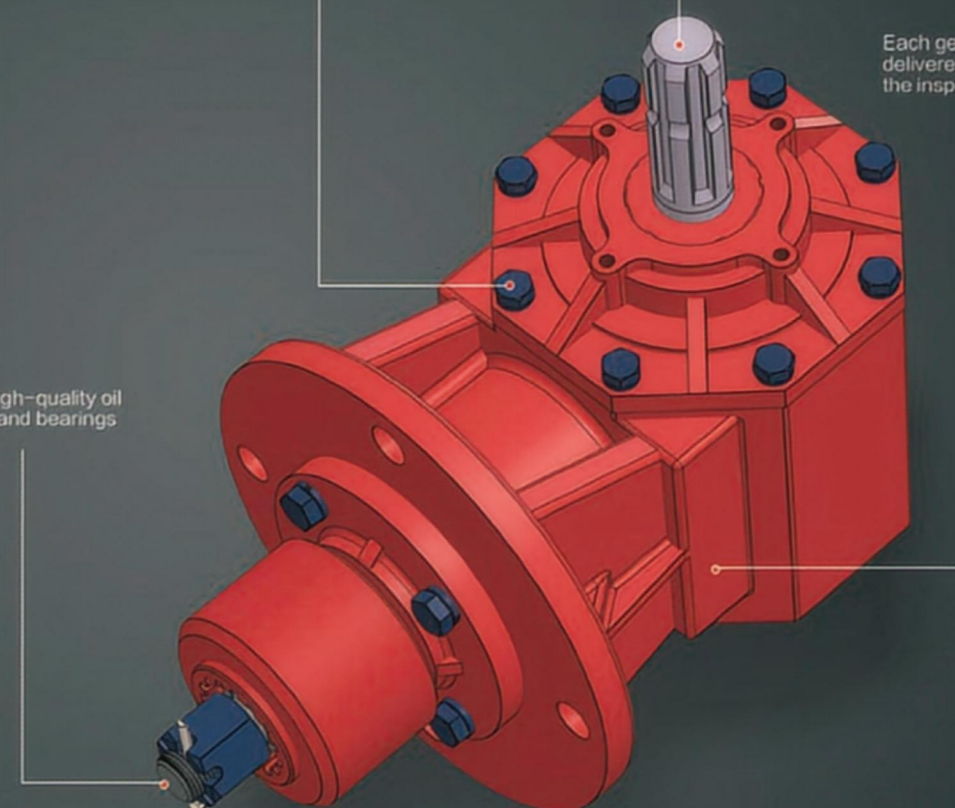

ROTARYCUTTER GEARBOX

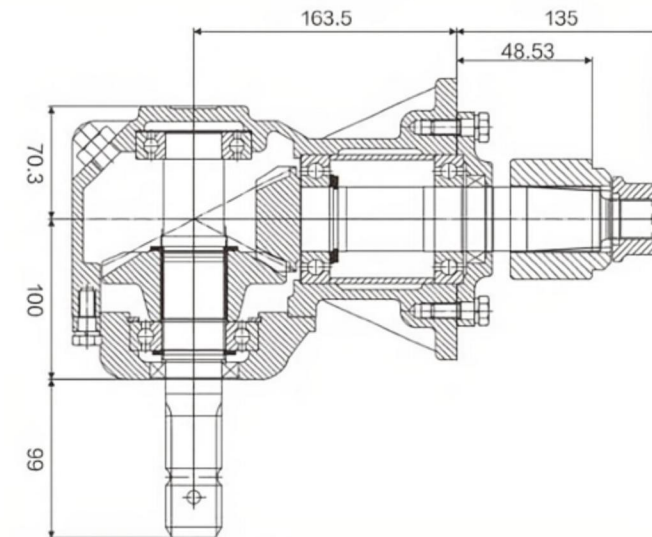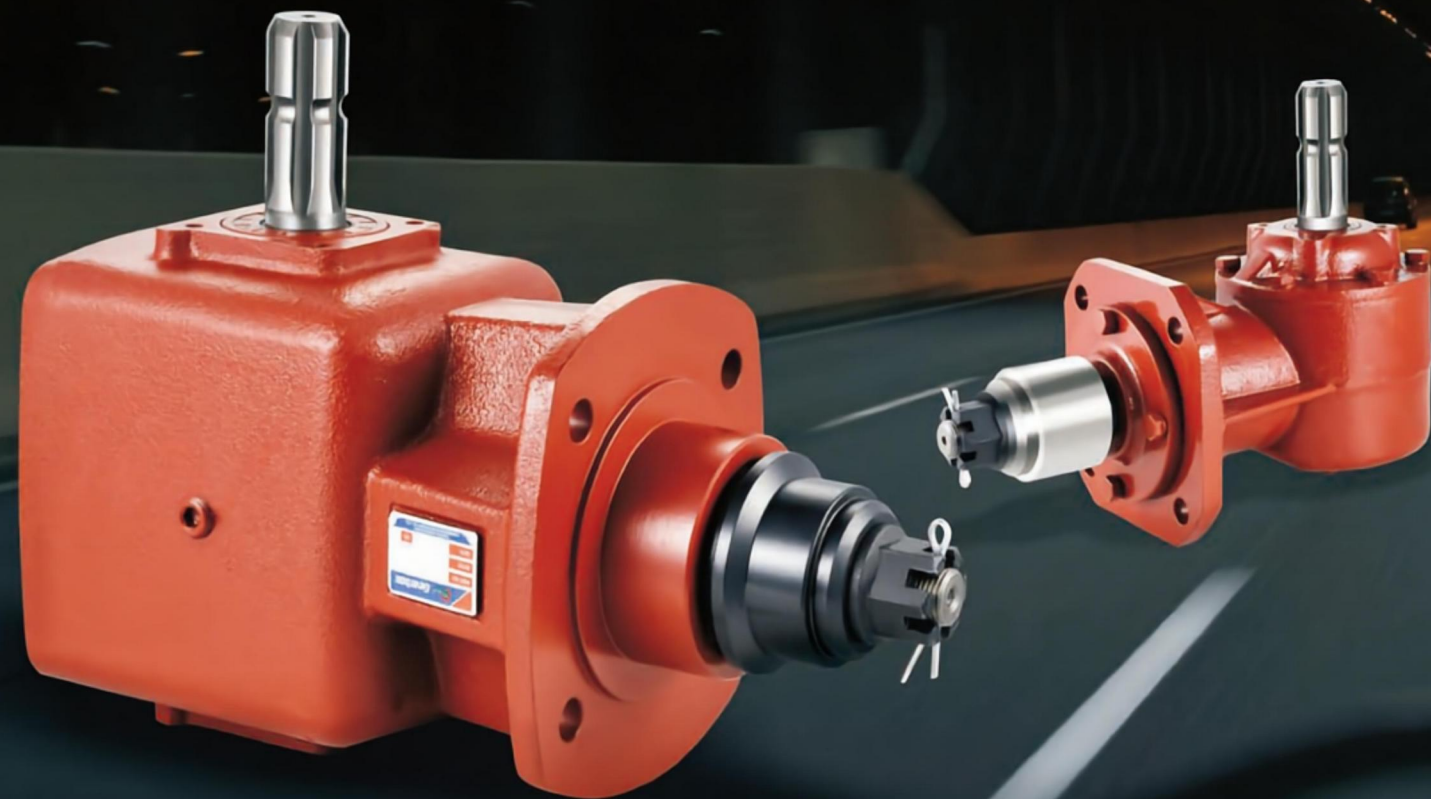


PRODUCT PARAMETERS

ITEM	HC-RC31
Ratio	1:1.46 / 1:1.69 / 1:1.93 / 1:2.3
Teeth	22/15 / 22/13 / 29/15 / 28/12
Module	5.08/5.0 / 4.0 / 4.0
Power(HP)	30
Rated Input	540 rpm
Input/Output Description	13/8 Z6/ Optic axis /Taper spline
Weight(N.W)	21.5Kg



HC-RC31

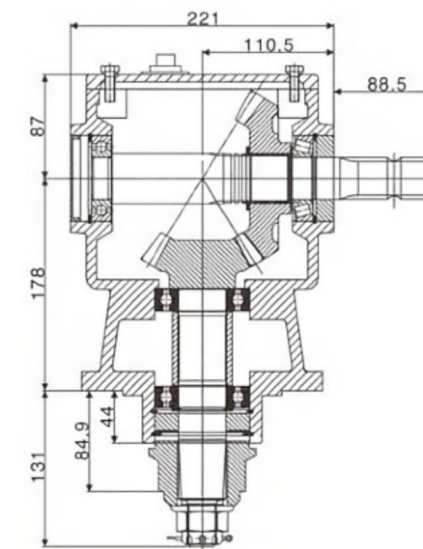


PRODUCT PARAMETERS

ITEM	HC-55
Ratio	1:1.6 / 1:1.93 / 1:2.83
Teeth	24/15 / 27/14 / 34/12
Module	6.0 / 5.64 / 4.5
Power(HP)	60
Rated Input	540 rpm
Input/Output Description	13/8 Z6/ Taper spline
Weight(N.W)	29Kg



HC-55

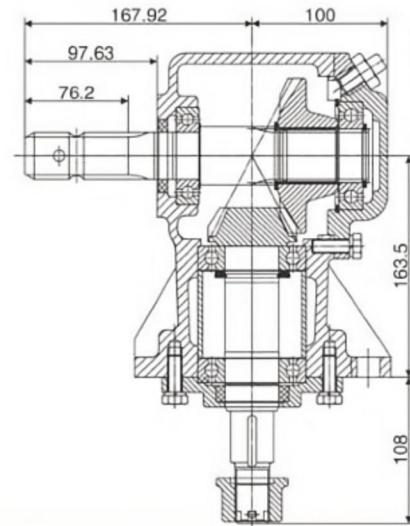


PRODUCT PARAMETERS

ITEM	HC-RC30-193
Ratio	1:1.93
Teeth	29/15
Module	4.0
Power(HP)	30
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6
Weight(N.W)	24Kg



HC-RC30-193

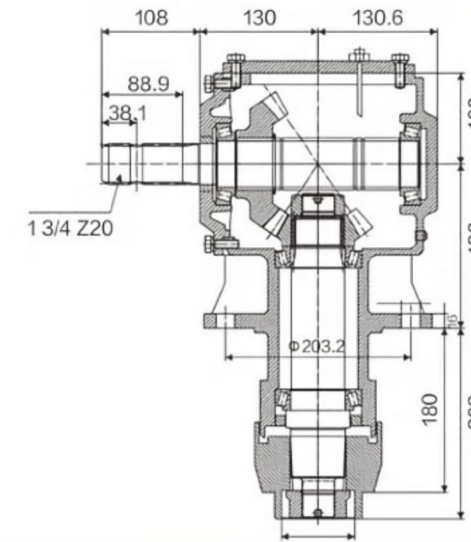


PRODUCT PARAMETERS

ITEM	HC-RC130-146 / HC-RC130-192
Ratio	1:1.46 / 1:1.92
Teeth	19/13 / 27/14
Module	6 / 8
Power(HP)	130 / 100
Rated Input	540 rpm
Input/Output Description	1 3/4 Z20 / Taper spline
Weight(N.W)	56Kg




HC-RC130-146

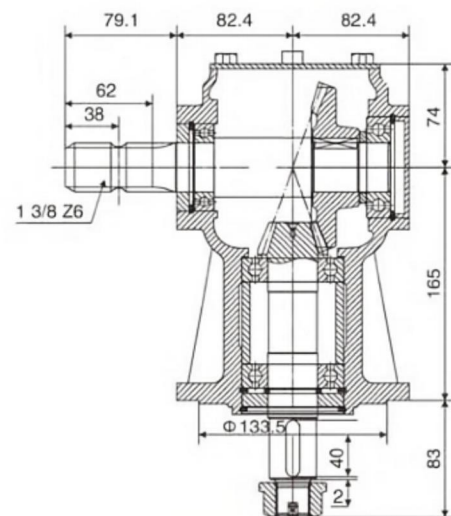


PRODUCT PARAMETERS

ITEM	HC-LF211
Ratio	1:2.83
Teeth	34/12
Module	3.36
Power(HP)	20
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Optic axis
Weight(N.W)	14.5Kg

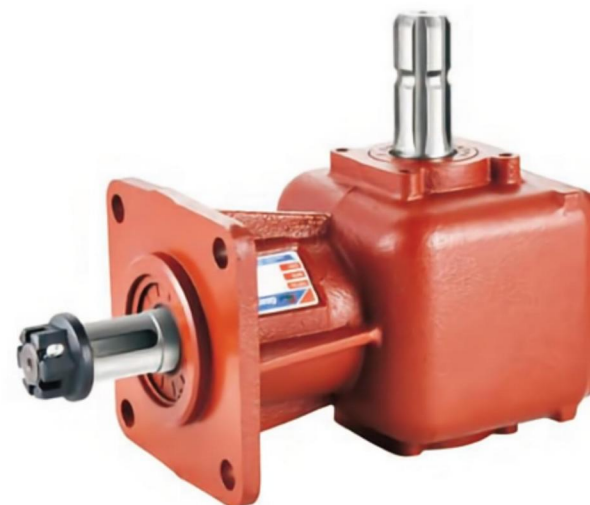


HC-LF211

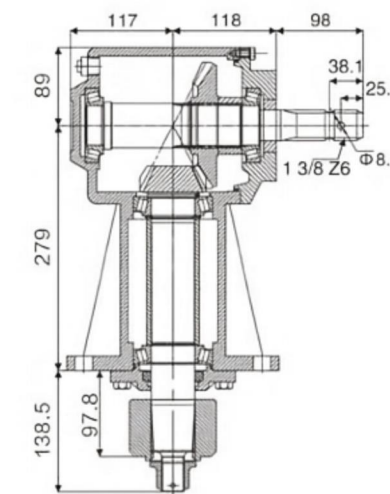


PRODUCT PARAMETERS

ITEM	HC-RC81
Ratio	1:1.93 / 1:146
Teeth	27/14 / 19/13
Module	5.5 / 7.0
Power(HP)	80
Rated Input	600 rpm
Input/Output Description	1 3/8 Z6 Taper spline
Weight(N.W)	17Kg

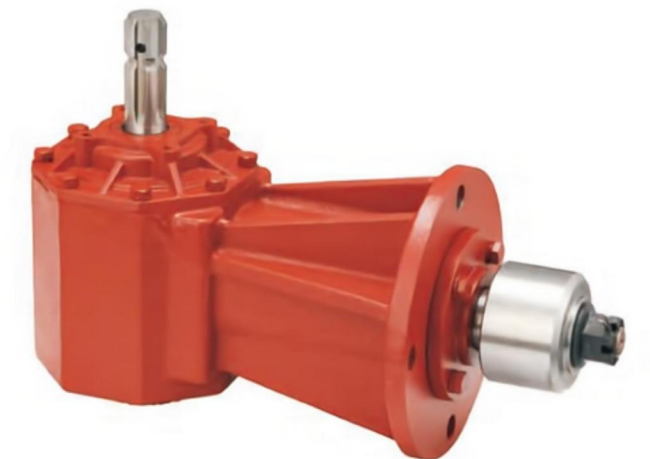

HC-RC81

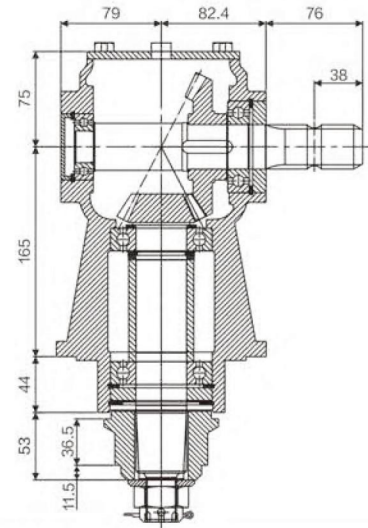


PRODUCT PARAMETERS

ITEM	HC-LF205
Ratio	1:1.46 / 1:1.93
Teeth	22/15 / 23/12
Module	5.0 / 5.0
Power(HP)	30
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 / Optic axis Taper spline
Weight(N.W)	19Kg



HC-LF205

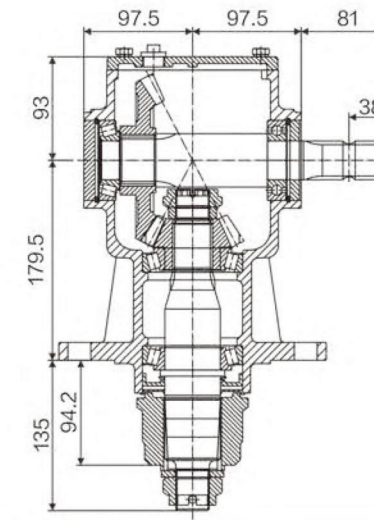


PRODUCT PARAMETERS

ITEM	HC-140
Ratio	1:1.5 / 1:1.93
Teeth	21/14 / 27/14
Module	5.7 / 5.64
Power(HP)	60
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Taper spline
Weight(N.W)	30Kg




HC-140

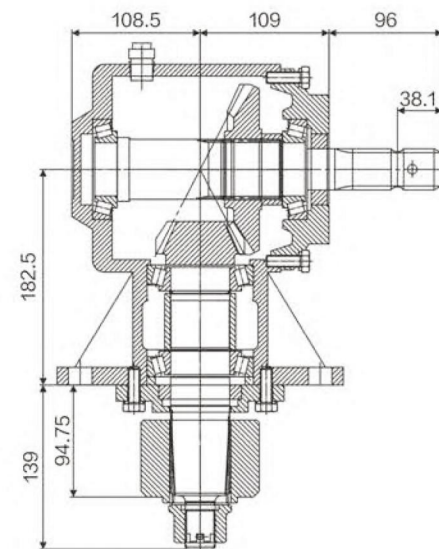


PRODUCT PARAMETERS

ITEM	HC-RC61
Ratio	1:1.46 / 1:1.93
Teeth	19/13 / 27/14
Module	7.0 / 5.5
Power(HP)	60
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Taper spline
Weight(N.W)	36.5Kg

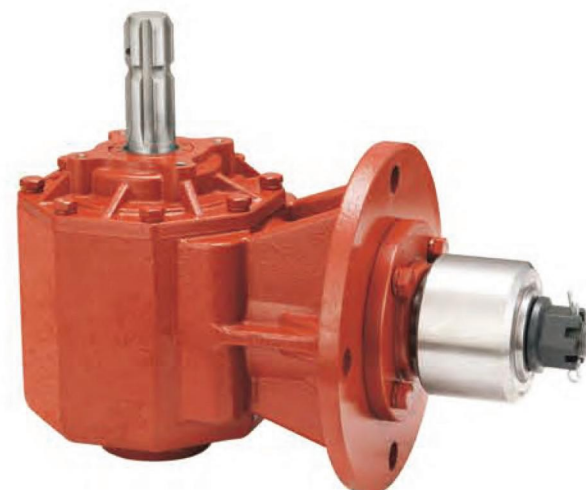


HC-RC61

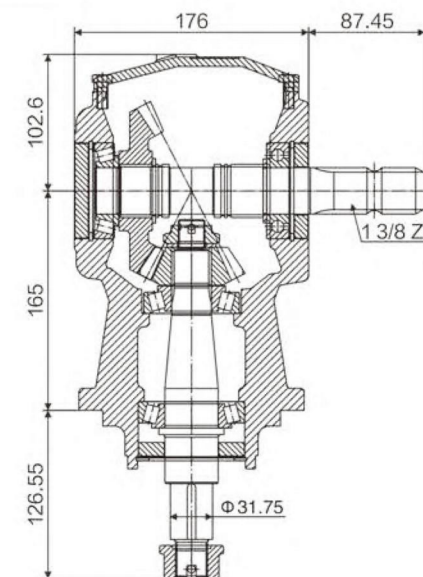


PRODUCT PARAMETERS

ITEM	HC-01-790 / HC-01-793
Ratio	1:1.92 / 1:2.5
Teeth	25/13 / 30/12
Module	5.25 / 3.9
Power(HP)	40 / 30
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 / Keyway
Weight(N.W)	23.5 Kg

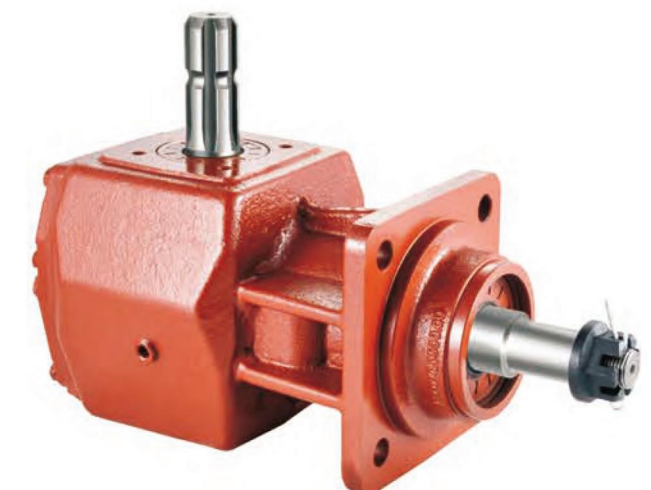


HC-01-790

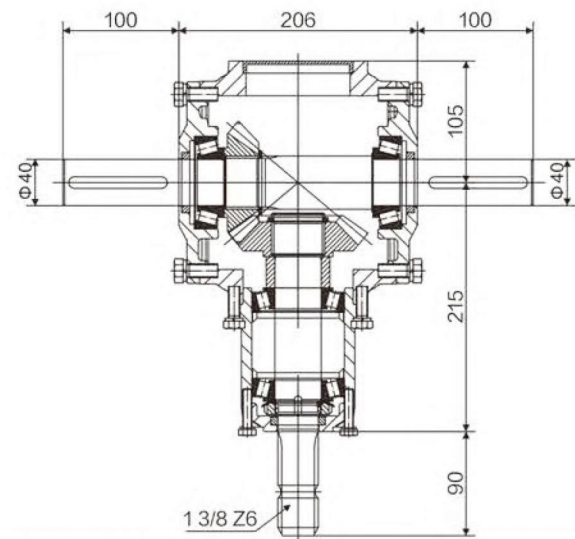

PRODUCT PARAMETERS	
ITEM	HC-0545-00
Ratio	1:1.2
Teeth	19/16
Module	6.0
Power(HP)	60
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 / Optic axis
Weight(N.W)	31Kg




HC-0545-00

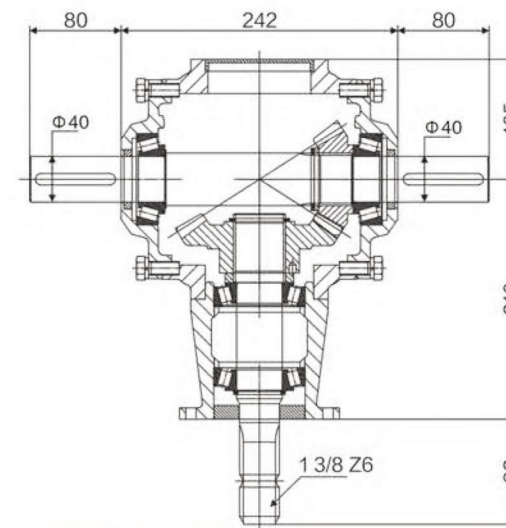

PRODUCT PARAMETERS	
ITEM	HC-PK45-006
Ratio	1:1.56
Teeth	25 /16
Module	5.75
Power(HP)	60
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6/Optic axis
Weight(N.W)	32Kg




HC-PK45-006

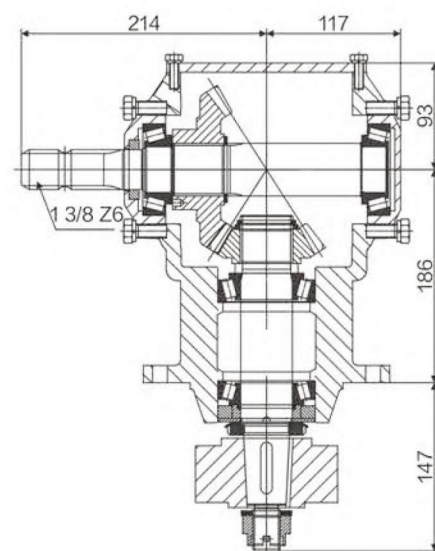

PRODUCT PARAMETERS	
ITEM	HC-PK45.009.00
Ratio	1:1.56
Teeth	25/16
Module	5.75
Power(HP)	60
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6/Optic axis
Weight(N.W)	37Kg




HC-PK45.009.00

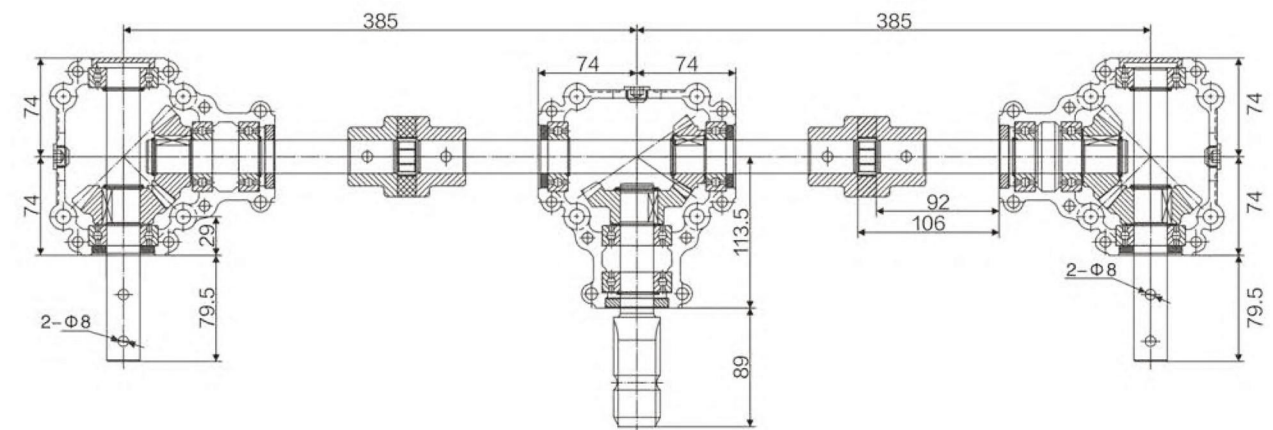

PRODUCT PARAMETERS	
ITEM	SLX-14375
Ratio	1:1.44
Teeth	23/16
Module	3.5
Power(HP)	15
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 / Ø 25
Weight(N.W)	17 Kg




SLX-14375

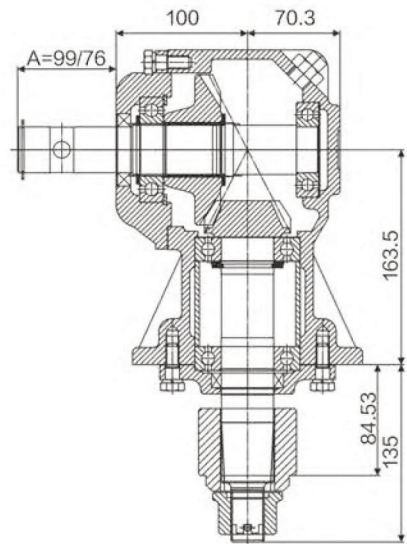

PRODUCT PARAMETERS	
ITEM	RC31
Ratio	1:1.46 / 1:1.69 / 1:1.93 / 1:2.3
Teeth	22/15 / 22/13 / 29/15 / 28/12
Module	5.08 / 5.0 / 4.0 / 4.0
Power(HP)	30
Rated Input	540 rpm
Input/Output Description	3/8 Z6 / Optic axis aper spline
Weight(N.W)	21.5Kg




RC31

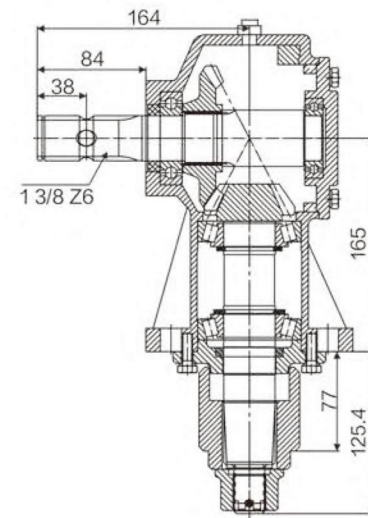

PRODUCT PARAMETERS	
ITEM	HC-GS4RC
Ratio	1:1.46 / 1:1.93
Teeth	22/15 / 23/12
Module	5.08 / 5.0
Power(HP)	30
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Taper spline
Weight(N.W)	19Kg




HC-GS4RC

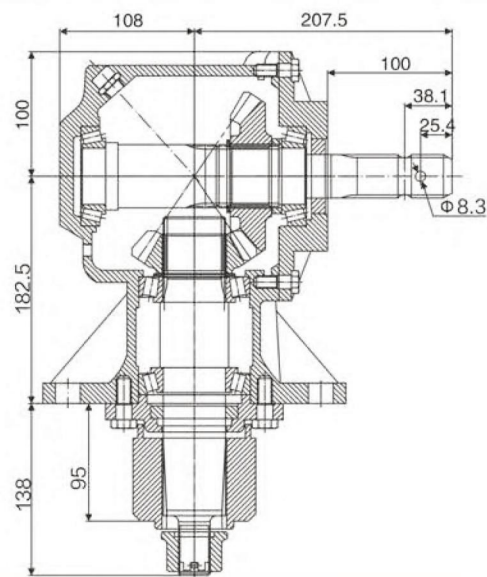


PRODUCT PARAMETERS	
ITEM	HC-966109
Ratio	1:1.46 / 1:1.93
Teeth	13/19 / 14/27
Module	7.0 / 5.5
Power(HP)	60
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 / 1 3/4 Z20 Optic ax1 STaper spline
Weight(N.W)	36.5Kg




HC-966109

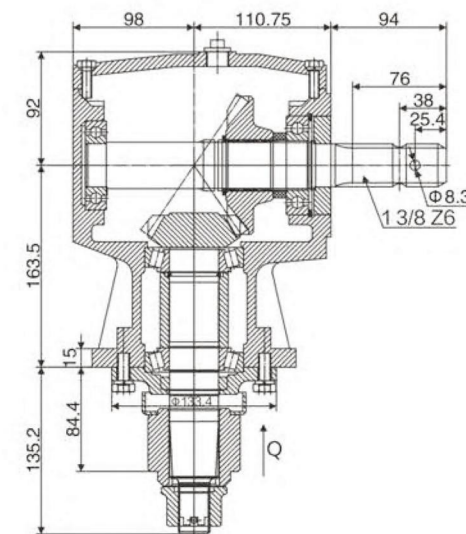

PRODUCT PARAMETERS			
ITEM	HC-01-609	HC-01-723	HC-01-611
Ratio	1:1.46	1:1.69	1:1.93
Teeth	22/15	22/13	29/15
Module	5.08	5.0	4.0
Power(HP)	35	35	30
Rated Input	540 rpm		
Input/Output Description	1 3/8 Z6 / Optic axis / Taper spline		
Weight(N.W)	26.5Kg		

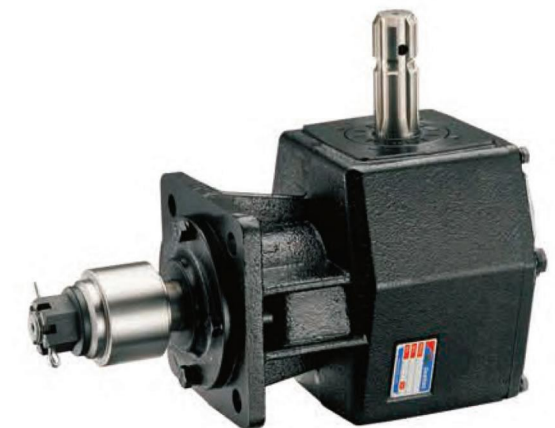


HC-01-609

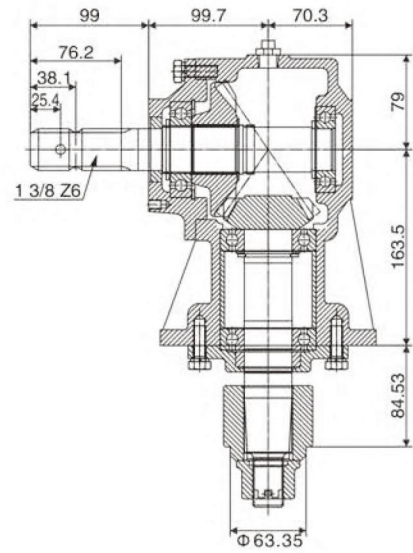


PRODUCT PARAMETERS

ITEM	HC-RC33
Ratio	1:93 / 1:1.69 / 1:1.47
Teeth	15/29 / 13/22 / 15/22 .
Module	4.0 / 5.0 / 5.08
Power(HP)	30 / 30 / 30
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 / Optic axis
Weight(N.W)	26 Kg

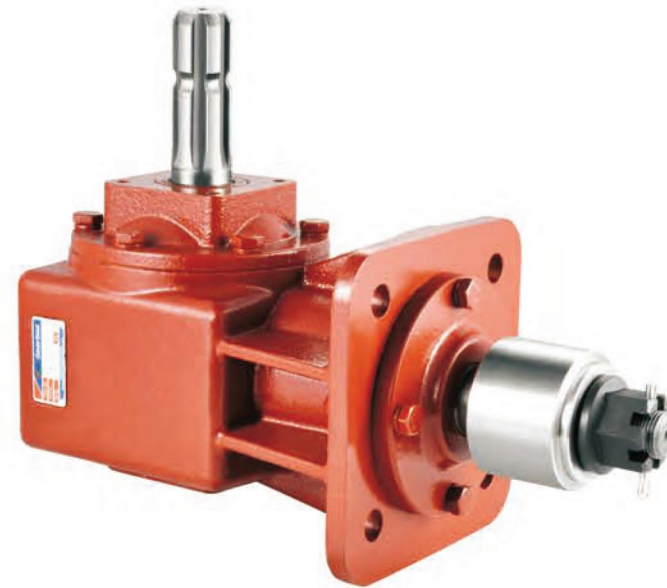


HC-RC33

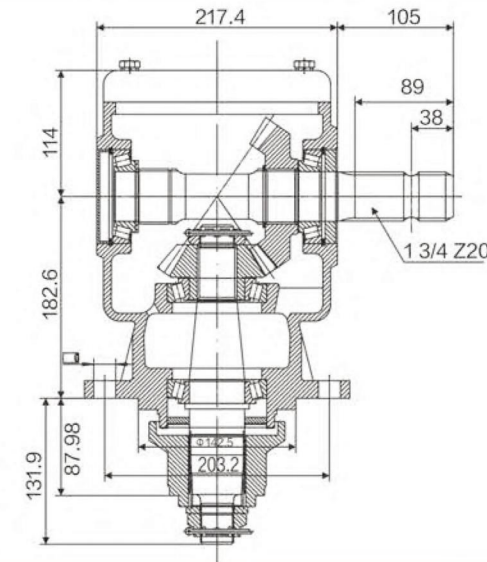

ITEM	HC-01-707
Ratio	1:1.44
Teeth	23/16
Module	6
Power(HP)	60
Rated Input	540 rpm
Input/Output Description	1 3/4 Z20 / Taper spline
Weight(N.W)	37 Kg



HC-01-707

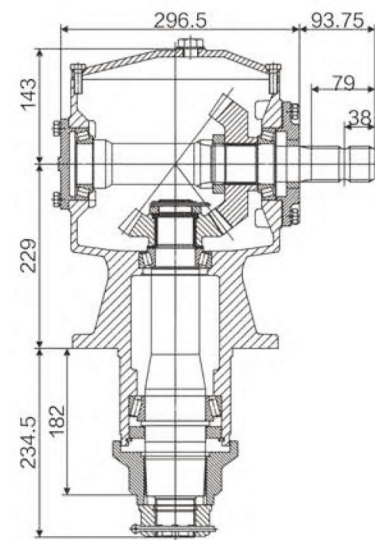


PRODUCT PARAMETERS

ITEM	HC-01-768 / HC-01-770
Ratio	1:1.93 / 1:1
Teeth	23/12 / 22/22
Module	8 / 8
Power(HP)	150 / 150
Rated Input	540 rpm
Input/Output Description	1 3/4 Z20 / Taper spline
Weight(N.W)	73 Kg



HC-01-768

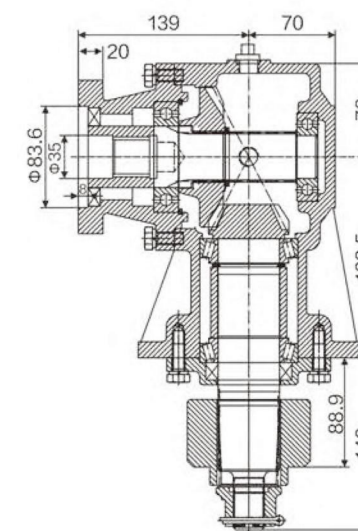

PRODUCT PARAMETERS



ITEM	HC-RC51
Ratio	1:1.47 / 1:1.93
Teeth	22/15 / 29/15
Module	5.08 / 4.0
Power(HP)	50
Rated Input	540 rpm
Input/Output Description	Spline / Taper spline
Weight(N.W)	29Kg




HC-RC51

ROTARY TILLER GEARBOX
FLAIL MOWER GEARBOX

ROTARY CULTIVATOR SERIES
GEARBOX

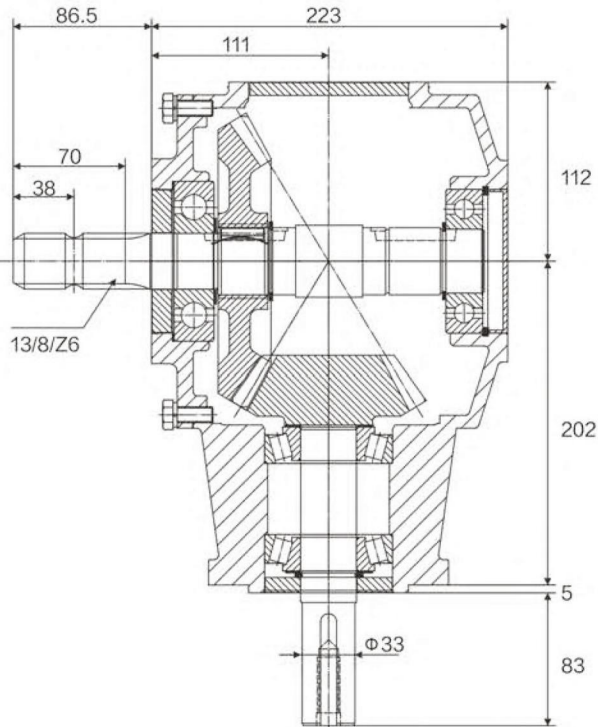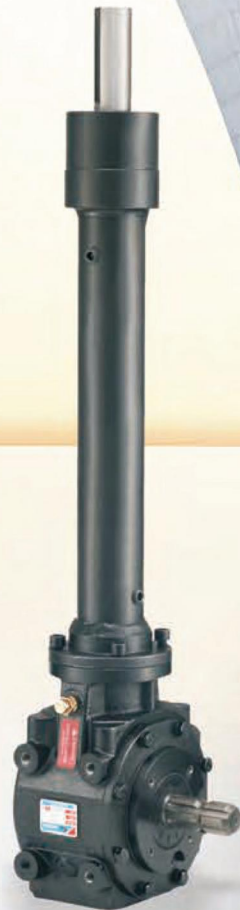


PRODUCT PARAMETERS	
ITEM	HC-75
Ratio	1:3 / 1:2.83 / 1:1.65 / 1:1.6
Teeth	12/36 / 34/12 / 33/20 / 24/15
Module	6.0 / 5.35 / 5.5 / 7.5
Power(HP)	75 / 75 / 100 / 125
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Optic axis
Weight(N.W)	37Kg

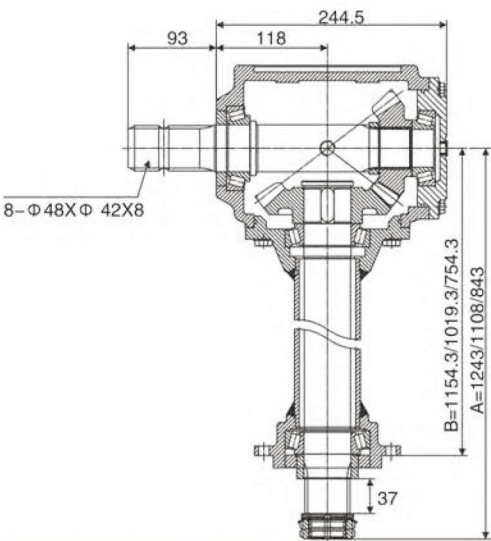


PRODUCT PARAMETERS	
ITEM	HC20100.131.00
Ratio	1.31:1
Teeth	16/21
Module	7.0
Power(HP)	100
Rated Input	600 rpm
Input/Output Description	8-Φ48 x Φ42X8
Weight(N.W)	58Kg



HC20100.131.00

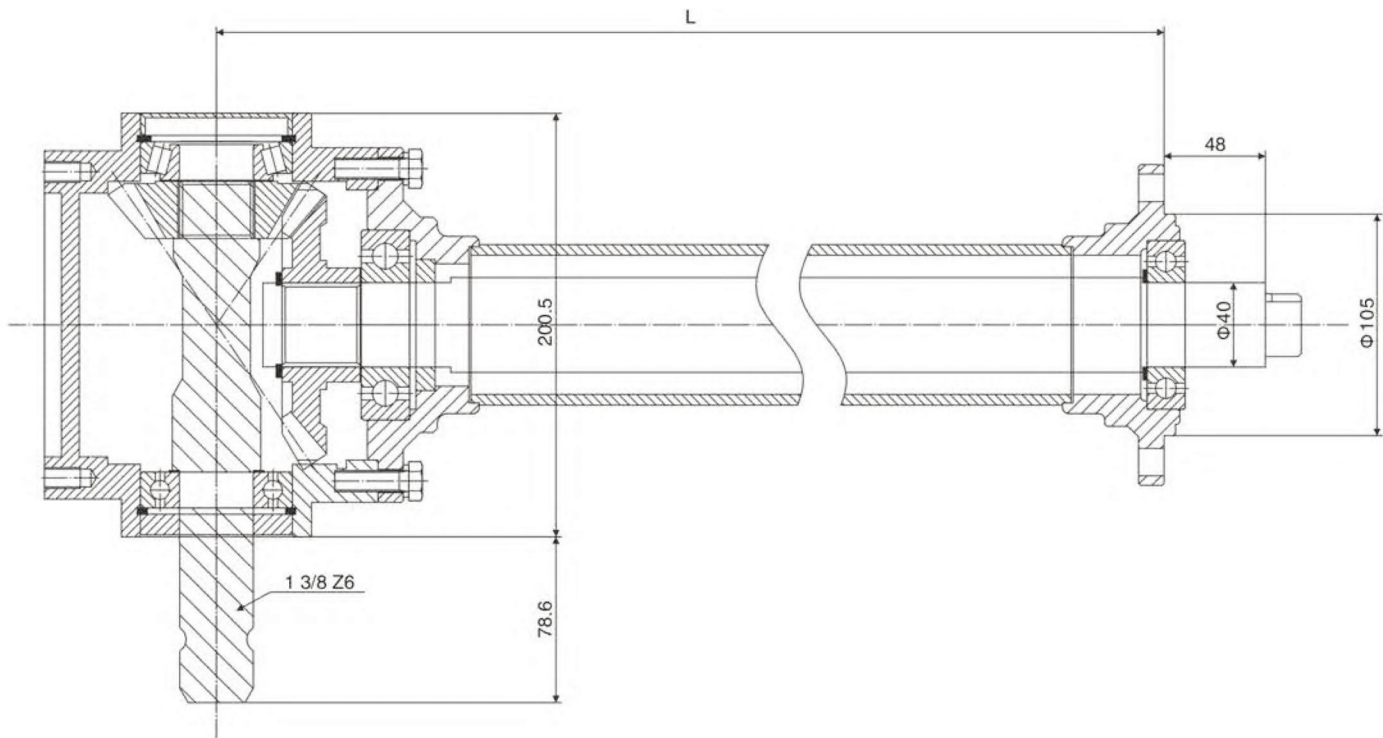

HC-RTM130

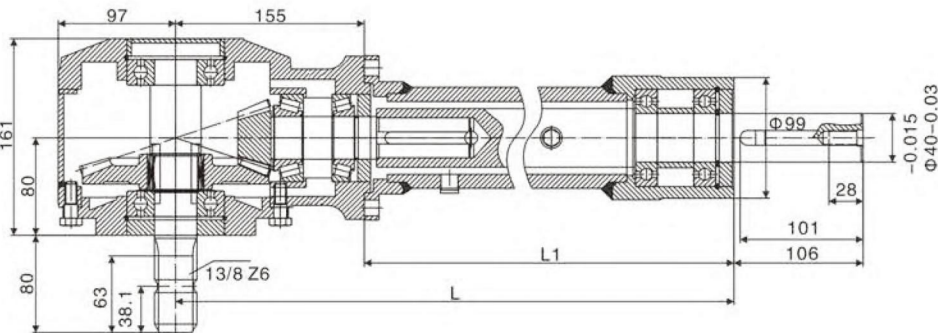


PRODUCT PARAMETERS	
ITEM	HC-9.311-JCG
Ratio	1:3
Teeth	36/12
Module	4.35
Power(HP)	50
Rated Input	540rpm
Input/Output Description	1 3/8 Z6/ Optic axis /Optic axis
Weight(N.W)	41Kg



HC-9.311-JCG

length	SERIES													
	-1	-2	-3	-4	-5	-6	-7	-8	-9	-10	-11	-12	-13	-14
L	375	500	615	670	700	780	810	950	1060	1140	1200	1250	1350	1500
L1	220	345	460	515	545	625	655	795	905	985	1045	1095	1195	1345

型号	RTM (DR) 105	RTM (DR) 120	RTM (DR) 130	RTM (DR) 135		RTM (DR) 150		RTM (DR)165
长度L	524	599	649	674		749		824
传动比 i	输入转速 rpm	输入功率		Z1	Z2	M	重量 kg	
		HP	Kw					
1:1.46	540	45	33	15	22	6.0	31	

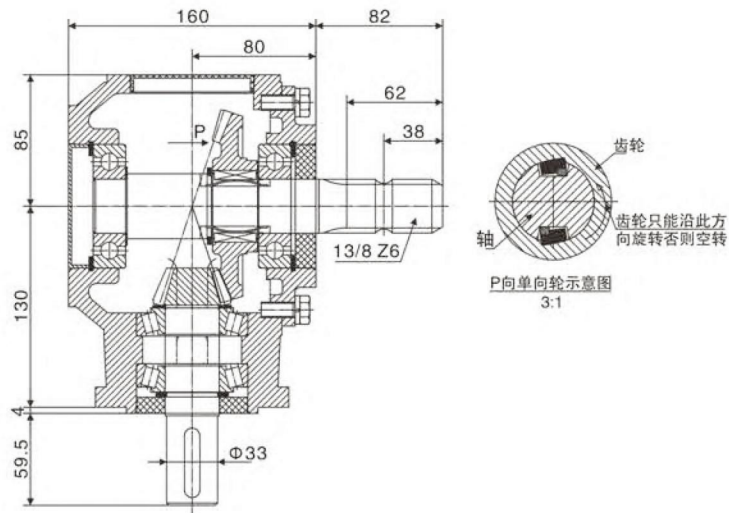


PRODUCT PARAMETERS

ITEM	HC-9.310
Ratio	1:3
Teeth	12/36
Module	3.45
Power(HP)	30
Rated Input	540rpm
Input/Output Description	1 3/8 Z6 Optic axis
Weight(N.W)	18Kg



HC-9.310

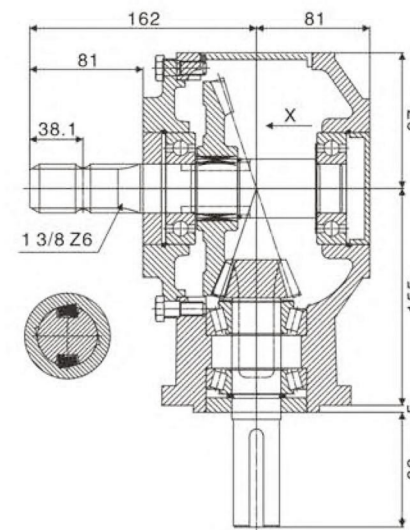


PRODUCT PARAMETERS

ITEM	HC-9.311
Ratio	1:3
Teeth	36/12
Module	4.35
Power(HP)	50
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Optic axis /Optic axis
Weight(N.W)	21Kg



HC-9.311

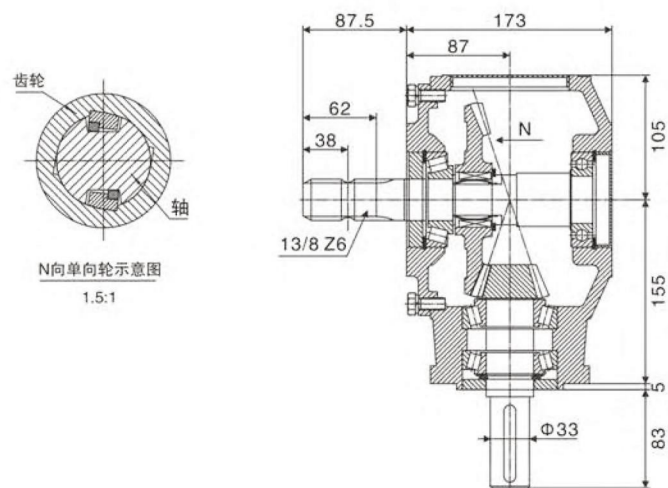


PRODUCT PARAMETERS

ITEM	HC-9.312
Ratio	1:3
Teeth	12/36
Module	4.58
Power(HP)	62
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Optic axis
Weight(N.W)	27Kg



HC-9.312

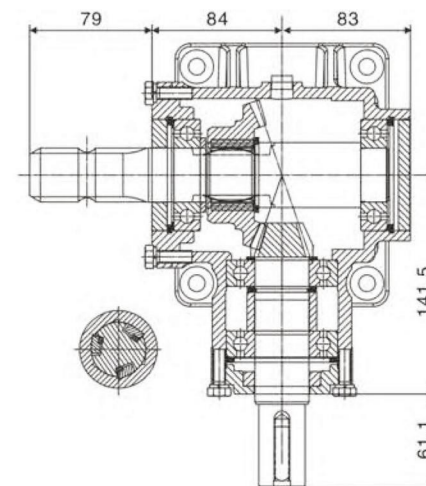

PRODUCT PARAMETERS

ITEM	HC30
Ratio	1:2.9
Teeth	32/11
Module	3.0
Power(HP)	30
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Optic axis
Weight(N.W)	13.5Kg




HC30

FERTILIZER SPREADER GEARBOX




HC-RV022 (X)

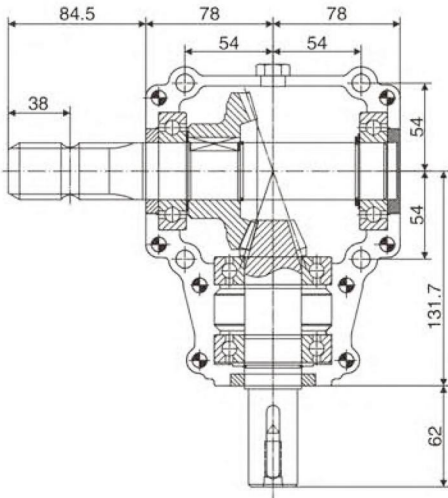


PRODUCT PARAMETERS	
ITEM	HC-RV022 (X)
Ratio	1:1 / 1.46:1 / 1:2.91
Teeth	19/19 / 19/13 / 32/11
Module	4.5 / 5.0 / 3.0
Power(HP)	15
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Optic axis
Weight(N.W)	7Kg



HC-RV010

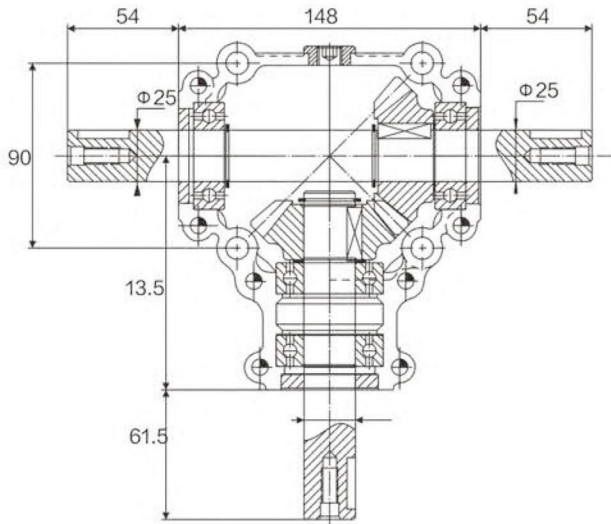


PRODUCT PARAMETERS	
ITEM	HC-RV010
Ratio	1:1 / 1:1.35 / 1:1.9 / 3.3:1
Teeth	16/16 / 17/23 / 10/19 / 10/33
Module	4.5 / 3.5 / 4.5 / 2.5
Power(HP)	15 / 13 / 15 / 3
Rated Input	450 rpm
Input/Output Description	1 3/8 Z6 / Optic axis
Weight(N.W)	4Kg

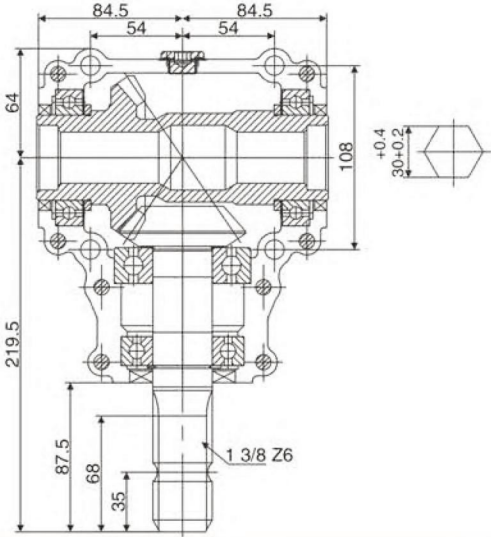

HC-01-674

PRODUCT PARAMETERS


ITEM	HC-01-674
Ratio	1.46:1
Teeth	19/13
Module	5
Power(HP)	23
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6
Weight(N.W)	7. 2Kg

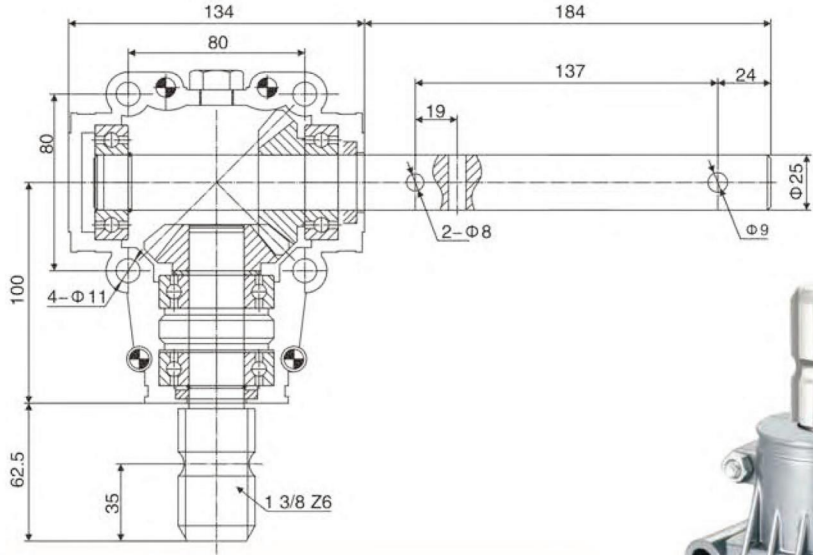

HC-RV012

PRODUCT PARAMETERS


ITEM	HC-RV012
Ratio	1:1
Teeth	15/15
Module	4.5
Power(HP)	10
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6
Weight(N.W)	4Kg

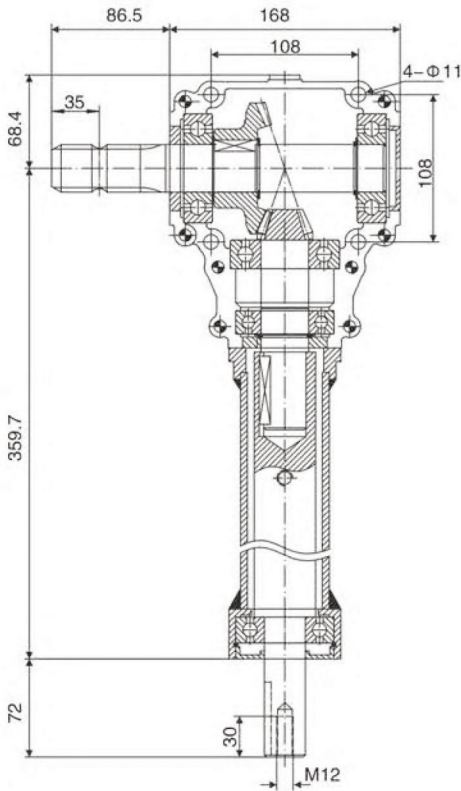

HCAM281-874

PRODUCT PARAMETERS

ITEM	HCAM281-874
Ratio	1:2.91
Teeth	32/11
Module	3.0
Power(HP)	13
Rated Input	540 rpm
Input/Output Description	1 3/8 26
Weight(N.W)	19 Kg

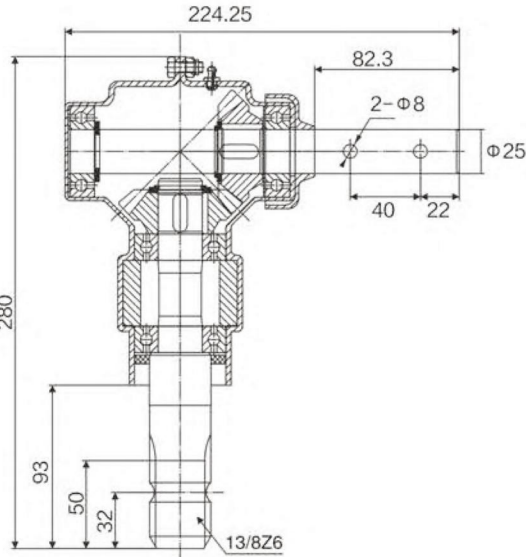


HC-01-229

PRODUCT PARAMETERS


ITEM	HC-01-229
Ratio	1:1
Teeth	16/16
Module	4.5
Power(HP)	15
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Φ25 Optic axis
Weight(N.W)	13Kg

POST HOLE DIGGER


GEARBOX

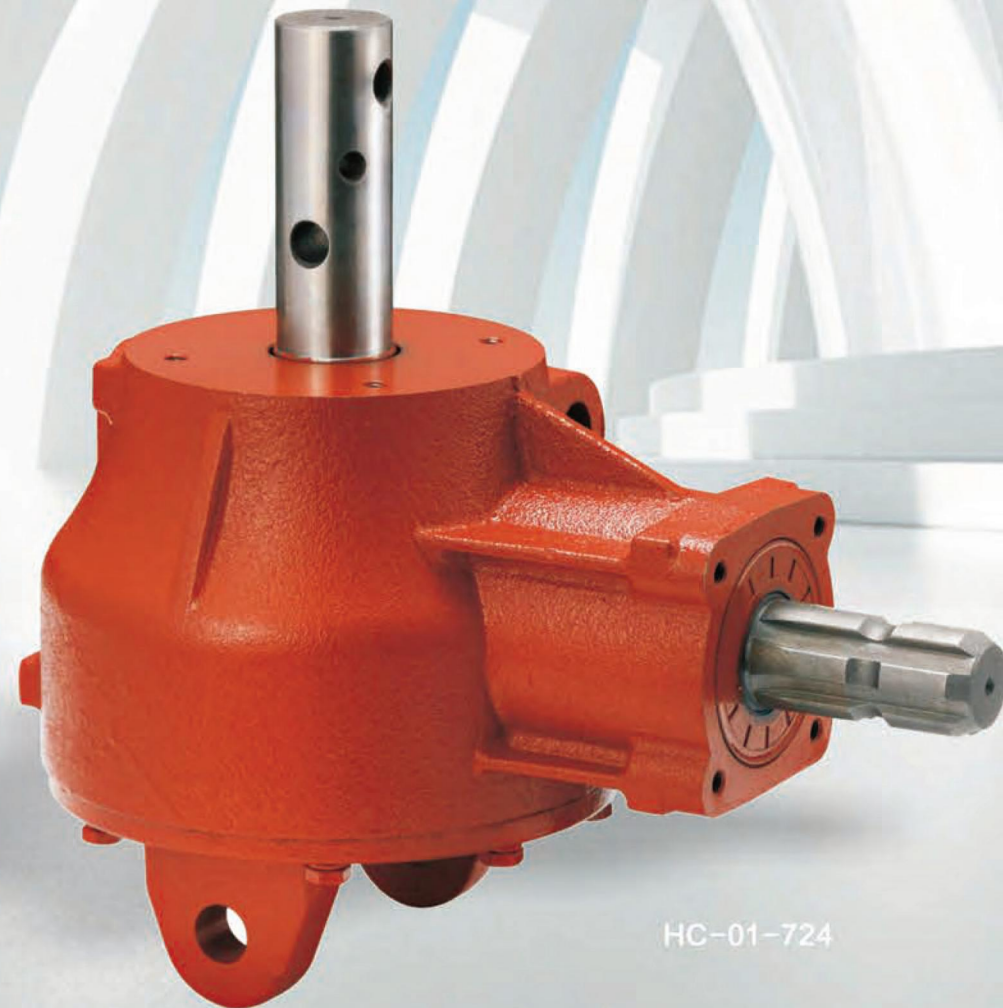

HC-01-724

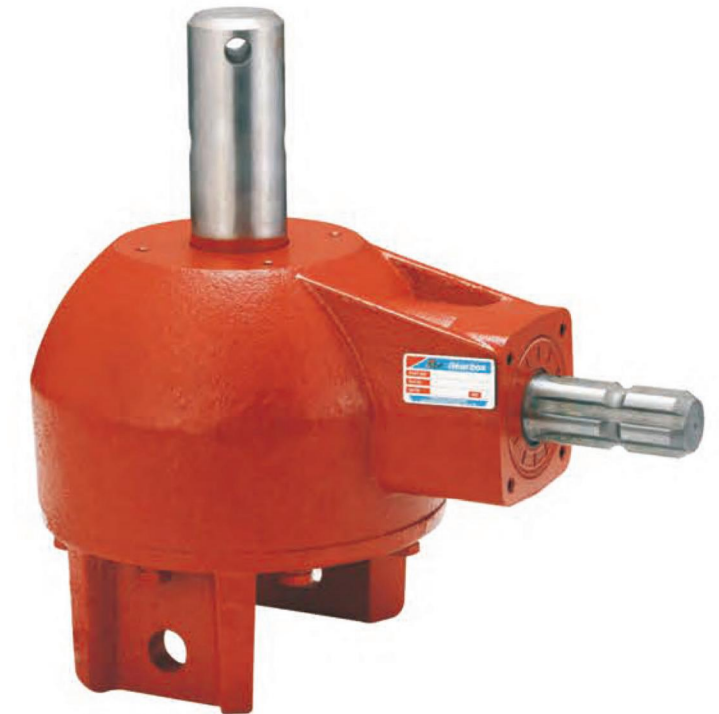


HC-GT40U

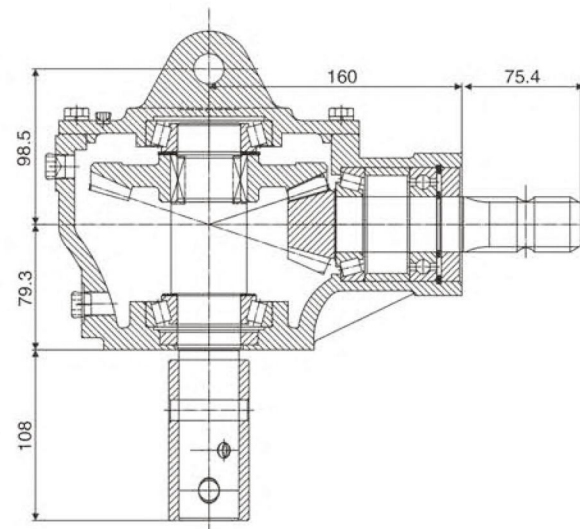


PRODUCT PARAMETERS

ITEM	HC-01-724
Ratio	3:1
Teeth	10/30
Module	5.0
Power(HP)	30
Rated Input	540rpm
Input/Output Description	1 3/8 Z6 Optic axis
Weight(N.W)	19Kg

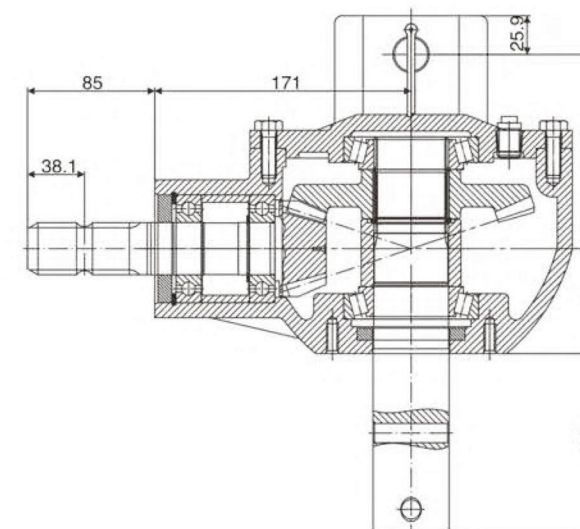

PRODUCT PARAMETERS

ITEM	HC-GT40U
Ratio	3:1
Teeth	33/11
Module	5.0
Power(HP)	45
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Optic axis
Weight(N.W)	28 Kg

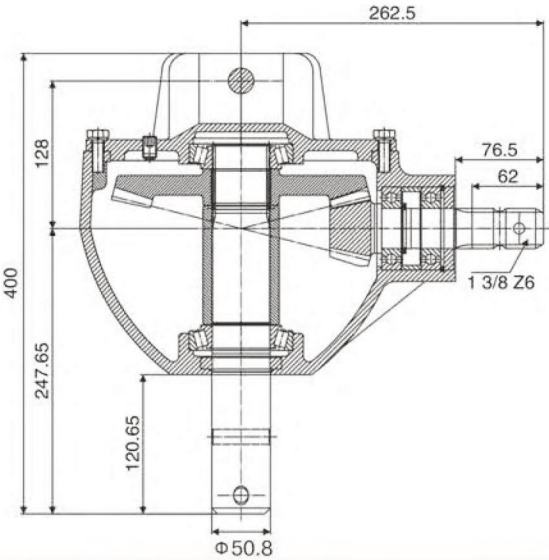


PRODUCT PARAMETERS

ITEM	HC-01-084
Ratio	4:1
Teeth	11/44
Module	5.0
Power(HP)	50
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 / Optic axis
Weight(N.W)	44 Kg



HC-01-084

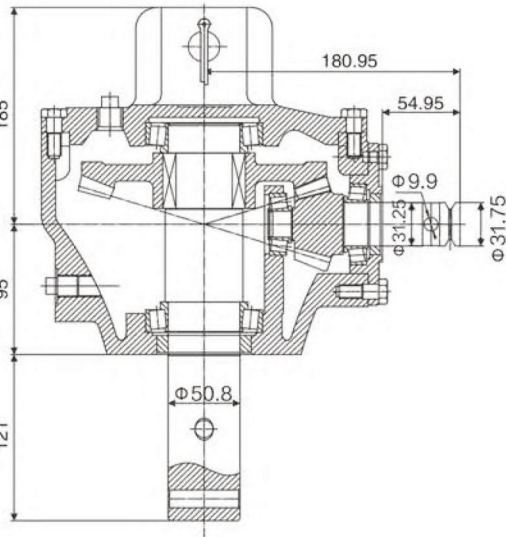


PRODUCT PARAMETERS

ITEM	HC-01-725
Ratio	3.18:1
Teeth	11/35
Module	5.08
Power(HP)	40
Rated Input	540 rpm
Input/Output Description	Optic ax1S
Weight(N.W)	28Kg



HC-01-725

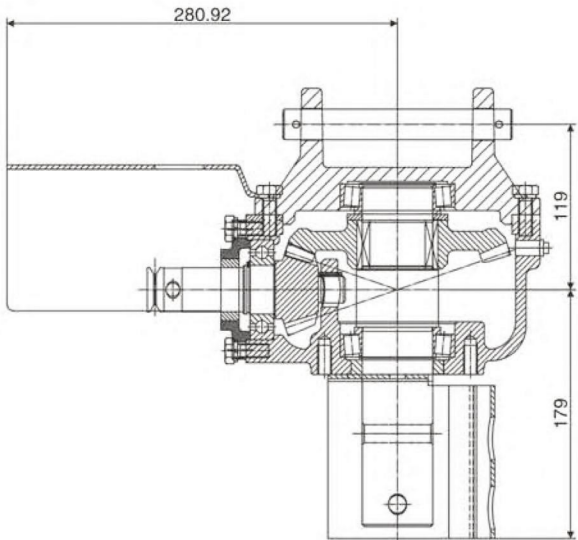


PRODUCT PARAMETERS

ITEM	HC-650PHD
Ratio	2.92:1
Teeth	13/38
Module	4.25
Power(HP)	30
Rated Input	540 rpm
Input/Output Description	Optic axis
Weight(N.W)	21.8 Kg



HC-650PHD

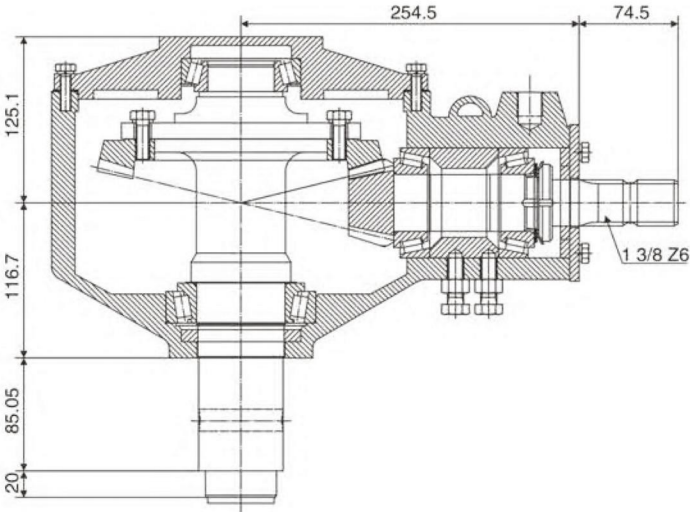

PRODUCT PARAMETERS

ITEM	HC-2300058
Ratio	4.08:1
Teeth	12/49
Module	4.5
Power(HP)	50
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 / Optic axis
Weight(N.W)	59 Kg




HC-2300058

LAWN MOWER SERIES GEARBOX



HC-BGB9

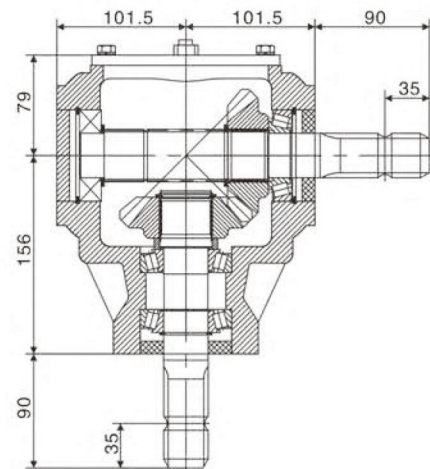


PRODUCT PARAMETERS

ITEM	HC-BGB9
Ratio	1:1 / 1:1.35 / 1:1.46 / 1:2
Teeth	16/16 / 23/17 / 22/15 / 15/30
Module	6.35 / 5.0 / 5.0 / 3.5
Power(HP)	30
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 / 13/8Z6 Optic axis
Weight(N.W)	23 Kg



HC-68°

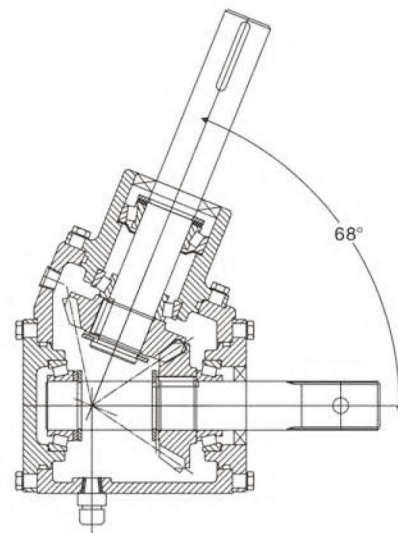


PRODUCT PARAMETERS

ITEM	HC-68°
Ratio	1:1
Teeth	19/19
Module	4.23
Power(HP)	30
Rated Input	540 rpm
Input/Output Description	Optic axis / Spline
Weight(N.W)	13.2 Kg




HC-9.259

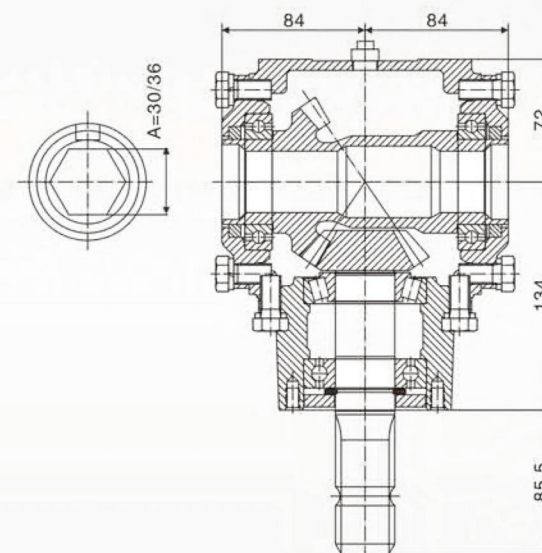

PRODUCT PARAMETERS

ITEM	HC-9.259
Ratio	1.46:1
Teeth	19/13
Module	5.0
Power(HP)	30
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Optic axis
Weight(N.W)	14 Kg

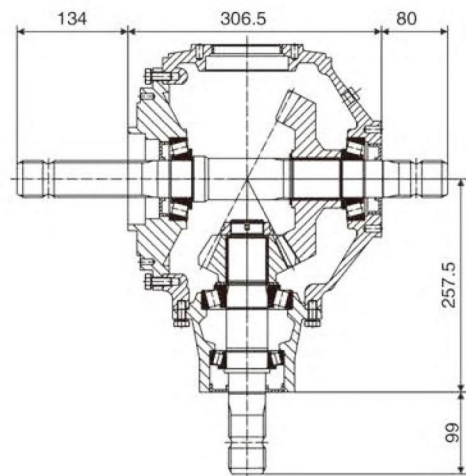


PRODUCT PARAMETERS

ITEM	HC-T301
Ratio	1.93:1
Teeth	15/29
Module	7.3
Power(HP)	105
Rated Input	540 rpm
Input/Output Description	1 3/4 Z6
Weight(N.W)	62 Kg



HC-T301

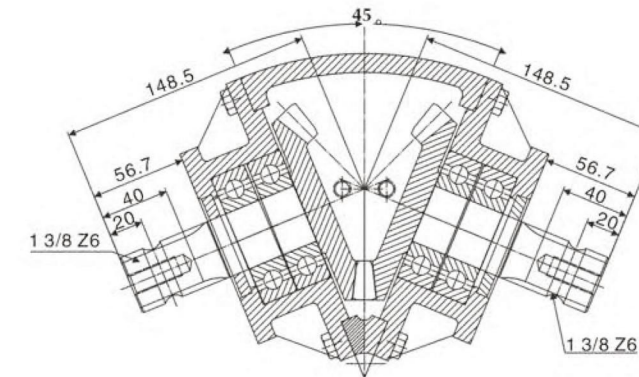


PRODUCT PARAMETERS

ITEM	HC-AG135
Ratio	1:1
Teeth	20/20
Module	6.0
Power(HP)	50
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Cone base aequilate spline shaft
Weight(N.W)	16.5Kg



HC-AG135

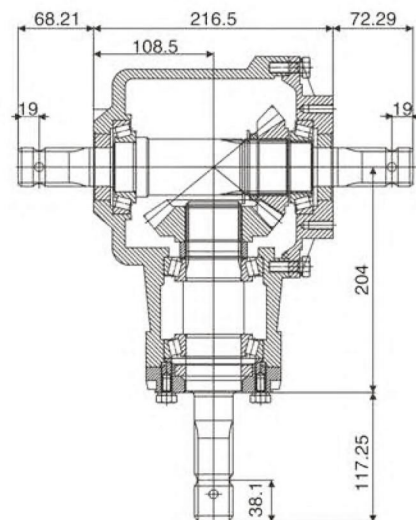


PRODUCT PARAMETERS

ITEM	HC-RC61T
Ratio	1:1 / 1:1.21 / 1:1.46 / 1:1.93
Teeth	16/16 / 17/14 / 19/13 / 27/14
Module	7.0 / 7.0 / 7.0 / 5.5
Power(HP)	60
Rated Input	540rpm
Input/Output Description	1 3/8 Z6 / 1 3/8 Z6
Weight(N.W)	33.5 Kg



HC-RC61T

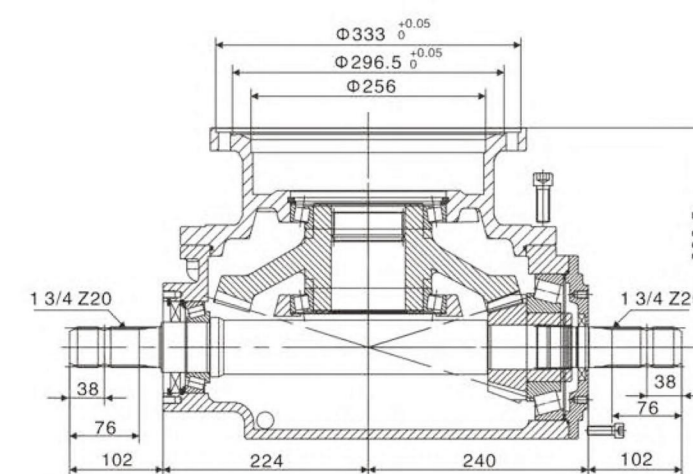


PRODUCT PARAMETERS

ITEM	HC-40002
Ratio	3.2:1 / 3.77:1 / 4.17:1
Teeth	15/48 / 13/49 / 12/50
Module	15/48 / 13/49 / 12/50
Power(HP)	85/85/85
Rated Input	540 rpm
Input/Output Description	1 3/4 Z6
Weight(N.W)	111 Kg



HC-40002

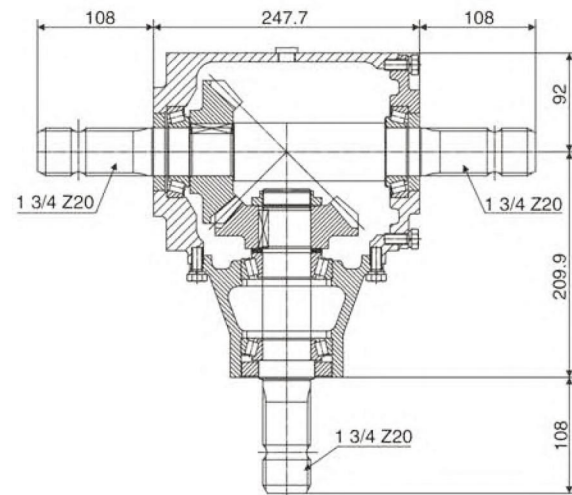


PRODUCT PARAMETERS


ITEM	HC-9.279
Ratio	1:1.5 / 1:1
Teeth	27/18 / 22/22
Module	5.7 / 6
Power(HP)	100 / 120
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6
Weight(N.W)	38Kg



HC-9.279

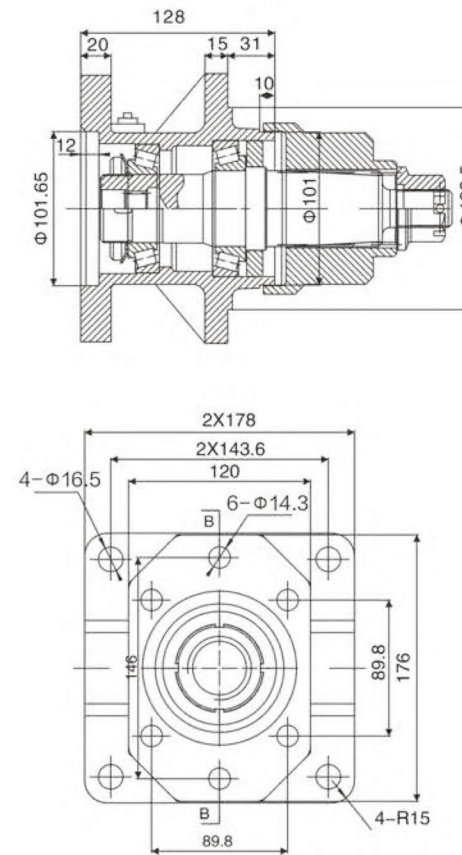

HC-MDH-40

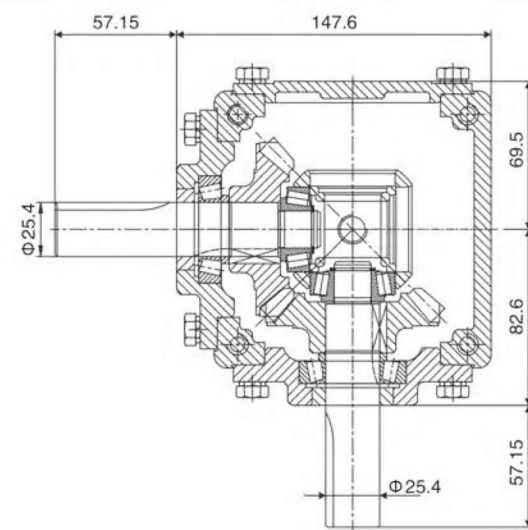


PRODUCT PARAMETERS


ITEM	HC-19455-KW
Ratio	1:1
Teeth	19 / 19
Module	4.23
Power(HP)	20
Rated Input	540 rpm
Input/Output Description	φ 25 Optical axis
Weight(N.W)	9 Kg



HC-19455-KW

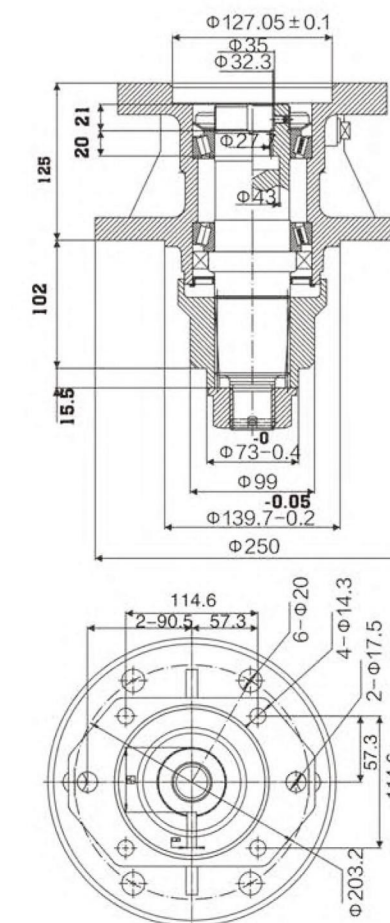


HC-MDH-65

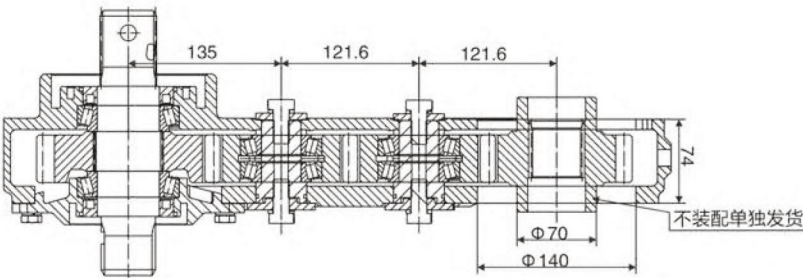


HC-1ZS-380

PRODUCT PARAMETERS	
ITEM	HC-1ZS-380
Ratio	1:1.24
Teeth	21/17 / 17/17
Module	7.0
Power(HP)	100
Rated Input	540 rpm
Input/Output Description	Spline
Weight(N.W)	42.5 Kg

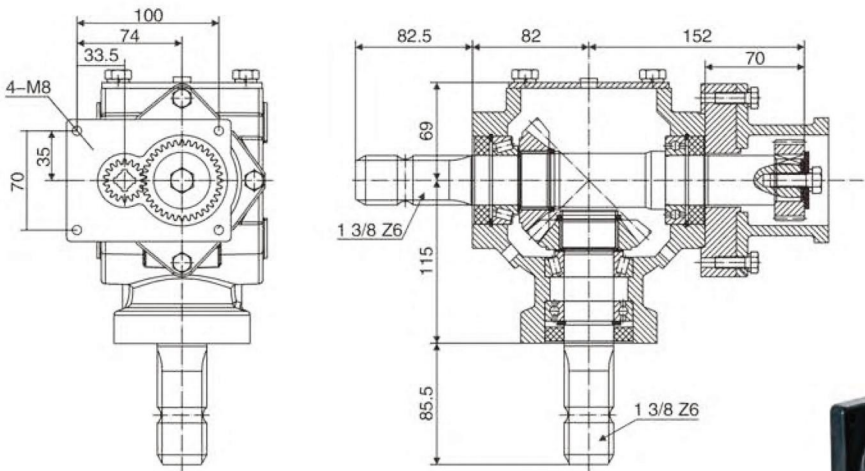


HC-20. 100J. 01WW

PRODUCT PARAMETERS	
ITEM	HC-20. 100J. 01WW
Ratio	1:1
Teeth	15 / 15
Module	5.4
Power(HP)	30
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6
Weight(N.W)	16Kg

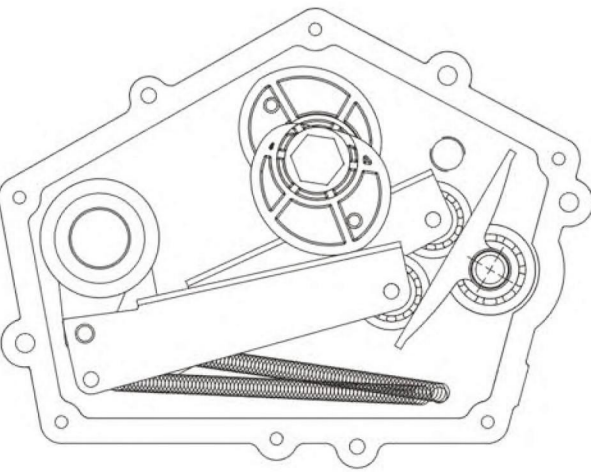


HC-01-778

PRODUCT PARAMETERS	
ITEM	HC-01-778
Ratio	0:1 / 3.35:1
Rated Input	540 rpm
Input/Output Description	φ 20
Weight(N.W)	11. 5Kg

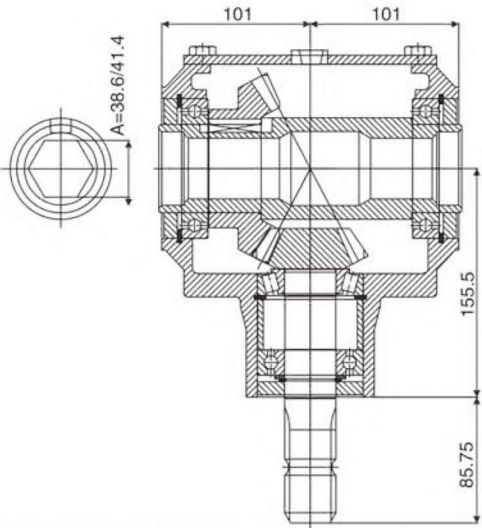

HC-01-672


PRODUCT PARAMETERS	
ITEM	HC-01-672
Ratio	1.92:1 / 1.47:1
Teeth	23/12 / 22/15
Module	5.5 / 5.65
Power(HP)	40
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 / Optic axis
Weight(N.W)	18.5 Kg

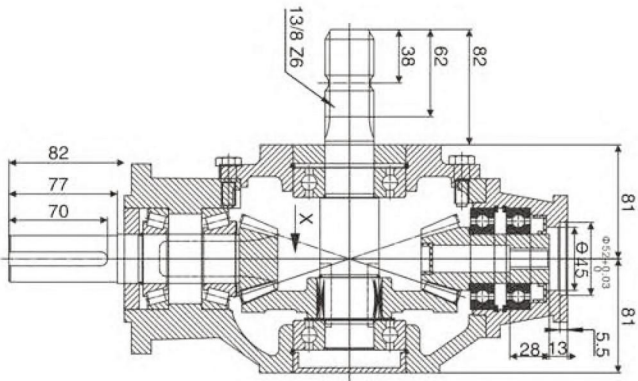

PRODUCT PARAMETERS	
ITEM	HC-9.311-17W
Ratio	1:3
Teeth	36 / 12
Module	4.35
Power(HP)	50
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6/ Optic axis /Optic axis
Weight(N.W)	25Kg




HC-9.311-17W

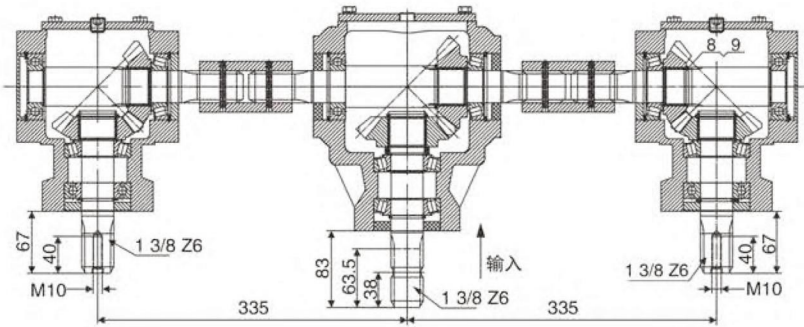


PRODUCT PARAMETERS	
ITEM	HC-BGB8
Ratio	1:1 / 1.67:1
Teeth	22/15 / 15/25
Module	5.08 / 4.0
Power(HP)	30
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 / 1 3/8 Z6
Weight(N.W)	18Kg



HC-BGB8

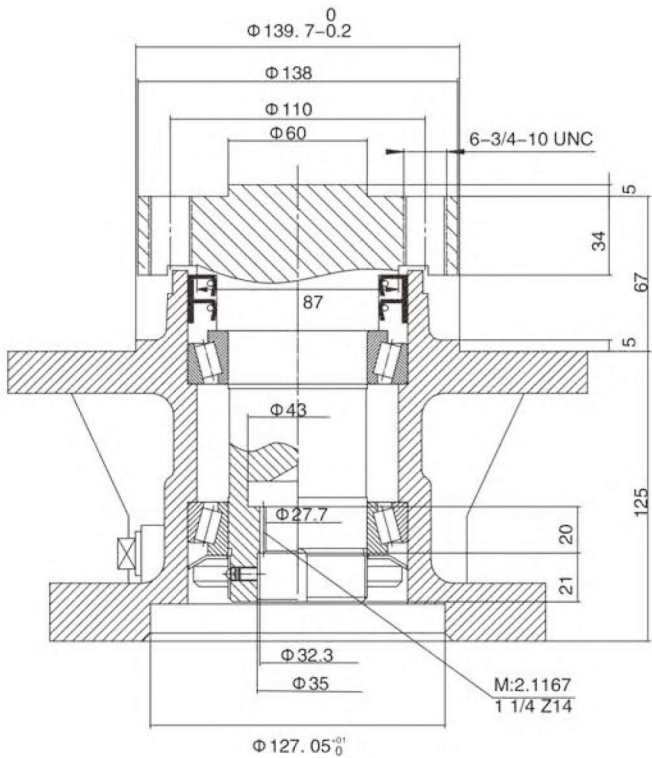



HC 01 661

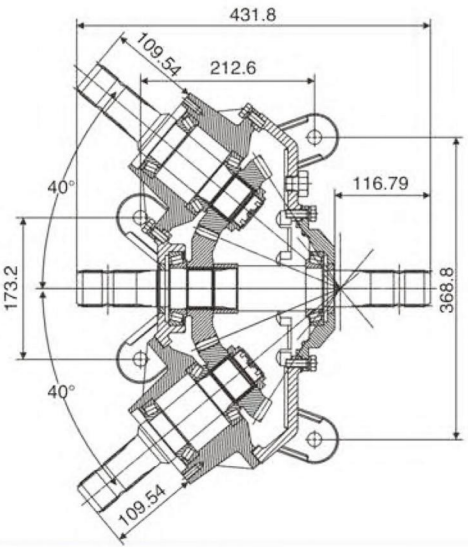

PRODUCT PARAMETERS	
ITEM	HC 01 661
Ratio	1:1.3
Teeth	26/20
Module	5.644
Power(HP)	80
Rated Input	540 rpm
Input/Output Description	1 3/4 Z20
Weight(N.W)	57. 5Kg



HC 01 662

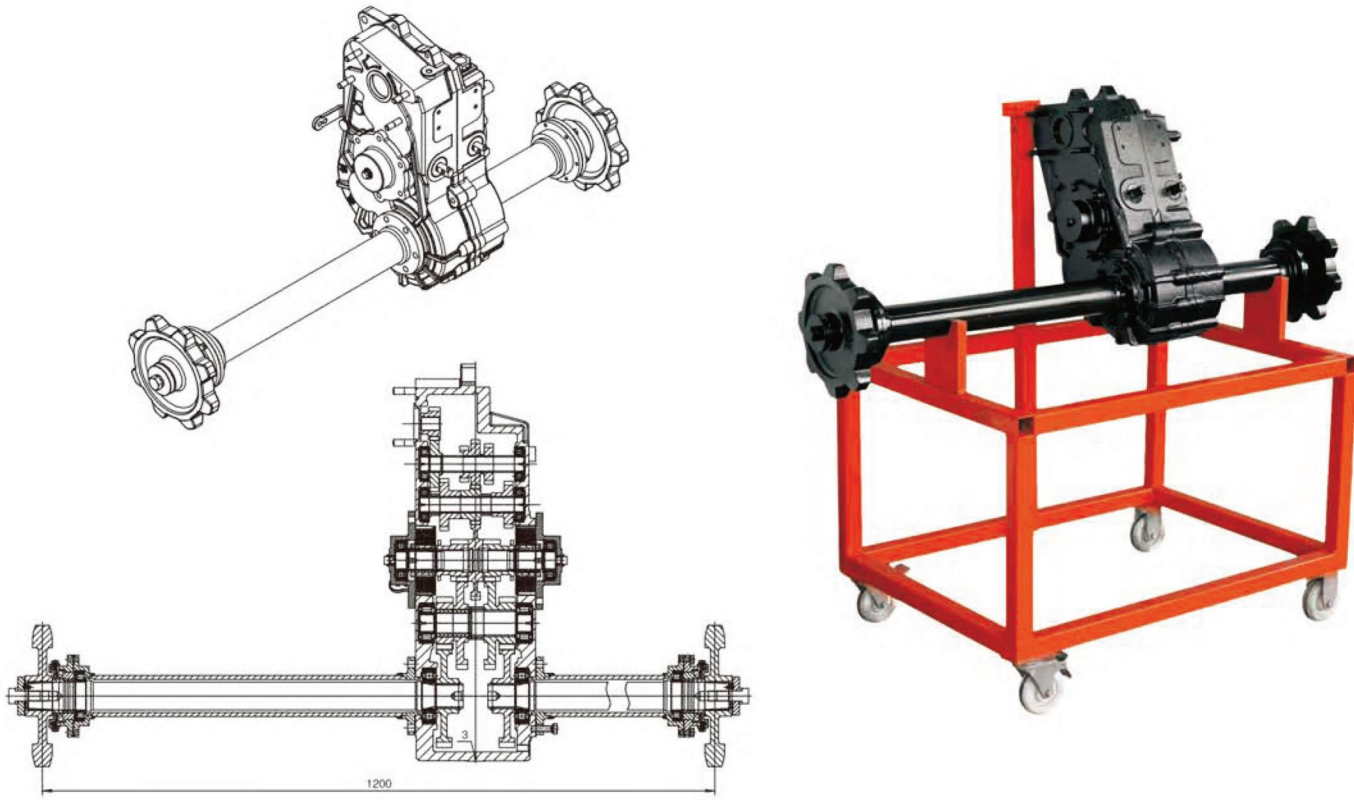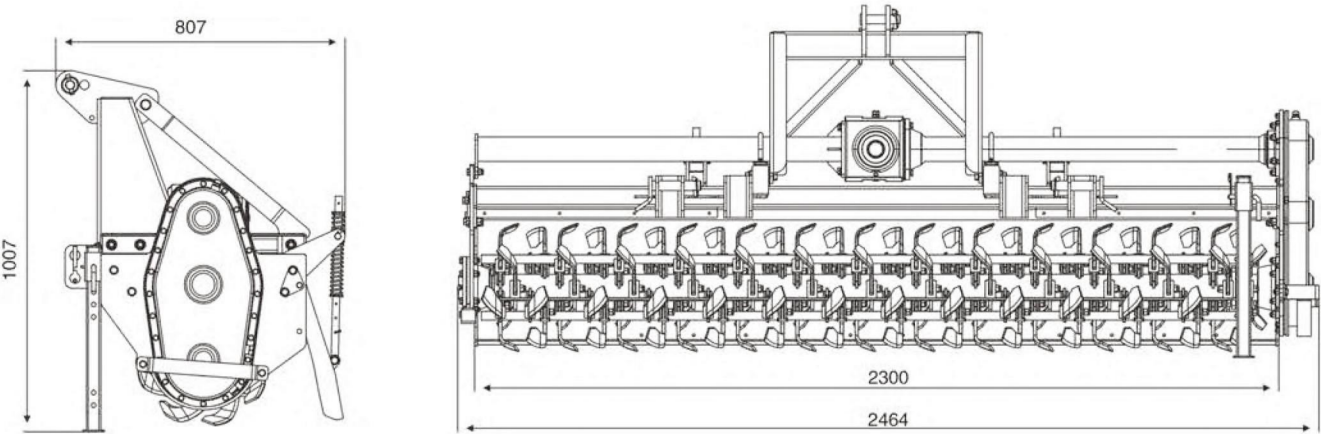

PRODUCT NAME	PADDY FIELD PULPING MACHINE
PRODUCT MODEL	1JSG230
external dimensions	2460 × 810 × 1010
Structural weight	
Width of working range	230
Supporting horsepower	≥ 50
Number of rotary tiller knives	106
Rotary tillage depth	15
PTO Input speed	540

